

CONFIDENTIAL

365

Copy
RM L56J03

RESEARCH MEMORANDUM

STATIC LONGITUDINAL CHARACTERISTICS AT HIGH SUBSONIC SPEEDS
OF A COMPLETE AIRPLANE MODEL WITH A HIGHLY TAPERED WING
HAVING THE 0.80 CHORD LINE UNSWEPT AND
WITH SEVERAL TAIL CONFIGURATIONS

By Kenneth W. Goodson

Langley Aeronautical Laboratory
Langley Field, Va.

CLASSIFIED DOCUMENT

This material contains information affecting the National Defense of the United States within the meaning of the espionage laws, Title 18, U.S.C., Secs. 793 and 794, the transmission or revelation of which in any manner to an unauthorized person is prohibited by law.

NATIONAL ADVISORY COMMITTEE
FOR AERONAUTICS

WASHINGTON

January 10, 1957

CLASSIFICATION CHANGED TO UNCLASSIFIED
AUTHORITY: NACA RESEARCH ABSTRACT NO. 128
EFFECTIVE DATE: JUNE 24, 1958
WHL

CONFIDENTIAL

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

RESEARCH MEMORANDUM

STATIC LONGITUDINAL CHARACTERISTICS AT HIGH SUBSONIC SPEEDS
OF A COMPLETE AIRPLANE MODEL WITH A HIGHLY TAPERED WING
HAVING THE 0.80 CHORD LINE UNSWEPT AND
WITH SEVERAL TAIL CONFIGURATIONS

By Kenneth W. Goodson

SUMMARY

An investigation was made at high subsonic speeds of a complete model having a highly tapered wing and several tail configurations. The basic aspect-ratio-4.00 wing had zero taper and an unswept 0.80 chord line. Several aspect-ratio modifications to the basic wing were made by clipping off portions of the wing tips. The complete model was tested with a chord-plane tail, a T-tail, and a biplane tail (combined T-tail and chord-plane tail). The model was tested in the Langley high-speed 7- by 10-foot tunnel at Mach numbers from 0.60 to 0.92.

The data show that, when reduced to the same static margin, all the tail configurations tested on the model provided fairly good stability characteristics, the biplane tail giving the best overall characteristics as regards pitching-moment linearity. Changes in static margin at zero lift coefficient with Mach number were small for the model with these tails over the Mach number range investigated.

INTRODUCTION

Many research and production-type high-speed airplanes experience abrupt changes in longitudinal stability at moderate and high lift coefficients, particularly when flying at high subsonic and transonic speeds. Investigations of thin-wing models having various sweep angles, aspect ratios, and taper ratios (refs. 1 to 4) have shown that the tail-off (wing or wing-fuselage) contribution to the pitching-moment nonlinearity can be minimized by proper selection of wing plan form. One such investigation (ref. 1) on small-scale, thin, highly tapered wings indicated

CONFIDENTIAL

that minimum nonlinearity of the variation of pitching moment with lift at subsonic and transonic speeds was obtained when the line of zero sweep is a constant-percent chord line lying between the 0.75 chord line and the trailing edge. An additional attractive feature of highly tapered wing plan forms is that they are known to offer certain structural advantages over wings of less taper.

The present investigation was undertaken to determine whether the results obtained from the small-scale wing-alone tests could be applied to a model at higher Reynolds numbers and to obtain complete-model data. An aspect-ratio-4.00 wing with a taper ratio of zero and an unswept 0.80 chord line was selected as having the desired overall characteristics. The wing had an NACA 65A004 airfoil section parallel to the plane of symmetry. Longitudinal aerodynamic characteristics for the model were obtained with the wing clipped to form aspect ratios varying from 4.0 to 3.0. The aspect-ratio-3.50 clipped wing was tested in conjunction with several tail configurations, and some limited tail-on tests were made with the wing clipped to an aspect ratio of 3.00.

SYMBOLS

The data are presented about the system of axes shown in figure 1. The pitching-moment coefficients are referred to a center-of-gravity position which is located at the quarter-chord point of the aspect-ratio-3.50 clipped wing.

C_L	lift coefficient, $\frac{\text{Lift}}{qS}$
C_D	drag coefficient, $\frac{\text{Drag}}{qS}$
ΔC_D	change in drag due to lift
C_N	normal-force coefficient, $\frac{\text{Normal force}}{qS}$
C_A	axial-force coefficient, $\frac{\text{Axial force}}{qS}$
C_m	pitching-moment coefficient, $\frac{\text{Pitching moment}}{qS\bar{c}}$
q	dynamic pressure, $\frac{\rho V^2}{2}$, lb/sq ft

ρ	mass density of air, slugs/cu ft
V	free-stream velocity, ft/sec
M	Mach number
S	wing area, sq ft
c	local chord parallel to plane of symmetry, ft
c_r	root chord, ft
c_t	tip chord, ft
\bar{c}	wing mean aerodynamic chord, $\frac{2}{S} \int_0^{b/2} c^2 dy$, ft
\bar{c}_h	horizontal-tail mean aerodynamic chord, ft
\bar{c}_v	vertical-tail mean aerodynamic chord, ft
b	wing span, ft
y	spanwise distance from plane of symmetry, ft
Δx	change in mean aerodynamic quarter-chord location due to clipping of wing, in.
α	angle of attack, deg
i_t	stabilizer deflection, positive when trailing edge is down, deg
A	aspect ratio
λ	taper ratio
$\Lambda_{0.8c}$	sweep of 0.80 chord line, deg

MODEL AND APPARATUS

A three-view drawing of the complete model is shown in figure 2(a). The model with the basic pointed wing (taper ratio of zero) had an aspect ratio of 4.00 with an unswept 80-percent chord line. The basic wing was

also modified to form wings with aspect ratios of 3.50, 3.25, and 3.00 by clipping the wing tips (fig. 2(b)).

The model was fitted with an unswept-trailing-edge vertical tail ($\Lambda_c/4 = 28.0^\circ$) and with a delta horizontal tail which could be mounted in two positions. (See figs. 2(a) and 2(c).) The horizontal tail could be mounted on the rear end of the fuselage in the wing chord plane extended and also on the tip of the vertical tail in a T-tail arrangement. The apex of the horizontal tail (basic T-tail arrangement) overhung the leading edge of the vertical-tail tip by 1.93 inches. The various tail configurations of the basic model are shown in figure 2(c).

In addition to the tail configurations of the basic model, the model was modified to give zero overhang of the horizontal tail (T-tail) and also to keep the original tail length for this configuration (fig. 2(d)). In order to keep the same horizontal-tail length, a reduced-sweep vertical tail was constructed for the zero overhang configuration (tail configuration 7).

The incidence of the horizontal tail of the T-tail configuration could be varied by use of several mounting brackets. The incidence of the chord-plane horizontal tail was fixed at 0° . Dimensions of the fuselage with a fineness ratio of 10.94 are presented in table I. A photograph of the model mounted on the sting support of the Langley high-speed 7- by 10-foot tunnel is shown in figure 2(e).

TESTS

The sting-supported model was tested in the Langley high-speed 7- by 10-foot tunnel through a Mach number range of 0.60 to 0.92 and through an angle-of-attack range that varied with loading conditions (the maximum range being about -3° to 24°). The Reynolds number based on the mean aerodynamic chord varied with Mach number from about 2.6×10^6 to 3.4×10^6 .

Longitudinal stability tests were made for the model with the basic wing with an aspect ratio of 4.00 and with the basic wing clipped to give aspect ratios of 3.50, 3.25, and 3.00. The aspect-ratio-3.50 wing was selected for more detailed investigation of a complete model with various tail configurations. Some stabilizer effectiveness tests (for values of i_t of 0° to approximately 6°), were made with this wing. A few tail-on tests also were made with the aspect-ratio-3.00 wing.

CORRECTIONS

Blockage corrections were applied to the results by the method of reference 5. Jet-boundary corrections to the angle of attack and drag were applied in accordance with reference 6. Corrections for effects of the longitudinal pressure gradient in the wind-tunnel test section have been applied to the data.

Model support tares have not been applied, except for a fuselage base-pressure correction to the drag. The corrected drag data represent a condition of free-stream static pressure at the fuselage base. From past experience, it is expected that the influence of the sting support on the model characteristics is negligible with regard to the lift and pitching moment.

The angle of attack has been corrected for deflection of the balance and sting support. No attempt has been made to correct the data for aeroelastic distortion of the steel wing model.

PRESENTATION OF RESULTS

The results are presented in figures 3 to 15 as follows:

	Figure
Effect of aspect ratio on the longitudinal aerodynamic characteristics, tail-off	3
Effect of various tail configurations on the longitudinal aerodynamic characteristics of the aspect-ratio-3.50 model	4 and 5
Effect of aspect ratio on the longitudinal aerodynamic characteristics of the tail-on model	6
Effect of stabilizer deflection on the aerodynamic characteristics of the complete model (aspect-ratio-3.50 wing) with various tail configurations	7 to 10
Summary of aerodynamic characteristics	11 to 15
Tabulated results of normal-force and axial-force coefficient are presented in tables II to IX. The results are presented about a center of gravity located at the quarter-chord point of the aspect-ratio-3.50 wing.	

DISCUSSION

Pitching-Moment Characteristics

The effect on pitching-moment characteristics of reducing aspect ratio by clipping the tips of the basic aspect-ratio-4.00 pointed wing is shown in figure 3. The results show that clipping small portions off the wing tips (that is, reducing the aspect ratio) generally reduces the

longitudinal stability in the low lift-coefficient range, the effects becoming more significant as the aspect ratio becomes relatively smaller. (See figs. 3(a), 3(b), and 11.) These data also show that small localized nonlinearities occurring at moderate and high lift coefficients at high subsonic (above critical) Mach numbers are minimized by small reductions in aspect ratio. These data in general show results similar to those of the small-scale models of reference 1. After clipping the aspect-ratio-4.00 wing to an aspect ratio of 3.50, the aspect-ratio-3.50 wing was selected for the complete-model tests of the present program. Consequently, before the wing tips were cut off to form the aspect-ratio-3.25 and aspect-ratio-3.00 wings, the aspect-ratio-3.50 wing was tested rather extensively on a complete-model configuration with several different tail arrangements, inasmuch as the wing tips could not be accurately replaced. The complete-model characteristics with this wing are discussed in the following paragraphs.

Results of tests of the aspect-ratio-3.50 wing on a complete model with a vertical-tail and several horizontal-tail locations are shown in figure 4. These results show that the local nonlinearities previously mentioned for the wing-fuselage configurations are still evident with the complete model but that the horizontal tail generally tends to reduce their magnitudes. Note that the T-tail arrangement provides considerably more stability up to moderate lift coefficients than does the chord-plane horizontal tail (figs. 4(a) and 12) probably because of smaller changes in downwash with angle of attack (ref. 7) at the high tail (T-tail) and the greater exposed area of the high tail. It should also be noted that a combination of the T-tail and the chord-plane tail (biplane tail, configuration 5) has almost linear pitching-moment characteristics up to stall except for some local nonlinearities at $M = 0.92$.

In order to give a more direct comparison of the effects of the various horizontal tails on the longitudinal stability of the complete model, the T-tail, the chord-plane tail, and the biplane tail data have been reduced to a static margin of $-0.10\bar{c}$ at $M = 0.60$ (fig. 13) and adjusted to give $C_m = 0$ at $C_L = 0$. These results show that the biplane tail model has the best overall stability characteristics of any of the tail configurations tested in regard to pitching-moment linearity over the Mach number range investigated. This configuration shows increased stability at the stall. Similarly, no pitch-up is noted for the low-tail (chord-plane) configuration although the increase in stability at the higher lift coefficients (fig. 13) is somewhat greater than might be desired. The T-tail arrangement, on the other hand, shows a mild reduction in stability at moderate lift coefficients along with a strong pitch-up tendency above $C_{L_{max}}$. This configuration, however, may provide a warning of the impending pitch-up in the form of a momentary increase in stability at stall and perhaps buffeting associated with the wing stall.

It is believed that any of the present tail arrangements would prove acceptable when used in conjunction with the wing of this investigation. Note that changes in static margin with Mach number are very small for any of the tail-on configurations for the Mach number range investigated. (See figs. 12 and 13.)

For the T-tail configuration with horizontal-tail apex overhang (tail configuration 4 of the present paper), reference 8 shows a considerable reduction in directional stability at high subsonic Mach numbers; whereas, essentially no reduction is indicated when the horizontal tail has zero overhang. For this reason it is desirable to have the horizontal tail located in the rear position (tail configuration 6). With these results in mind, tests were made with the horizontal tail in the rear position to determine whether there were any large or adverse effects on the longitudinal-stability characteristics. Also, another configuration having a reduced-sweep vertical tail (tail configuration 7) made it possible to maintain the original horizontal-tail length and at the same time avoid the unfavorable directional interference. The effects of these tail modifications on longitudinal stability were small. (See fig. 5.)

The basic wing was modified to an aspect ratio of 3.00 by clipping the tips to form a more practical tip chord. This modification was also expected to provide somewhat greater stability for the T-tail arrangement just prior to stall. The results of figure 6, however, show this modification to be rather ineffective for the T-tail arrangement.

Lift and Drag Characteristics

Small reductions in aspect ratio produced by clipping off the tips of the basic pointed wing did not appreciably affect the lift characteristics of the wing-fuselage configuration. (See fig. 3(c).) Because of unexplained scatter in the minimum drag, the present data are not considered suitable for analysis of lift-drag ratios. Drag due to lift results obtained from these data, however, should be indicative of aspect-ratio effects through the lift-coefficient range. Such results (fig. 14) show that clipping the wing tips increases slightly the drag due to lift at the higher Mach numbers. These data (fig. 3(d)) also indicate that the drag rise is not reached in the Mach number range of the present investigation.

The effect of small changes in horizontal-tail leading-edge overhang and tail length (fig. 5) had no appreciable effect on the lift characteristics, although small increases in drag due to lift were noted at the higher Mach numbers. Also, changes in aspect ratio for the tail-on configuration had small or negligible effect on the lift and drag characteristics. (See figs. 6(b) and 6(c).)

Stabilizer Characteristics

The usual variation of the aerodynamic characteristics with stabilizer deflection was obtained for the complete model with the various tail configurations. (See figs. 7 to 10.) These data show that pitching-moment linearity and pitch-up characteristics were not appreciably affected by stabilizer deflection. The stabilizer effectiveness for the various tail configurations is shown in figure 15.

CONCLUDING REMARKS

An investigation of longitudinal stability at high subsonic speeds (Mach numbers of 0.6 to 0.92) of a highly tapered model having several tail configurations indicates the following results:


In general, the data indicate that reasonably good longitudinal stability characteristics can be obtained with a highly tapered wing having zero sweep of the 80-percent chord line when used in conjunction with a low tail, a high tail, or a biplane tail. The data show that the model with a biplane horizontal tail (T-tail plus chord-plane tail) gave the best overall longitudinal stability characteristics in regard to pitching-moment linearity against lift for the Mach number range investigated. Changes in static margin at zero lift coefficient with Mach number for these tails are small for the Mach number range investigated.

Langley Aeronautical Laboratory,
National Advisory Committee for Aeronautics,
Langley Field, Va., September 14, 1956.

REFERENCES

1. Few, Albert G., Jr., and Fournier, Paul G.: Effects of Sweep and Thickness on the Static Longitudinal Aerodynamic Characteristics of a Series of Thin, Low-Aspect-Ratio, Highly Tapered Wings at Transonic Speeds - Transonic-Bump Method. NACA RM L54B25, 1954.
2. Goodson, Kenneth W., and Becht, Robert E.: Wind-Tunnel Investigation at High Subsonic Speeds of the Stability Characteristics of a Complete Model Having Sweptback-, M-, W-, and Cranked-Wing Plan Forms and Several Horizontal-Tail Locations. NACA RM L54C29, 1954.
3. Few, Albert G., Jr., and King, Thomas J., Jr.: Some Effects of Tail Height and Wing Plan Form on the Static Longitudinal Stability Characteristics of a Small-Scale Model at High Subsonic Speeds. NACA RM L54G12, 1954.
4. Goodson, Kenneth W., and Becht, Robert E.: Wind-Tunnel Investigation at High Subsonic Speeds of the Static Longitudinal Stability Characteristics of a Complete Model Having Cropped-Delta, Swept, and Unswept Wings and Several Horizontal-Tail Heights. NACA RM L54H12, 1954.
5. Herriot, John G.: Blockage Corrections for Three-Dimensional-Flow Closed-Throat Wind Tunnels, With Consideration of the Effect of Compressibility. NACA Rep. 995, 1950. (Supersedes NACA RM A7B28.)
6. Gillis, Clarence L., Polhamus, Edward C., and Gray, Joseph L., Jr.: Charts for Determining Jet-Boundary Corrections for Complete Models in 7- by 10-Foot Closed Rectangular Wind Tunnels. NACA WR L-123, 1945. (Formerly NACA ARR L5G31.)
7. Few, Albert G., Jr.: Some Effects of Sweep and Thickness on the Experimental Downwash Characteristics at Transonic Speeds of a Series of Highly Tapered Wings With an Aspect Ratio of 3 - Transonic-Bump Method. NACA RM L55J12, 1956.
8. Polhamus, Edward C., and Hallissy, Joseph M., Jr.: Effect of Airplane Configuration on Static Stability at Subsonic and Transonic Speeds. NACA RM L56A09a, 1956.

TABLE I.- FUSELAGE ORDINATES

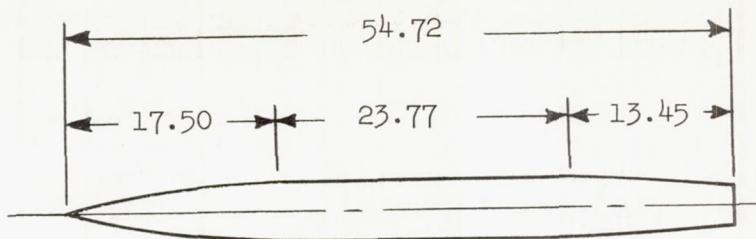

Station, in.	Radius, in.
0	0
2.00	.53
4.00	1.00
6.00	1.44
8.00	1.80
10.00	2.07
12.00	2.30
14.00	2.42
16.00	2.47
17.50	2.50
41.27	2.50
43.27	2.42
45.27	2.35
47.27	2.25
48.30	2.14
54.72	1.65

TABLE II.—NORMAL- AND AXIAL-FORCE COEFFICIENTS (FIG 3)

TABLE III.— NORMAL- AND AXIAL-FORCE COEFFICIENTS (FIG 4)

Tail Configuration	<i>i_t</i> deg	M = .60			M = .80			M = .85			M = .90			M = .92			
		<i>a</i> ^o	<i>C_N</i>	<i>C_A</i>													
1	—	-3.16	-2013	.0084	-3.26	-2292	.0081	-3.29	-2472	.0081	-3.32	.0084	-2673	-3.34	-2850	.0099	
		-2.13	-1391	.0097	-2.16	-1471	.0087	-2.18	-1566	.0100	-2.20	.0101	-1639	-2.22	-1907	.0111	
		-1.06	-0711	.0108	-1.10	-0804	.0106	-1.12	-0802	.0111	-1.11	.0117	-0837	-1.12	-0964	.0127	
		.00	-0059	.0111	.00	-0021	.0077	.00	-0001	.0110	.00	.0118	-0033	.00	-0033	.0122	
		1.04	.0566	.0110	1.08	.0724	.0096	1.10	.0782	.0112	1.10	.0116	.0787	1.12	.0993	.0126	
		2.11	.1273	.0098	2.16	.1430	.0082	2.19	.1601	.0094	2.22	.0101	.1836	2.23	.2031	.0119	
		3.16	.1897	.0077	3.26	.2288	.0072	3.28	.3182	.0056	3.43	.0065	.3716	4.45	.2905	.0075	
		4.21	.2604	.0060	4.33	.2977	.0058	4.37	.4533	.0040	4.60	.0042	.5042	6.63	.5614	.0054	
		6.33	.3939	.0044	6.49	.4373	.0035	6.53	.5299	.0041	7.68	.0047	.5757	7.75	.6745	.0050	
		8.42	.4990	.0029	8.61	.5442	.0044	8.68	.5866	.0039	8.77	.0051	.6667	8.79	.6959	.0044	
		10.50	.6094	.0024	10.73	.6677	.0052	10.79	.6840	.0025	10.87	.0056	.7582	10.89	.7832	.0002	
		12.57	.6943	.0035	12.81	.7514	.0063	12.87	.7689	.0063	12.99	.0055	.8664	12.99	.8959	.0002	
		14.62	.7810	.0052	14.87	.8155	.0074	14.93	.8426	.0082	15.00	.0088	.8953	15.00	.9250	.0002	
		16.63	.8061	.0082	16.79	.7582	.0130	15.64	.2503	.0103	15.68	.0229	15.72	.0188	.0124	.0124	
		18.60	.7637	.0111	17.61	.3340	.0104	17.72	.1882	.0107	17.72	.0152	17.72	.0105	.0111	.0111	
		19.31	-8500	.0081	19.69	-2525	.0091	18.76	-1529	.0105	18.76	-	18.76	-	18.76	-	
		21.37	-7634	.0071	21.81	-1352	.0071	22.84	-0800	.0058	22.84	-	22.84	-	22.84	-	
		22.42	-7018	.0060	22.84	-	-	22.84	-	-	22.84	-	22.84	-	22.84	-	
2	—	-3.18	-2120	.0081	-3.27	-2392	.0081	-3.30	-2515	.0112	-3.32	.0100	-2678	-3.35	-3002	.0111	
		-2.12	-1412	.0095	-2.18	-1615	.0112	-2.19	-1612	.0111	-2.20	.0118	-1747	-2.22	-1868	.0125	
		-1.06	-0737	.0126	-1.10	-0856	.0122	-1.10	-0815	.0118	-1.11	.0132	-0898	-1.11	-0975	.0136	
		-.01	-0142	.0118	-.01	-0113	.0127	-.01	-0087	.0127	-.01	.0132	-0098	-.01	-0080	.0137	
		1.04	.0481	.0125	1.06	.0552	.0124	1.08	.0606	.0126	1.11	.0131	.0753	1.11	.0817	.0134	
		2.09	.1158	.0100	2.15	.1331	.0111	2.19	.1509	.0112	2.21	.0117	.1750	2.22	.1791	.0124	
		3.15	.1835	.0084	3.24	.2242	.0096	3.28	.2376	.0092	3.34	.0102	.2909	3.34	.2921	.0111	
		4.22	.2599	.0070	4.35	.3134	.0083	4.39	.3280	.0076	4.46	.0088	.3823	4.48	.4136	.0105	
		6.33	.3900	.0067	6.50	.4373	.0075	6.56	.4770	.0069	6.62	.0074	.5242	6.68	.5919	.0088	
		8.43	.5006	.0055	8.62	.5531	.0073	8.71	.6027	.0070	8.78	.0089	.6651	8.86	.7695	.0097	
		10.51	.6078	.0061	10.74	.6667	.0084	10.83	.7138	.0090	10.92	.0121	.7973	10.92	.8667	.0096	
		12.59	.7203	.0079	12.83	.7594	.0099	12.90	.7967	.0097	12.90	.0111	13.02	.0115	.8888	.0086	
		14.64	.7987	.0104	14.89	.8308	.0122	14.94	.8543	.0136	14.94	.0136	15.00	.0158	15.00	.0158	
		16.66	.8291	.0126	16.84	.7869	.0163	16.92	.8313	.0168	16.72	.0161	16.80	.0140	16.80	.0140	
		18.63	.7758	.0154	17.64	-2925	.0131	17.76	-1608	.0134	17.76	-	17.76	-	17.76	-	
		20.68	.8491	.0147	19.74	-2095	.0117	21.85	-0971	.0113	22.89	-0503	.0109	22.89	-	22.89	-
		21.37	-7714	.0113	21.85	-	-	22.89	-	-	22.89	-	22.89	-	22.89	-	
		22.42	-6903	.0104	22.89	-	-	22.89	-	-	22.89	-	22.89	-	22.89	-	
3	O	-3.16	-2020	.0095	-3.26	-2270	.0090	-3.28	-2380	.0091	-3.31	.0092	-2586	-3.32	-2749	.0107	
		-2.11	-1263	.0111	-2.16	-1421	.0107	-2.18	-1571	.0124	-2.20	.0113	-1660	-2.24	-1864	.0120	
		-1.05	-0592	.0122	-1.09	-0744	.0122	-1.11	-0781	.0124	-1.12	.0126	-0817	-1.13	-0976	.0136	
		-.00	-0003	.0121	-.01	.0014	.0122	-.01	.0013	.0126	-.00	.0130	.0061	-.01	-0006	.0133	
		1.05	.0699	.0124	1.08	.0753	.0122	1.09	.0790	.0124	1.10	.0127	.0824	1.09	.0886	.0133	
		2.11	.1399	.0117	2.16	.1507	.0114	2.18	.1616	.0114	2.21	.0115	.1865	2.21	.1919	.0121	
		3.15	.2014	.0098	3.23	.2243	.0094	3.27	.2407	.0092	3.29	.0091	.2609	3.32	.2899	.0112	
		4.23	.2881	.0077	4.32	.3111	.0077	4.36	.3234	.0072	4.41	.0070	.3551	4.44	.3946	.0087	
		6.31	.4114	.0057	6.47	.4489	.0054	6.52	.4745	.0046	6.59	.0049	.5170	6.63	.5800	.0061	
		8.42	.5315	.0036	8.58	.5656	.0043	8.65	.6024	.0044	8.75	.0053	.6763	8.72	.6365	.0054	
		10.50	.6406	.0027	10.68	.6744	.0051	9.72	.6571	.0043	9.79	.0050	.7175	9.85	.8039	.0039	
		12.56	.7491	.0036	12.77	.7813	.0050	10.76	.7108	.0048	10.89	.0049	.8238	10.92	.8762	.0030	
		14.61	.8374	.0053	14.83	.8664	.0058	12.86	.8240	.0050	12.97	.0042	.9026	12.97	.9629	.0001	
		16.62	.8861	.0072	16.76	.8583	.0096	15.86	.9002	.0078	15.99	.0059	.9158	16.02	.9726	.0001	
		18.56	.8614	.0090	17.55	-2084	.0034	16.63	-1070	.0035	17.63	.0089	.0029	17.63	-	17.63	-
		19.26	.7296	.0026	19.62	-1104	.0001	11.82	-7702	.0051	11.93	.0048	.8649	-	-	-	-
		21.34	.6167	.0003	21.71	-0050	.0030	13.86	-8497	.0055	14.02	.0043	.9629	-	-	-	-
		22.36	-5728	.0014	22.76	0.0691	.0049	22.89	-	-	22.89	-	22.89	-	22.89	-	

TABLE III.— CONCLUDED

Tail Configuration	i_t deg	$M = .60$			$M = .80$			$M = .85$			$M = .90$			$M = .92$			
		α°	C_N	C_A	α°	C_N	C_A										
4	-0.7	-3.15	-0.2351	.0091	-3.22	-0.2569	.0098	-3.25	-0.2728	.0098	-3.27	.0118	-0.3052	-3.30	-0.3323	.0133	
		-2.09	-0.1537	.0119	-2.14	-0.1717	.0116	-2.16	-0.1759	.0115	-2.17	.0139	-0.2009	-2.18	-0.2093	.0159	
		-1.05	-0.0836	.0126	-1.07	-0.0865	.0130	-1.08	-0.0895	.0133	-1.07	.0144	-0.1065	-1.10	-0.1165	.0173	
		.00	-0.0134	.0133	.00	-0.0089	.0129	.00	-0.0101	.0131	.01	.0142	-0.0152	.01	-0.0105	.0153	
		1.05	.0624	.0138	1.08	.0726	.0129	1.08	.0764	.0131	1.09	.0139	.0726	1.12	.0821	.0145	
		2.11	.1411	.0125	2.15	.1518	.0112	2.16	.1680	.0114	2.19	.0120	.1752	2.21	.1874	.0130	
		3.15	.2114	.0097	3.22	.2371	.0094	3.25	.2543	.0090	3.31	.0100	.2778	3.31	.2921	.0112	
		4.21	.2957	.0081	4.30	.3149	.0080	4.35	.3445	.0069	4.40	.0078	.3790	4.42	.4022	.0090	
		6.30	.4281	.0059	6.44	.4648	.0054	6.49	.4913	.0046	6.56	.0048	.5448	5.51	.5182	.0080	
		8.40	.5494	.0032	8.56	.5882	.0045	8.64	.6448	.0043	8.69	.0055	.6389	6.62	.6311	.0069	
		10.47	.6590	.0028	10.66	.7037	.0044	10.73	.7418	.0046	10.82	.0054	.8373	7.69	.6962	.0058	
		12.54	.7713	.0034	12.75	.8058	.0052	12.81	.8389	.0052	11.76	.0054	.7545				
		14.57	.8411	.0055	14.79	.8774	.0060	14.88	.8828	.0055	13.85	.0060					
		16.60	.8883	.0074	16.74	.8478	.0105	16.82	.9072	.0085	15.81	.0085					
		18.56	.8426	.0098	17.54	-0.2560	.0053	16.59	.8990	.0102	16.01	.0056					
5	{-0.7 0}	20.63	.9174	.0088	19.65	-0.1791	.0040	17.66	-0.1069	.0051	18.68	-0.0890					
		21.35	-0.7123	.0051	21.77	-0.1013	.0033										
		22.38	-0.6971	.0050	22.85	-0.0527	.0032										
		-3.15	-0.2280	.0093	-3.22	-0.2506	.0100	-3.23	-0.2628	.0105	-3.26	.0131	-0.2861	-3.28	-0.3069	.0141	
		-2.10	-0.1501	.0113	-2.14	-0.1589	.0117	-2.15	-0.1704	.0118	-2.17	.0148	-0.1911	-2.18	-0.1950	.0168	
		-1.04	-0.0723	.0129	-1.08	-0.0823	.0130	-1.08	-0.0868	.0136	-1.07	.0154	-0.0909	-1.08	-0.0958	.0172	
		.00	-0.0055	.0128	.00	.0039	.0133	.01	.0006	.0137	.01	.0154	-0.0073	.02	-0.0010	.0162	
		1.04	.0697	.0131	1.09	.0827	.0135	1.09	.0792	.0137	1.11	.0148	.0830	1.10	.0888	.0160	
		2.10	.1390	.0120	2.15	.1669	.0121	2.17	.1751	.0123	2.20	.0133	.1947	2.20	.1923	.0142	
		3.14	.2225	.0101	3.22	.2435	.0100	3.25	.2571	.0355	3.30	.0107	.2877	3.31	.3046	.0120	
		4.20	.3058	.0079	4.31	.3337	.0081	4.33	.3408	.0077	4.39	.0083	.3860	4.40	.4010	.0104	
		5.24	.3754	.0064					.5442	.4280	.0060	5.47	.0067	.4649	5.51	.5021	.0082
		6.30	.4506	.0052	6.43	.4779	.0060	6.49	.5065	.0053	6.55	.0053	.5500	6.60	.6090	.0071	
		8.37	.5702	.0026	8.54	.5975	.0045	8.61	.6544	.0041	8.70	.0050	.7185	8.75	.7771	.0052	
		10.46	.6923	.0016	10.65	.7392	.0038	10.72	.7730	.0042	10.80	.0054	.8363	9.83	.8727	.0045	
		12.52	.7951	.0016	12.72	.8383	.0039	11.75	.8249	.0041	11.88	.0049	.9261				
		14.56	.9001	.0030	14.77	.9345	.0046	12.79	.8715	.0041	12.91	.0043	.9586				
		16.57	.9347	.0045	16.69	.9215	.0074	14.82	.9489	.0049	13.92	.0040	.9829				
		18.52	.9261	.0068	17.46	-0.1493	.0005	15.79	.9556	.0065							
		20.58	1.0099	.0050	19.54	-0.0744	-0.0021	16.53	-0.0948	.0016							
		21.30	-0.5801	-0.0016				17.55	-0.0264	-0.0003							
		22.33	-0.5435	-0.0022													

TABLE IV.—NORMAL-AND AXIAL-FORCE COEFFICIENTS (FIG 5)

Tail Configuration	i_t deg	M=.60			M=.80			M=.85			M=.90			M=.92		
		α°	C_N	C_A	α°	C_N	C_A	α°	C_N	C_A	α°	C_N	C_A	α°	C_N	C_A
4	-0.7	-3.15	-2351	.0093	-3.22	-2569	.0098	-3.25	-2728	.0098	-3.27	.0118	-3.30	-3.323	.0133	
		-2.09	-1537	.0113	-2.14	-1717	.0115	-2.16	-1759	.0115	-2.17	.0139	-2.18	-2093	.0159	
		-1.05	-0836	.0126	-1.07	-0865	.0130	-1.08	-0895	.0131	-1.09	.0144	-1.10	-1165	.0173	
		-0.00	-0134	.0133	0.00	-0089	.0129	0.00	-0101	.0131	0.01	.0142	-0152	*01	-0105	*0153
		1.05	-0624	.0138	1.08	-0726	.0129	1.08	-0764	.0131	1.09	.0139	-0726	1.12	-1874	*0130
		2.11	-1411	.0125	2.15	-1518	.0112	2.16	-1680	.0114	2.19	.0120	-1752	2.21	-1874	*0145
		3.15	-2114	.0097	3.22	-2371	.0094	3.25	-2543	.0090	3.31	.0100	-2778	3.31	-2921	.0112
		4.21	-2957	.0081	4.30	-3149	.0080	4.35	-3445	.0069	4.40	.0078	-3790	4.42	-4022	*0090
		6.30	-4281	.0059	6.44	-4648	.0054	6.49	-4154	.0054	6.48	.0062	-4616	5.51	-5182	*0080
		8.40	-5494	.0032	8.56	-5882	.0045	8.64	-6448	.0043	8.65	.0048	-5448	6.62	-6311	*0069
		10.47	-6590	.0028	10.66	-7037	.0044	10.73	-7418	.0046	10.75	.0054	-7545	8.76	-7775	*0049
		12.54	-7713	.0034	12.75	-8058	.0052	12.81	-8389	.0052	12.92	.0051	-9291			
		14.57	-8411	.0055	14.79	-8774	.0060	14.88	-9266	.0060	14.97	.0062	-975			
		16.60	-8883	.0074	16.74	-8478	.0105	15.81	-9072	.0085	16.82	.0102	-8373			
		18.56	-8426	.0098	17.54	-2560	.0053	16.59	-1601	.0056	17.66	-1069	.0051	-2907		
		20.63	-9174	.0088	19.65	-1791	.0040	18.66	-0890	.0042						
		21.35	-7123	.0051	21.77	-1013	.0033									
		22.38	-6971	.0050	22.85	-0527	.0032									
6	-0.7	-3.15	-2504	.0095	-3.22	-2787	.0106	-3.24	-2912	.0104	-3.28	.0116	-3.31	-3.359	.0131	
		-2.11	-1780	.0114	-2.16	-1925	.0120	-2.16	-2003	.0122	-2.18	.0129	-2.19	-2425	.0145	
		-1.05	-0994	.0132	-1.08	-1062	.0134	-1.08	-1093	.0138	-1.08	.0144	-1.11	-1.08	-1209	.0152
		-0.02	-0272	.0129	-0.01	-0273	.0135	0.01	-0288	.0139	0.01	.0147	-0236	*00	-0246	*0152
		1.04	-0481	.0124	1.07	-0517	.0129	1.11	-0587	.0134	1.08	.0143	-0622	1.10	-0737	*0145
		2.08	-1178	.0117	2.14	-1323	.0123	2.16	-1413	.0126	2.17	.0133	-1560	2.21	-1846	*0140
		3.14	-1903	.0100	3.21	-2208	.0104	3.25	-2341	.0105	3.27	.0115	-2614	3.31	-2907	*0126
		4.18	-2686	.0083	4.29	-3053	.0088	4.34	-3290	.0084	4.28	.0100	-3685	4.41	-4064	*0114
		6.28	-4142	.0061	6.44	-4747	.0061	6.50	-5029	.0059	6.56	.0080	-4593	5.51	-5204	*0108
		8.39	-5458	.0042	8.56	-5970	.0059	8.62	-6327	.0067	8.78	.0091	-6124	7.59	-6930	*0091
		10.46	-6495	.0040	10.65	-7061	.0073	10.72	-7414	.0076	10.80	.0100	-8132		-7804	*0092
		12.53	-7501	.0052	12.74	-7982	.0082	11.78	-7941	.0080	11.84	.0103	-8593			
		14.58	-8393	.0080	14.79	-8784	.0100	14.84	-8780	.0102						
		16.59	-8751	.0110	16.73	-8397	.0147	15.81	-8824	.0137						
		18.59	-8406	.0137	18.80	-8936	.0147	16.81	-8907	.0157						
		20.63	-9020	.0138	20.91	-9561	.0154	17.84	-9227	.0161						
		22.72	-9722	.0146				18.88	-9357	.0161						
7	-0.7	*.00	-0133	.0133	*.00	-0179	.0136	*.02	-0111	.0147	-2.24	*0120	-3028	-2.64	*4448	*0171
		2.10	-1347	.0119	2.16	-1572	.0118	2.18	-1678	.0126	-2.16	.0139	-1994	-2.15	-2075	*0170
		4.21	-2940	.0089	4.32	-3324	.0088	4.37	-3556	.0089	4.40	.0156	-0118	*03	*0177	*0170
		6.31	-4286	.0069	6.47	-4815	.0076	6.52	-5102	.0080	6.58	.0097	-3758	4.45	-4279	*0117
		8.40	-5462	.0051	8.56	-5982	.0072	8.63	-6296	.0089	8.71	.0105	-6983	8.73	-7260	*0119
		10.46	-6582	.0047	10.67	-7262	.0077	10.73	-7466	.0095	10.82	.0118	-8171	11.01	-9691	*0119
		12.53	-7586	.0065	12.75	-8108	.0090	12.82	-8517	.0108	12.88	.0125	-8995			
		14.58	-8533	.0089	14.80	-8911	.0107	14.88	-9266	.0128	14.97	.0146	-9899			
		16.59	-8748	.0116	16.74	-8524	.0149	16.83	-9116	.0169						
		18.56	-8519	.0146	18.81	-9137	.0152	18.91	-9826	.0179						
		20.63	-9070	.0134	20.91	0.9813	.0153	21.02	1.0421	.0186						
		22.72	0.9908	.0130	23.04	1.0406	.0161									

TABLE IV.—NORMAL- AND AXIAL-FORCE COEFFICIENTS (FIG 6)

Aspect ratio	i_f deg	$M = .60$			$M = .80$			$M = .85$			$M = .90$			$M = .92$		
		α°	C_N	C_A	α°	C_N	C_A	α°	C_N	C_A	α°	C_N	C_A	α°	C_N	C_A
3.50	-0.7	-3.15	-0.2504	.0095	-3.22	-0.2787	.0106	-3.24	-0.2912	.0104	-3.28	.0116	-0.3311	-3.28	-0.3359	.0131
		-2.11	-0.1780	.0114	-2.16	-0.1925	.0120	-2.16	-0.2003	.0122	-2.18	.0129	-0.2209	-2.19	-0.2315	.0145
		-1.05	-0.0994	.0132	-1.08	-0.1062	.0134	-1.08	-0.1093	.0138	-1.08	.0146	-0.1141	-1.08	-0.1209	.0152
		-.02	-0.0272	.0129	-.01	-0.0273	.0135	-.01	-0.0288	.0139	-.01	.0147	-0.0236	-.00	-0.0246	.0152
		1.04	.0481	.0124	1.07	.0517	.0129	1.11	.0587	.0134	1.08	.0143	.0622	1.10	.0737	.0145
		2.08	.1178	.0117	2.14	.1323	.0123	2.16	.1413	.0126	2.17	.0133	.1560	2.21	.1846	.0140
		3.14	.1903	.0100	3.21	.2208	.0104	3.25	.2341	.0105	3.27	.0115	.2614	3.31	.2907	.0126
		4.18	.2686	.0083	4.29	.3053	.0088	4.34	.3290	.0084	4.38	.0100	.3685	4.41	.4066	.0114
		6.28	.4142	.0061	6.44	.4747	.0061	5.42	.4168	.0068	5.48	.0086	.4593	5.51	.5204	.0108
		8.39	.5458	.0042	8.56	.5970	.0059	7.60	.5679	.0060	7.62	.0081	.6124	7.69	.6930	.0091
		10.46	.6495	.0040	10.65	.7061	.0073	9.68	.6975	.0071	9.74	.0094	.7634	8.73	.7804	.0092
		12.53	.7501	.0052	12.74	.7982	.0082	10.72	.7414	.0076	10.80	.0100	.8132			
		14.58	.8393	.0080	14.79	.8784	.0100	13.83	.7941	.0080	11.78	.0102	.8593			
		16.59	.8751	.0110	16.73	.8397	.0147	14.84	.8780	.0102	12.79	.0091	12.90	.0104	.9238	
		18.59	.8406	.0137	18.80	.8936	.0147	15.81	.8824	.0137	16.81	.0157				
		20.63	.9020	.0138	20.91	.9561	.0154	17.84	.9227	.0161						
		22.72	.9722	.0146												
		23.75	.9986	.0152												
3.00	-0.7	-3.12	-0.2071	.0094	-3.17	-0.2326	.0100	-3.20	-0.2405	.0100	-3.22	.0118	-0.2530	-3.22	-0.2719	.0128
		-2.07	-0.1376	.0120	-2.09	-0.1466	.0122	-2.11	-0.1497	.0125	-2.12	.0132	-0.1597	-2.12	-0.1640	.0146
		-1.03	-0.0653	.0131	-1.03	-0.0706	.0131	-1.04	-0.0715	.0135	-1.05	.0144	-0.0751	-1.05	-0.0813	.0154
		-.02	.0015	.0142	.04	.0018	.0140	.03	.0014	.0143	.04	.0154	.0064	.04	.0015	.0163
		1.07	.0682	.0142	1.11	.0759	.0139	1.11	.0833	.0145	1.12	.0149	.0862	1.13	.0928	.0145
		2.12	.1435	.0131	2.18	.1581	.0124	2.19	.1654	.0125	2.21	.0131	.1748	2.24	.1927	.0156
		3.17	.2220	.0113	3.26	.2480	.0109	3.29	.2602	.0103	3.31	.0113	.2700	3.34	.2840	.0125
		4.23	.3004	.0100	4.35	.3321	.0093	4.37	.3423	.0089	4.43	.0097	.3837	4.45	.3999	.0119
		6.34	.4428	.0076	6.48	.4849	.0083	6.53	.5063	.0073	5.52	.0095	.4770	5.56	.5126	.0122
		8.43	.5649	.0062	8.61	.6141	.0085	8.66	.6340	.0088	7.68	.0106	.6330	7.72	.6976	.0130
		10.52	.6956	.0061	10.71	.7315	.0094	10.75	.7466	.0107	10.85	.0134	.8211	10.96	.9463	.0150
		12.58	.7857	.0077	12.80	.8271	.0113	12.84	.8450	.0119	11.92	.0143	.8926	12.02	1.0046	.0158
		14.63	.8723	.0113	14.84	.8971	.0136	14.90	.9213	.0143	12.98	.0151	.9436			
		16.60	.8626	.0154	16.79	.8609	.0176	16.87	.9078	.0186	14.01	.0160	.9863			
		18.63	.8834	.0170	18.85	.9131	.0183	18.95	.9619	.0202						
		20.68	.9264	.0167	20.97	0.9822	.0195									
		22.78	1.0023	.0176	23.13	1.0544	.0199									

TABLE VI.—NORMAL-AND AXIAL-FORCE COEFFICIENTS (FIG 7)

Tail Configuration	i_t deg	M = .60			M = .80			M = .85			M = .90			M = .92		
		α°	C_N	C_A	α°	C_N	C_A	α°	C_N	C_A	α°	C_N	C_A	α°	C_N	C_A
4	-0.7	-3.15	-2.351	.0091	-3.22	-2.569	.0098	-3.25	-2.728	.0098	-3.27	.0118	-3.052	-3.30	-.3323	.0133
		-2.09	-1.537	.0119	-2.14	-1.717	.0116	-2.16	-1.759	.0115	-2.17	.0139	-2.009	-2.18	-.2093	.0159
		-1.05	-0.836	.0126	-1.07	-0.865	.0130	-1.08	-0.895	.0133	-1.07	.0144	-1.065	-1.10	-.1165	.0173
		.00	-0.134	.0133	.00	-0.089	.0129	.00	-0.101	.0131	.01	.0142	-0.152	.01	-.0105	.0153
		1.05	.0624	.0138	1.08	.0726	.0129	1.08	.0764	.0131	1.09	.0139	.0726	1.12	.0821	.0145
		2.11	.1411	.0125	2.15	.1518	.0112	2.16	.1680	.0114	2.19	.0120	.1752	2.21	.1874	.0130
		3.15	.2114	.0097	3.22	.2371	.0094	3.25	.2543	.0090	3.31	.0100	.2778	3.31	.2921	.0112
		4.21	.2957	.0081	4.30	.3149	.0080	4.35	.3445	.0069	4.40	.0078	.3790	4.42	.4022	.0090
		6.30	.4281	.0059	6.44	.4648	.0054	6.49	.4913	.0046	6.56	.0048	.5448	6.62	.6311	.0069
		8.40	.5494	.0032	8.56	.5882	.0045	8.64	.6448	.0043	8.69	.0054	.6885	8.76	.6962	.0058
		10.47	.6590	.0028	10.66	.7037	.0044	10.73	.7418	.0046	10.82	.0054	.8373			
		12.54	.7713	.0034	12.75	.8058	.0052	12.81	.8389	.0052	12.92	.0051	.8790			
		14.57	.8411	.0055	14.79	.8774	.0060	13.85	.8828	.0055						
		16.60	.8883	.0074	16.74	.8478	.0105	14.88	.9266	.0060						
		18.56	.8426	.0098	17.54	-2.2560	.0053	15.81	.9072	.0085						
		20.63	.9174	.0088	19.65	-1.791	.0040	16.82	.8990	.0102						
		21.35	-7.123	.0051	21.77	-1.013	.0033	16.59	-1.601	.0056						
		22.38	-6.971	.0050	22.85	-0.527	.0032	17.66	-1.069	.0051						
		18.68	-1.079	.0042	19.68	-1.791	.0040	18.68	-0.890	.0042						
4	-4.0	-3.09	-2.313	.0129	-3.13	-2.607	.0137	-3.15	-2.705	.0138	-3.18	.0160	-2.820	-3.19	-.3074	.0187
		-2.04	-1.619	.0145	-2.06	-1.765	.0149	-2.05	-1.778	.0147	-2.07	.0177	-1.835	-2.08	-.1891	.0186
		-1.00	-0.925	.0150	-0.98	-1.014	.0151	-0.98	-1.028	.0147	-0.98	.0177	-1.028	-0.98	-.0990	.0184
		.06	-0.231	.0146	.09	-0.229	.0152	.10	-0.208	.0148	.12	.0174	-0.110	.12	-.0059	.0178
		1.10	.0518	.0141	1.16	.0576	.0140	1.19	.0663	.013	1.22	.0163	.0762	1.23	.0936	.0171
		2.16	.1296	.0125	2.24	.1455	.0121	2.28	.1588	.0123	2.32	.0133	.1826	2.33	.1941	.0156
		3.20	.1990	.0109	3.32	.2296	.0106	3.36	.2460	.0100	3.41	.0114	.2759	3.43	.2983	.0133
		4.26	.2797	.0096	4.39	.3103	.0093	4.44	.3279	.0075	4.50	.0095	.3662	4.52	.3892	.0112
		6.35	.4075	.0067	6.52	.4508	.0061	6.59	.4797	.0053	6.67	.0062	.5380	6.70	.5966	.0087
		8.44	.5300	.0045	8.63	.5670	.0052	8.72	.5460	.0048	7.73	.0058	.6034	7.78	.6842	.0070
		10.52	.6413	.0027	10.74	.6885	.0048	10.82	.7289	.0045	10.87	.0061	.7780	9.95	.8679	.0043
		12.60	.7552	.0032	12.82	.7818	.0049	11.85	.7723	.0045	11.93	.0049	.8320			
		14.63	.8212	.0048	14.86	.8543	.0047	14.93	.8846	.0057						
		16.62	.8479	.0057	16.80	.8172	.0083	15.64	.8750	.0075						
		18.61	.8309	.0078	17.61	-2.2531	.0035	17.73	-1.192	.0034						
		19.31	-7.829	.0044	19.73	-1.7334	.0033	19.90	-1.894	.0041						
		21.40	-7.118	.0040	21.85	-0.836	.0028	22.92	-0.436	.0031						
4	-6.0	-3.10	-2.910	.0154	-3.14	-3.209	.0189	-3.16	-3.304	.0202	-3.20	.0226	-3.550	-3.21	-.3723	.0250
		-2.04	-2.185	.0178	-2.07	-2.363	.0197	-2.06	-2.339	.0216	-2.09	.0231	-2.479	-2.09	-.2502	.0251
		-1.00	-1.461	.0185	-0.98	-1.518	.0201	-0.98	-1.498	.0212	-0.99	.0239	-1.492	-0.99	-.1539	.0253
		.04	-0.760	.0180	.09	-0.748	.0198	.11	-0.708	.0204	.11	.0231	-0.700	.11	-.0620	.0242
		1.10	-0.065	.0170	1.16	.0022	.0189	1.19	.0064	.0196	1.20	.0224	.0161	1.21	.0237	.0230
		2.15	.0633	.0162	2.25	.0829	.0169	2.27	.0957	.0179	2.30	.0201	.1150	2.33	.1363	.0216
		3.21	.1441	.0133	3.33	.1768	.0147	3.38	.1922	.0149	3.43	.0174	.2301	3.44	.2643	.0196
		4.25	.2165	.0120	4.41	.2611	.0131	4.47	.2815	.0128	4.51	.0154	.3206	4.55	.3690	.0174
		6.36	.3699	.0095	6.55	.4134	.0112	6.63	.4461	.0101	6.71	.0133	.5098	6.73	.5459	.0151
		8.45	.4846	.0070	8.68	.5429	.0099	8.76	.5861	.0106	8.84	.0138	.6410	8.90	.7225	.0147
		10.53	.5988	.0062	10.77	.6551	.0101	10.86	.6978	.0112	10.95	.0148	.7804	11.03	.8583	.0138
		12.60	.7187	.0080	12.84	.7487	.0111	12.92	.7867	.0125	12.01	.0147	.8461			
		14.64	.7960	.0098	14.89	.8228	.0124	14.98	.8471	.0142						
		16.66	.8425	.0109	16.83	.7931	.0151	16.93	.8284	.0163						
		18.62	.8082	.0126	17.65	-2.2753	.0118	17.75	-1.1603	.0133						
		20.69	.8737	.0124	19.76	-1.897	.0119									
		21.40	-7.397	.0104	21.90	-1.037	.0130									
		22.46	-6.688	.0106	22.95	-0.655	.0136									

TABLE VII. — NORMAL-AND AXIAL-FORCE COEFFICIENTS (FIG 8)

Tail Configuration	i_t deg	M=.60			M=.80			M=.85			M=.90			M=.92		
		α°	C_N	C_A	α°	C_N	C_A	α°	C_N	C_A	α°	C_N	C_A	α°	C_N	C_A
6	-0.7	-3.15	-2504	.0095	-3.22	-2787	.0106	-3.24	-2912	.0104	-3.28	.0116	-3.311	-3.28	.0131	
		-2.11	-1780	.0114	-2.16	-1925	.0120	-2.16	-2003	.0122	-2.18	.0129	-2.209	-2.19	.0145	
		-1.05	-0994	.0132	-1.08	-1062	.0134	-1.08	-1093	.0138	-1.08	.0146	-1.141	-1.08	.0152	
		-0.02	-0272	.0129	-0.01	-0273	.0135	-0.01	-0288	.0139	-0.01	.0147	-0.0236	*.00	-0.0246	.0152
		1.04	.0481	.0124	1.07	.0517	.0129	1.11	.0587	.0134	1.08	.0143	.0622	1.10	.0737	.0145
		2.08	.1178	.0117	2.14	.1323	.0123	2.16	.1413	.0126	2.17	.0133	.1560	2.21	.1846	.0126
		3.14	.1903	.0100	3.21	.2208	.0104	3.25	.2341	.0105	3.27	.0115	.2614	3.31	.2979	.0126
		4.18	.2686	.0083	4.29	.3053	.0088	4.34	.3290	.0084	4.38	.0100	.3685	4.41	.4086	.0114
		6.28	.4142	.0061	6.44	.4747	.0061	6.52	.4168	.0068	6.48	.0086	.453	5.51	.5204	.0108
		8.39	.5458	.0042	8.56	.5970	.0059	8.62	.6327	.0067	8.58	.0091	.7634	8.73	.7804	.0092
		10.46	.6495	.0040	10.65	.7061	.0073	10.73	.7144	.0076	10.80	.0100	.8132			
		12.53	.7501	.0052	12.74	.7982	.0082	12.79	.8254	.0091	12.90	.0103	.8593			
		14.58	.8393	.0080	14.79	.8784	.0100	15.83	.8780	.0102						
		16.59	.8751	.0110	16.73	.8397	.0147	16.81	.8907	.0157						
		18.59	.8406	.0137	18.80	.8936	.0147	18.88	.9357	.0161						
		20.63	.9020	.0138	20.91	.9561	.0154									
		22.72	.9722	.0146												
		23.75	.9986	.0152												
6	-3.8	-2.07	-2044	.0142	-2.07	-2103	.0156	-2.07	-2164	.0166	-2.08	.0182	-2.327	-2.08	-2.351	*.0195
		-1.02	-1260	.0153	-1.00	-1352	.0162	-1.00	-1376	.0171	-1.99	.0188	-1.420	-1.99	-1.465	.0202
		-0.03	-0592	.0149	-0.07	-0507	.0161	-0.08	-0554	.0169	-1.10	.0181	-0.544	*.10	-0.531	.0192
		1.08	.0161	.0143	1.13	.0244	.0152	1.16	.0321	.0160	1.19	.0172	.0393	1.19	.0418	.0180
		2.13	.0885	.0133	2.21	.1144	.0139	2.25	.1317	.0143	2.28	.0148	.1427	2.27	.1577	.0162
		3.17	.1639	.0116	3.29	.1989	.0119	3.35	.2384	.0118	3.42	.0127	.2497	3.42	.2826	.0142
		4.23	.2505	.0099	4.37	.2873	.0104	4.42	.3120	.0097	4.49	.0108	.3518	4.51	.3886	.0137
		6.34	.3961	.0077	6.51	.4434	.0088	6.59	.4785	.0091	6.65	.0100	.4473	5.61	.4852	.0119
		8.42	.5137	.0060	8.62	.5602	.0080	7.64	.5398	.0074	7.71	.0097	.5907	7.77	.6812	.0114
		10.50	.6340	.0060	10.72	.6761	.0072	10.80	.7148	.0087	10.88	.0113	.7880			
		12.58	.7459	.0067	12.80	.7761	.0094	12.89	.8162	.0103	13.90	.8440	.0108			
		14.62	.8151	.0093	14.86	.8508	.0111	14.92	.8802	.0121						
		16.63	.8565	.0114	16.79	.8207	.0143	16.87	.8613	.0158						
		18.58	.8193	.0135	18.87	.8783	.0149	17.92	.8968	.0158						
		20.66	.8856	.0139	20.98	.9463	.0158	18.95	.9149	.0165						
		22.76	.04952	.0144	23.11	1.0150	.0174									
6	-5.4	-3.10	-2910	.0172	-3.12	-3152	.0198	-3.13	-3246	.0205	-3.15	.0228	-3.571	-3.16	-3.647	*.0241
		-2.04	-2156	.0182	-2.05	-2327	.0203	-2.05	-2439	.0213	-2.06	.0237	-2.549	-2.06	-2.728	*.0257
		-1.00	-1460	.0190	-0.97	-1481	.0205	-0.97	-1582	.0214	-1.06	.0238	-1.643	-1.96	-1.686	*.0246
		-0.04	-0763	.0185	-0.10	-0728	.0200	-0.12	-0706	.0204	-0.20	.0224	-0.772	*.12	-0.800	*.0240
		1.10	-0066	.0176	1.16	.0042	.0189	1.18	.0046	.0195	1.21	.0210	.0084	1.21	.0086	*.0221
		2.14	.0687	.0161	2.25	.0887	.0169	2.27	.0956	.0172	2.30	.0185	.1037	2.32	.1226	.0202
		3.20	.1466	.0137	3.32	.1732	.0146	3.36	.1989	.0146	3.41	.0160	.2222	3.43	.2269	*.0168
		4.25	.2218	.0120	4.40	.2633	.0127	4.45	.2812	.0121	4.51	.0140	.3225	4.55	.3536	.0164
		6.34	.3643	.0095	6.54	.4196	.0102	6.61	.4476	.0096	6.66	.0117	.4771	6.73	.5621	.0141
		8.44	.4874	.0079	8.67	.5549	.0096	8.71	.5193	.0100	7.73	.0118	.5608	7.81	.6502	*.0137
		10.52	.6018	.0074	10.76	.6639	.0107	10.83	.6977	.0110	10.87	.0127	.7069			
		12.59	.7135	.0086	12.83	.7465	.0114	12.88	.7691	.0125	13.02	.0136	.8713			
		14.62	.7884	.0113	14.88	.8251	.0136	14.94	.8529	.0146	14.98	.0157	.8797			
		16.65	.8295	.0132	16.81	.7950	.0165	16.91	.8463	.0180	16.95	.0165				
		18.62	.8062	.0154	18.88	.8447	.0171	17.93	.8589	.0179	18.98	.0185				
		20.68	.8667	.0155	21.00	.9295	.0176									
		22.76	0.9415	.0168	23.13	1.0072	.0193	24.19	1.0363	.0200						

TABLE VIII.—NORMAL-AND AXIAL-FORCE COEFFICIENTS (FIG 9)

Tail Configuration	i_t deg	$M = .60$			$M = .80$			$M = .85$			$M = .90$			$M = .92$		
		α°	C_N	C_A	α°	C_N	C_A	α°	C_N	C_A	α°	C_N	C_A	α°	C_N	C_A
7	-0.7	.00	-.0133	.0133	.00	-.0179	.0136	.02	-.0111	.0147	.03	.0120	-.3028	-2.64	.1448	.0171
		2.10	.1347	.0119	2.16	.1572	.0118	2.18	.1678	.0126	2.20	.0136	-.0118	.03	-.2075	.0152
		4.21	.2940	.0089	4.32	.3324	.0088	4.37	.3556	.0089	4.40	.0097	.3758	2.29	.2026	.0155
		6.31	.4286	.0069	6.47	.4815	.0076	6.52	.5102	.0080	6.58	.0087	.5456	4.45	.4279	.0117
		8.40	.5462	.0051	8.56	.5982	.0072	8.63	.6296	.0089	8.71	.0105	.6983	6.61	.5972	.0111
		10.46	.6582	.0047	10.67	.7262	.0077	10.73	.7466	.0095	10.82	.0118	.8171	8.73	.7260	.0119
		12.53	.7586	.0065	12.75	.8108	.0090	12.82	.8517	.0108	12.88	.0125	.8995	11.01	.9691	.0119
		14.58	.8533	.0089	14.80	.8911	.0107	14.88	.9266	.0128	14.97	.0146	.9899			
		16.59	.8748	.0116	16.74	.8524	.0149	16.83	.9116	.0169	16.91	.0179				
		18.56	.8519	.0146	18.81	.9137	.0152	18.89	.9826	.0179	18.96	.0196				
		20.63	.9070	.0134	20.91	0.9813	.0153	21.02	1.0421	.0186	21.09	.0204				
		22.72	0.9908	.0130	23.04	1.0406	.0161									
7	-4.8	-3.10	-.2734	.0162	-3.14	-.3008	.0175	-3.15	-.3127	.0187	-3.19	.0214	-.3463	-3.19	-.3700	.0239
		-2.05	-.2010	.0176	-2.06	-.2197	.0191	-2.08	-.2301	.0204	-2.07	.0234	-.2402	-2.07	-.2502	.0253
		.04	-.0584	.0184	.08	-.0595	.0191	.10	-.0615	.0205	.12	.0229	-.0618	.13	-.0553	.0249
		2.15	.0922	.0157	2.23	.1117	.0161	2.27	.1261	.0169	2.32	.0190	.1476	2.35	.1687	.0212
		4.26	.2543	.0125	4.40	.2890	.0130	4.45	.3175	.0128	4.53	.0149	.3700	4.58	.4098	.0169
		6.35	.3971	.0109	6.54	.4359	.0114	6.60	.4719	.0113	6.70	.0133	.5348	6.74	.5787	.0156
		8.43	.5092	.0087	8.64	.5621	.0110	8.69	.5770	.0122	8.77	.0137	.6300	8.87	.7233	.0154
		10.50	.6257	.0083	10.74	.6807	.0112	10.81	.7083	.0131	10.95	.0154	.8141	11.07	.9478	.0158
		12.58	.7412	.0102	12.81	.7743	.0123	12.90	.8098	.0138	13.04	.0159	.9132			
		14.63	.8161	.0113	14.87	.8530	.0132	14.95	.8916	.0150						
		16.63	.8513	.0131	16.79	.8135	.0160	16.90	.8726	.0180						
		18.59	.8197	.0145	18.88	.8803	.0157	18.99	.9397	.0189						
		20.65	.8772	.0143	20.99	.9627	.0168									
		22.76	.9747	.0150	23.06	.9970	.0173									

CONFIDENTIAL

TABLE IX.—NORMAL- AND AXIAL-FORCE COEFFICIENTS (FIG 10)

Tail Configuration	i_t deg	$M = .60$			$M = .80$			$M = .85$			$M = .90$			$M = .92$		
		α°	C_N	C_A	α°	C_N	C_A	α°	C_N	C_A	α°	C_N	C_A	α°	C_N	C_A
5	{-0.7 0}	-3.15	-2280	.0093	-3.22	-2506	.0100	-3.23	-2628	.0105	-3.26	.0131	-2861	-3.28	-3069	.0141
		-2.10	-1501	.0113	-2.14	-1589	.0117	-2.15	-1704	.0118	-2.17	.0148	-1911	-2.18	-1950	.0168
		-1.04	-0723	.0129	-1.08	-0823	.0130	-1.08	-0868	.0136	-1.07	.0154	-0909	-1.08	-0958	.0172
		.00	-0055	.0128	.00	.0039	.0133	.01	.0006	.0137	.01	.0154	-0073	.02	-0010	.0162
		1.04	.0697	.0131	1.09	.0827	.0135	1.09	.0792	.0137	1.11	.0148	.0830	1.10	.0888	.0160
		2.10	.1390	.0120	2.15	.1669	.0121	2.17	.1751	.0123	2.20	.0133	.1847	2.20	.1923	.0142
		3.14	.2225	.0101	3.22	.2435	.0100	3.25	.2571	.0355	3.30	.0107	.2877	3.31	.3046	.0120
		4.20	.3058	.0079	4.31	.3337	.0081	4.33	.3408	.0077	4.39	.0083	.3860	4.40	.4010	.0104
		5.24	.3754	.0064				5.42	.4280	.0060	5.47	.0067	.4649	5.51	.5021	.0082
		6.30	.4506	.0052	6.43	.4779	.0060	6.49	.5065	.0053	6.55	.0053	.5500	6.60	.6090	.0071
		8.37	.5702	.0026	8.54	.5975	.0045	7.57	.5936	.0044	7.60	.0047	.5991	7.68	.6972	.0066
		10.46	.6923	.0016	10.65	.7392	.0038	8.61	.6544	.0041	8.70	.0050	.7185	8.75	.7771	.0052
		12.52	.7951	.0016	12.72	.8383	.0039	9.68	.7328	.0040	9.74	.0054	.7627	9.83	.8727	.0045
		14.56	.9001	.0030	14.77	.9345	.0046	10.72	.7730	.0042	10.80	.0054	.8363	10.91	.9527	.0036
		16.57	.9347	.0045	16.69	.9215	.0074	11.75	.8249	.0041	11.88	.0049	.9261			
		18.52	.9261	.0068	17.46	-1493	.0005	12.79	.8715	.0041	12.91	.0043	.9586			
		20.58	1.0099	.0050	19.54	-0744	-.0021	13.82	.9147	.0049	13.92	.0040	.9829			
		21.30	.5801	-.0016												
		22.33	.5435	-.0022												
5	{-4.0 0}	-3.11	.2655	.0137	-3.17	.2860	.0157	-3.18	.2962	.0166	-3.21	.0207	-3177	-3.24	-3270	.0206
		-2.07	.1962	.0143	-2.09	.2073	.0166	-2.09	.2088	.0180	-2.12	.0213	-2179	-2.14	-2273	.0224
		-1.01	.1209	.0167	-1.03	.1266	.0177	-1.01	.1246	.0160	-1.02	.0214	-1222	-1.04	-1279	.0233
		.03	.0514	.0165	.06	.0459	.0172	.06	.0425	.0180	.08	.0210	.0316	.06	.0329	.0220
		1.09	.0265	.0170	1.13	.0327	.0169	1.15	.0400	.0176	1.16	.0192	.0461	1.16	.0685	.0216
		2.12	.1013	.0157	2.20	.1226	.0152	2.24	.1358	.0159	2.27	.0173	.1497	2.28	.1886	.0207
		3.18	.1793	.0136	3.28	.2068	.0129	3.31	.2145	.0137	3.36	.0153	.2515	3.39	.2788	.0179
		4.23	.2655	.0119	4.35	.2892	.0114	4.39	.3071	.0110	4.47	.0131	.3500	4.49	.3865	.0149
		6.32	.3988	.0087	6.48	.4408	.0087	5.48	.3858	.0090	5.55	.0107	.4323	5.58	.4782	.0130
		8.39	.5182	.0060	8.57	.5617	.0073	6.55	.4645	.0082	6.62	.0094	.5062	6.65	.5459	.0110
		10.48	.6432	.0048	10.69	.6891	.0064	7.61	.5376	.0076	7.67	.0089	.5796	7.75	.6546	.0101
		12.55	.7570	.0047	12.77	.7988	.0065	10.76	.7291	.0071	10.85	.0084	.7840	8.80	.7342	.0093
		14.58	.8508	.0059	14.80	.8726	.0062	11.83	.8110	.0066	11.91	.0079	.8494			
		16.59	.8935	.0072	16.73	.8768	.0086	12.84	.8330	.0072	12.97	.0072	.9231			
		18.53	.8819	.0082	17.50	-1979	.0019	13.85	.8674	.0067						
		19.24	-.7139	.0025	19.60	-.0899	-.0003	15.85	.9178	.0078						
		21.32	-.6075	.0009	21.71	-.0051	-.0020	16.59	-.1437	.0040						
		22.37	-.5628	.0009	22.78	0.0666	-.0019	17.62	-.0576	.0021						




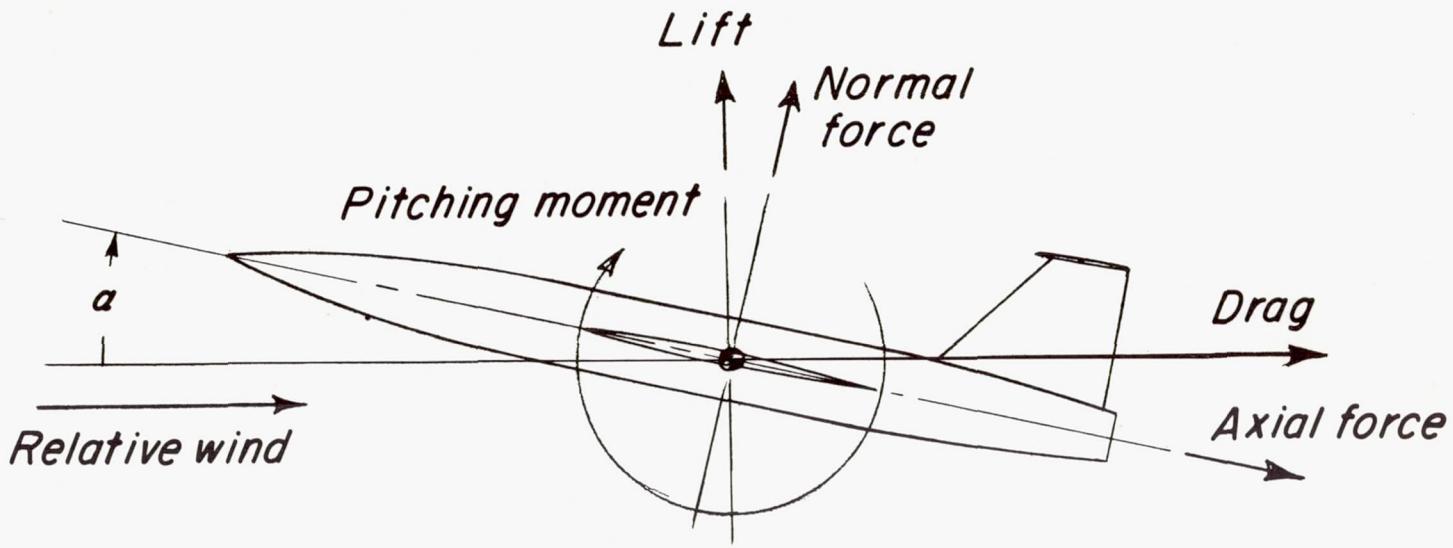


Figure 1.- System of axes. Positive values of forces, moments, and angles are indicated by arrows.

CONFIDENTIAL

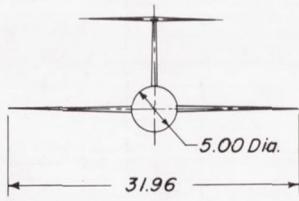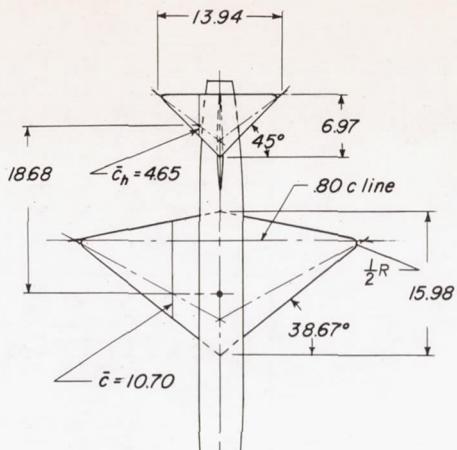


Geometric Characteristics Of Model			
	Wing	Horiz. tail	Vert. tail
Area, ft^2	1.773	.337	.603
Aspect ratio	4.00	4.00	1.16
Taper ratio	0	0	4.11
$\Delta c_{\frac{1}{4}}$, deg	28.82	36.85	28.00
NACA airfoil section parallel to airstream	65A004	65A 006	65A006

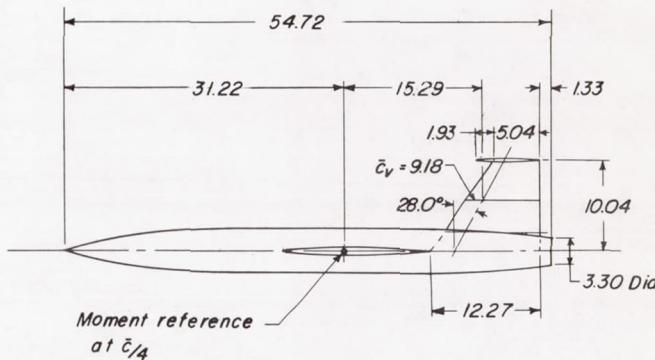

(a) Three-view drawing of basic model. Wing aspect ratio 4.00. All dimensions are in inches.


Figure 2.- Geometric characteristics of model.

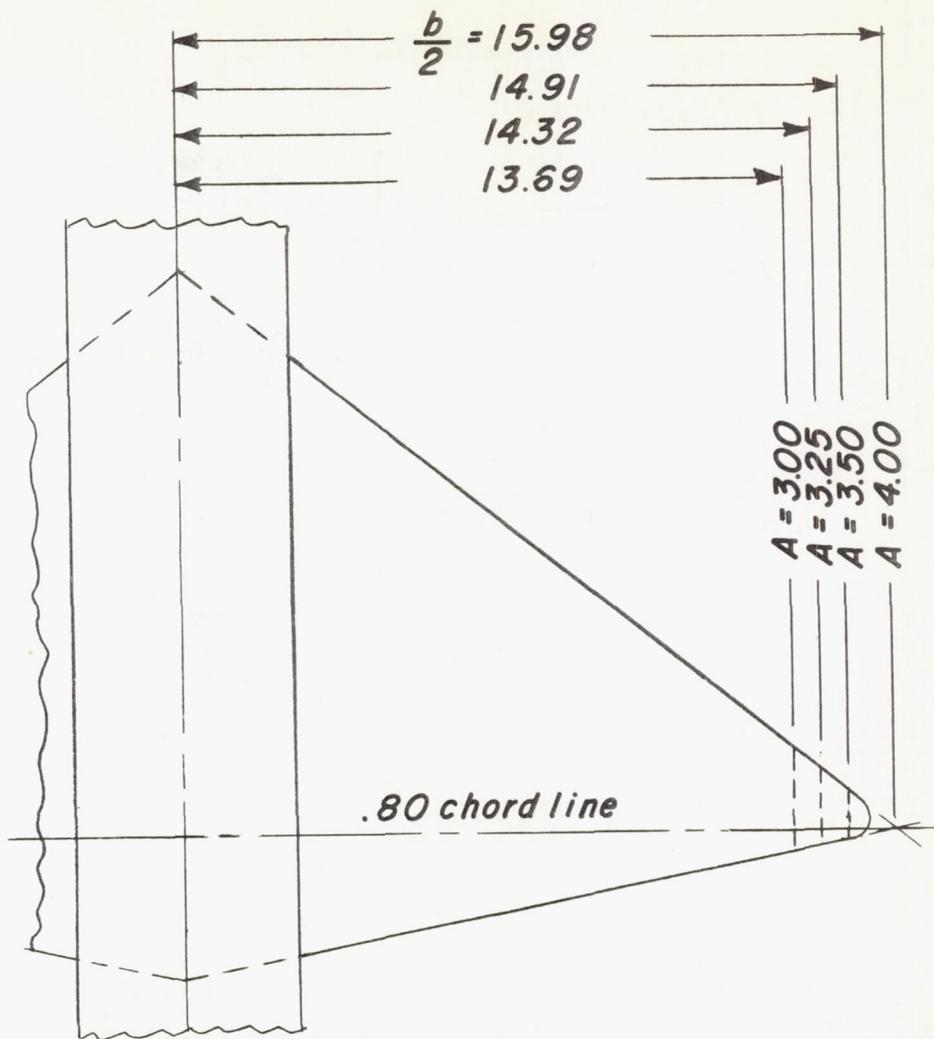

A	λ	$A_{\infty c}$	c_r	c_t	\bar{c}	S	Δx
4.00	0	0°	15.98	0	10.65	1.77	0
3.50	.067			1.07	10.70	1.77	-.017
3.25	.104			1.66	10.76	1.76	-.062
3.00	.143	↓	↓	2.28	10.83	1.74	-.095

(b) Wing-tip modifications of basic aspect-ratio-4.00 wing. All dimensions are in inches.


Figure 2.- Continued.

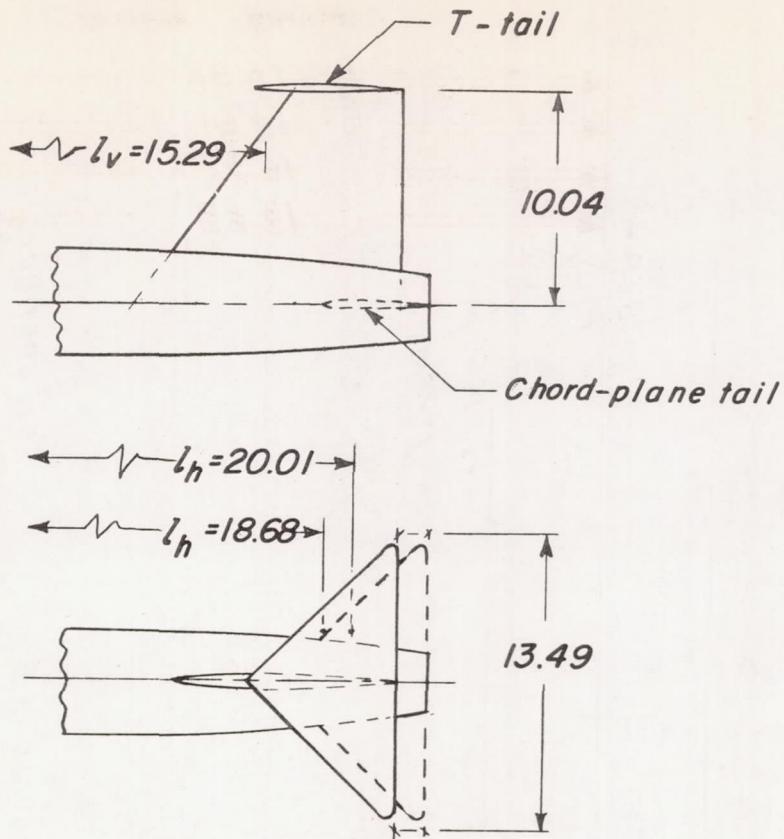


Tail Configuration	Horizontal tail	Vertical tail (Unswept trailing edge)
	Off	Off
	Off	On
	Chord-plane tail	On
	T-tail	On
	Biplane tail	On

(c) Model tail configurations with unswept trailing-edge vertical tail.


Figure 2.- Continued.

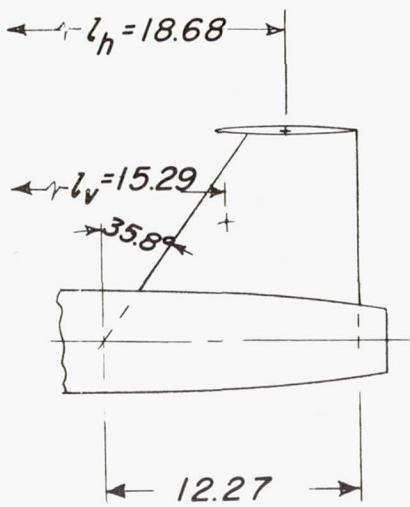

Tail configuration 4

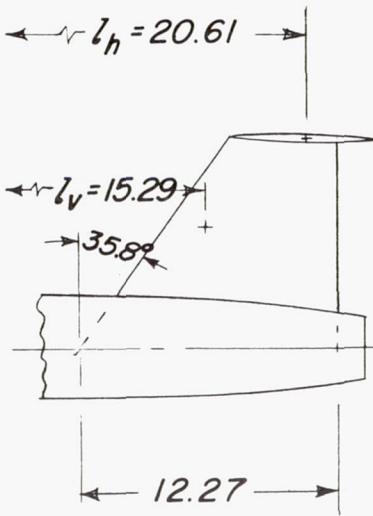


Tail configuration 6

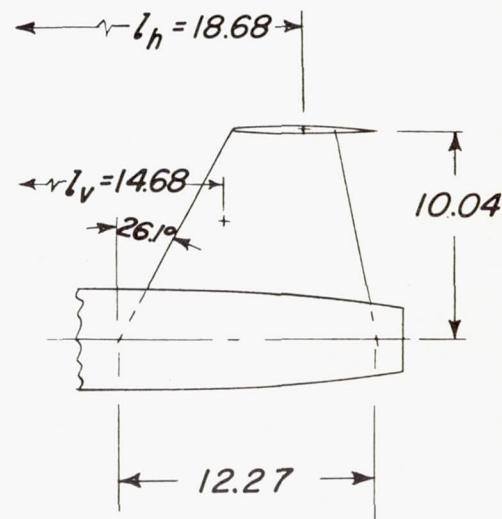

Tail configuration 7

(a) Horizontal-tail overhang and tail length.

Figure 2.- Continued.

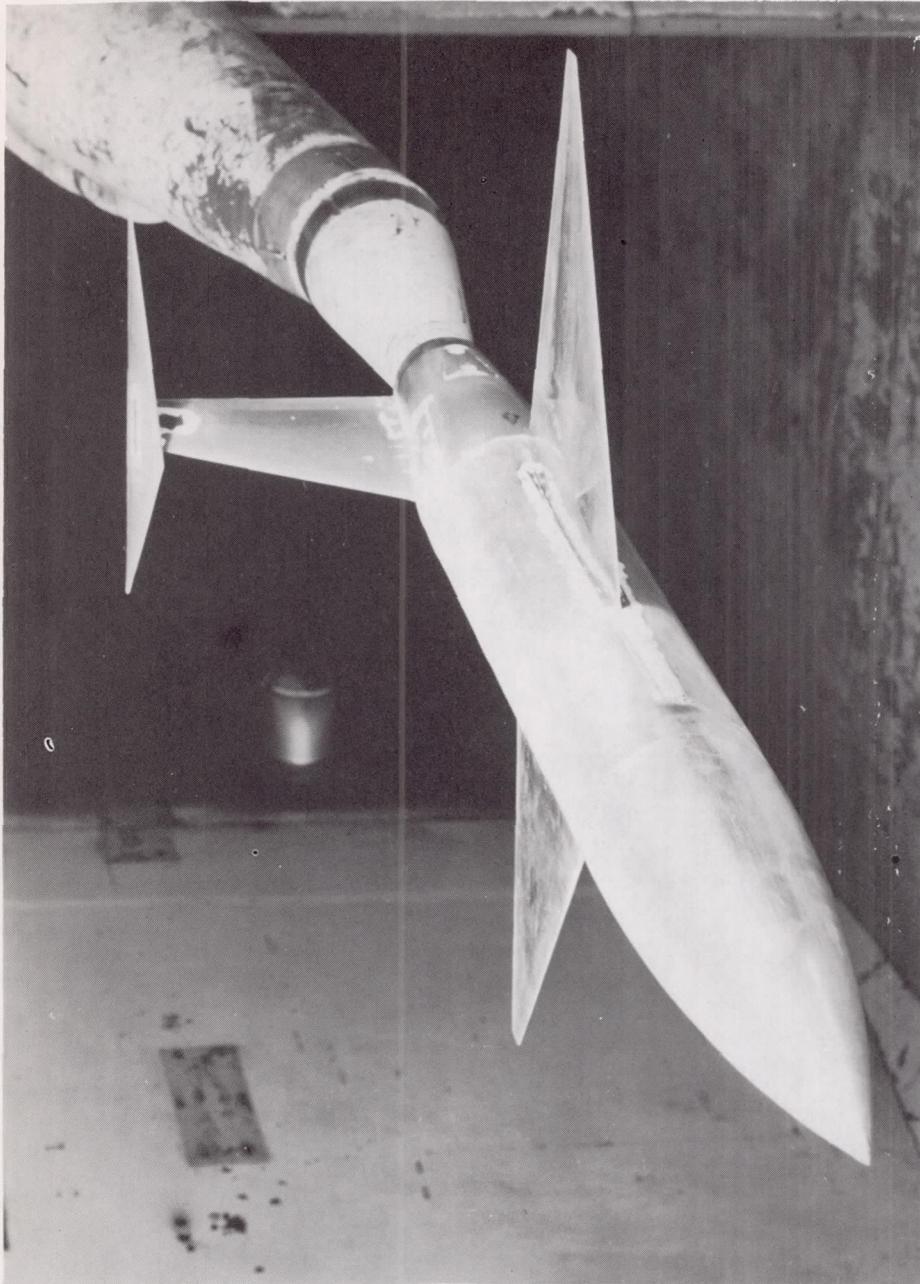

I-89250

(e) Photograph of model mounted in tunnel.

Figure 2.- Concluded.

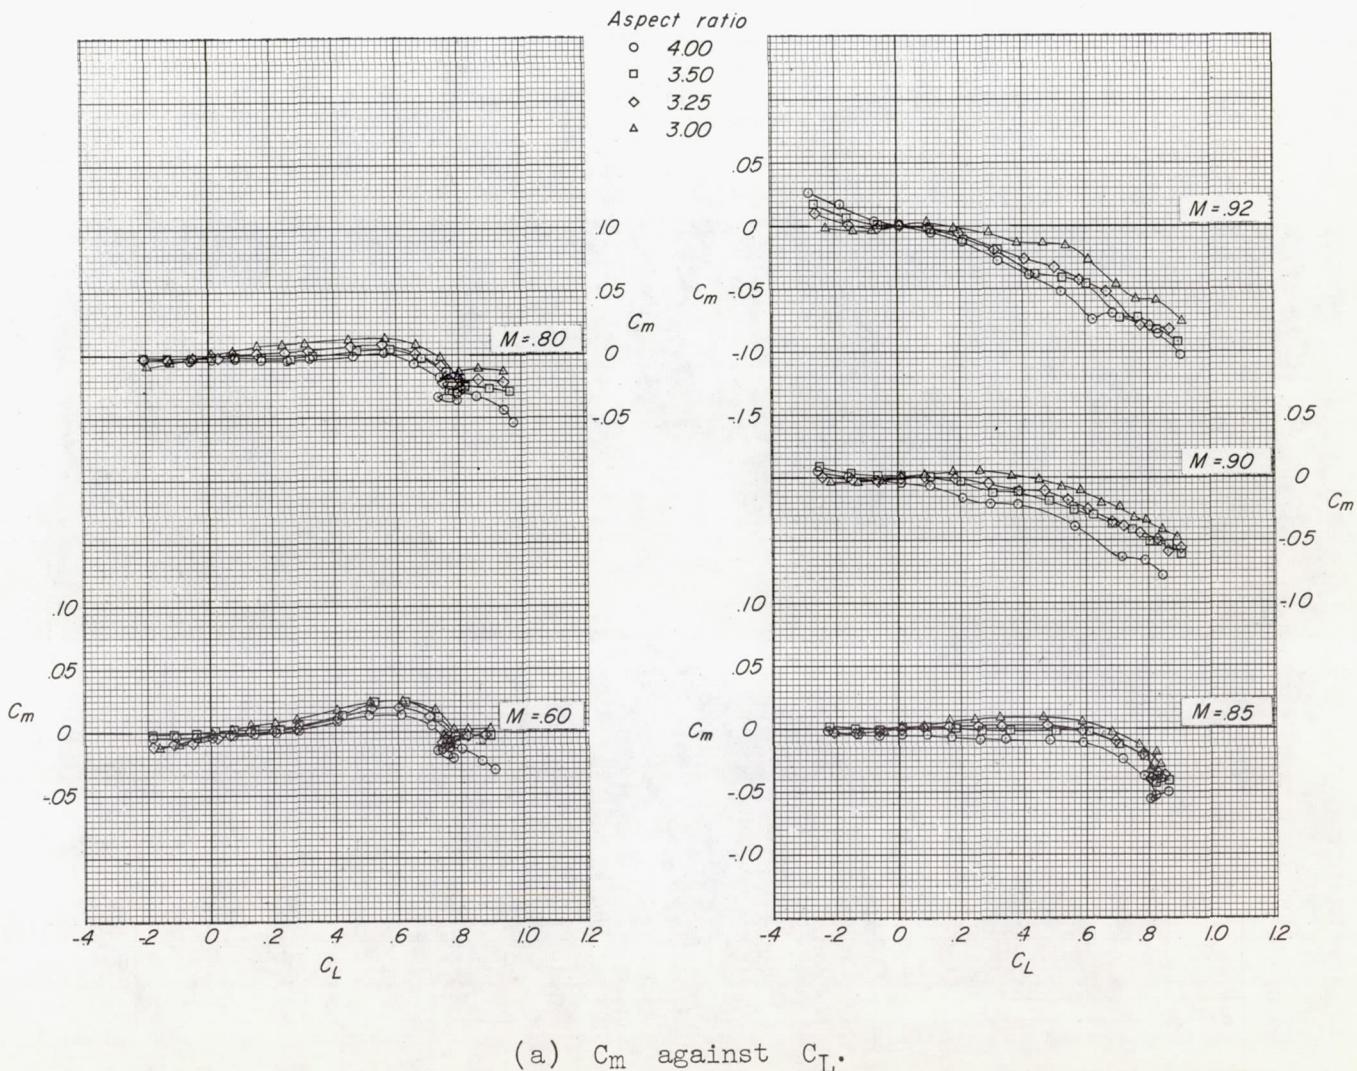


Figure 3.- Effect of aspect ratio on the longitudinal aerodynamic characteristics of the model. Tail off.

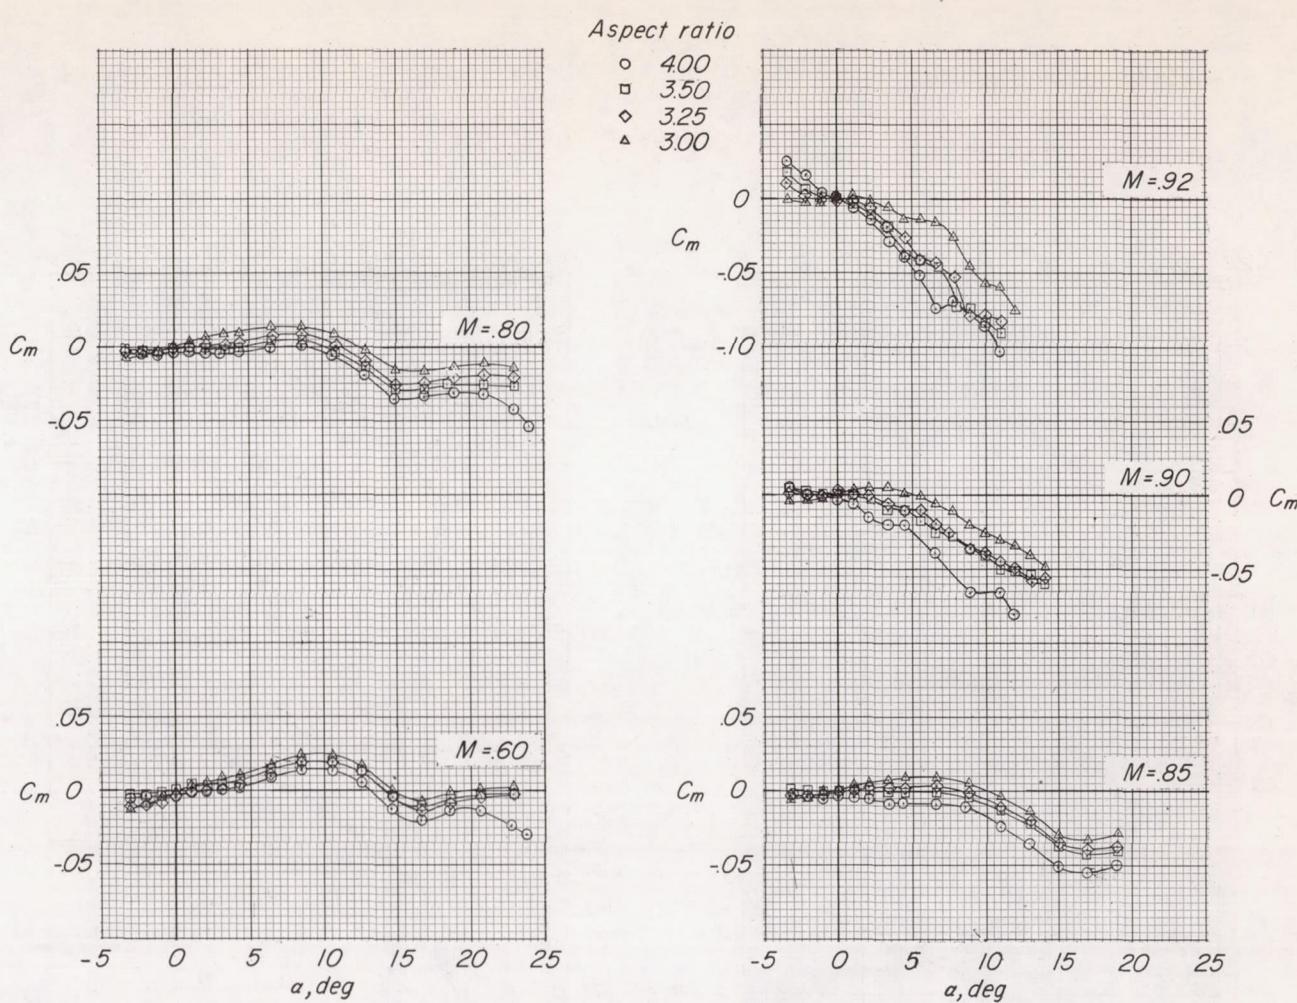
(b) C_m against α .

Figure 3.- Continued.

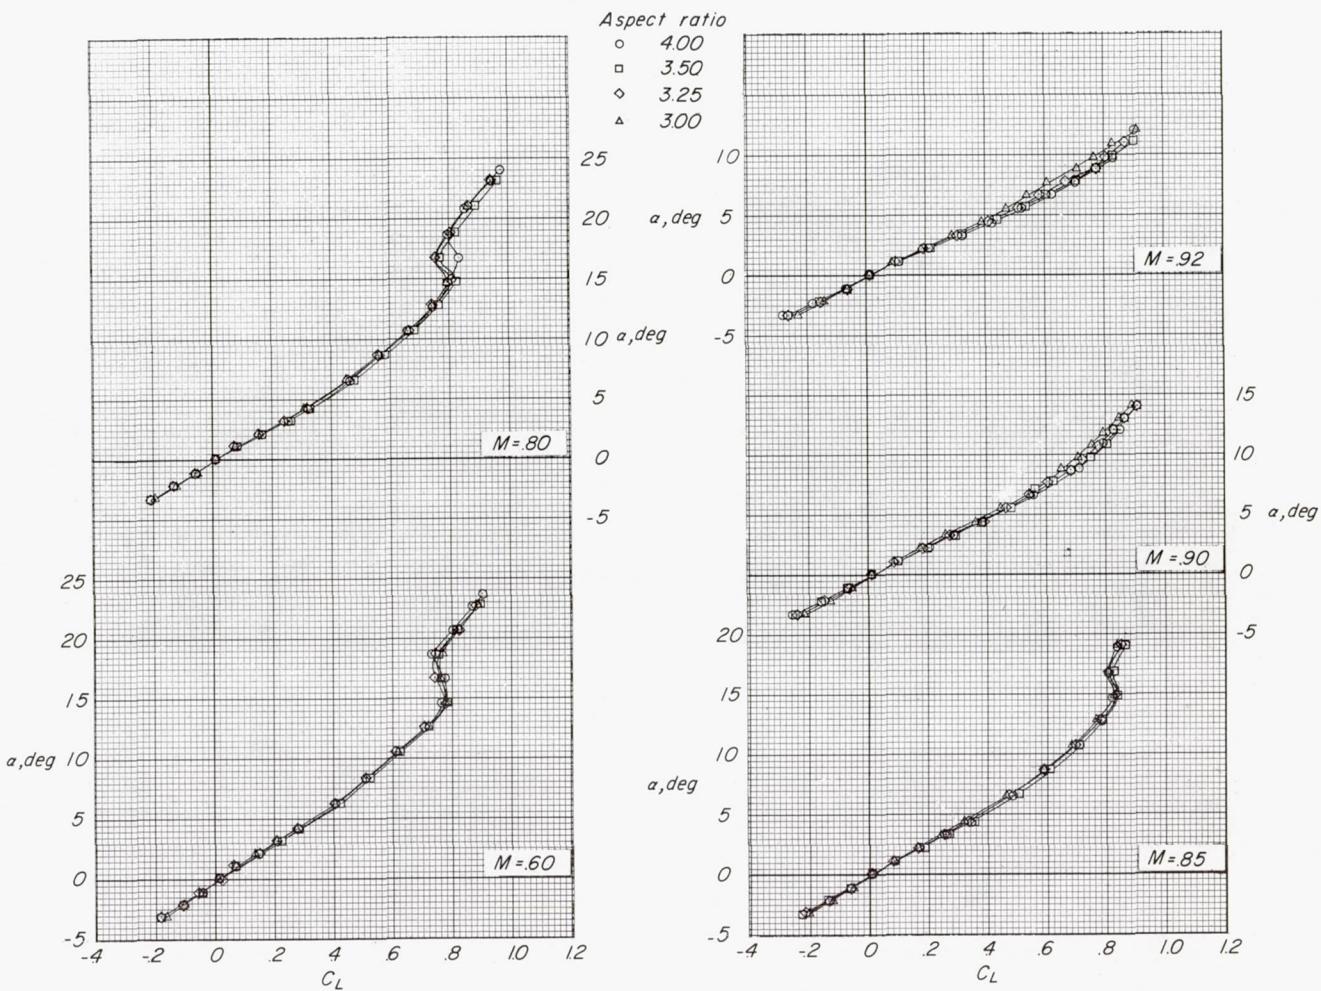
(c) α against C_L .

Figure 3.- Continued.

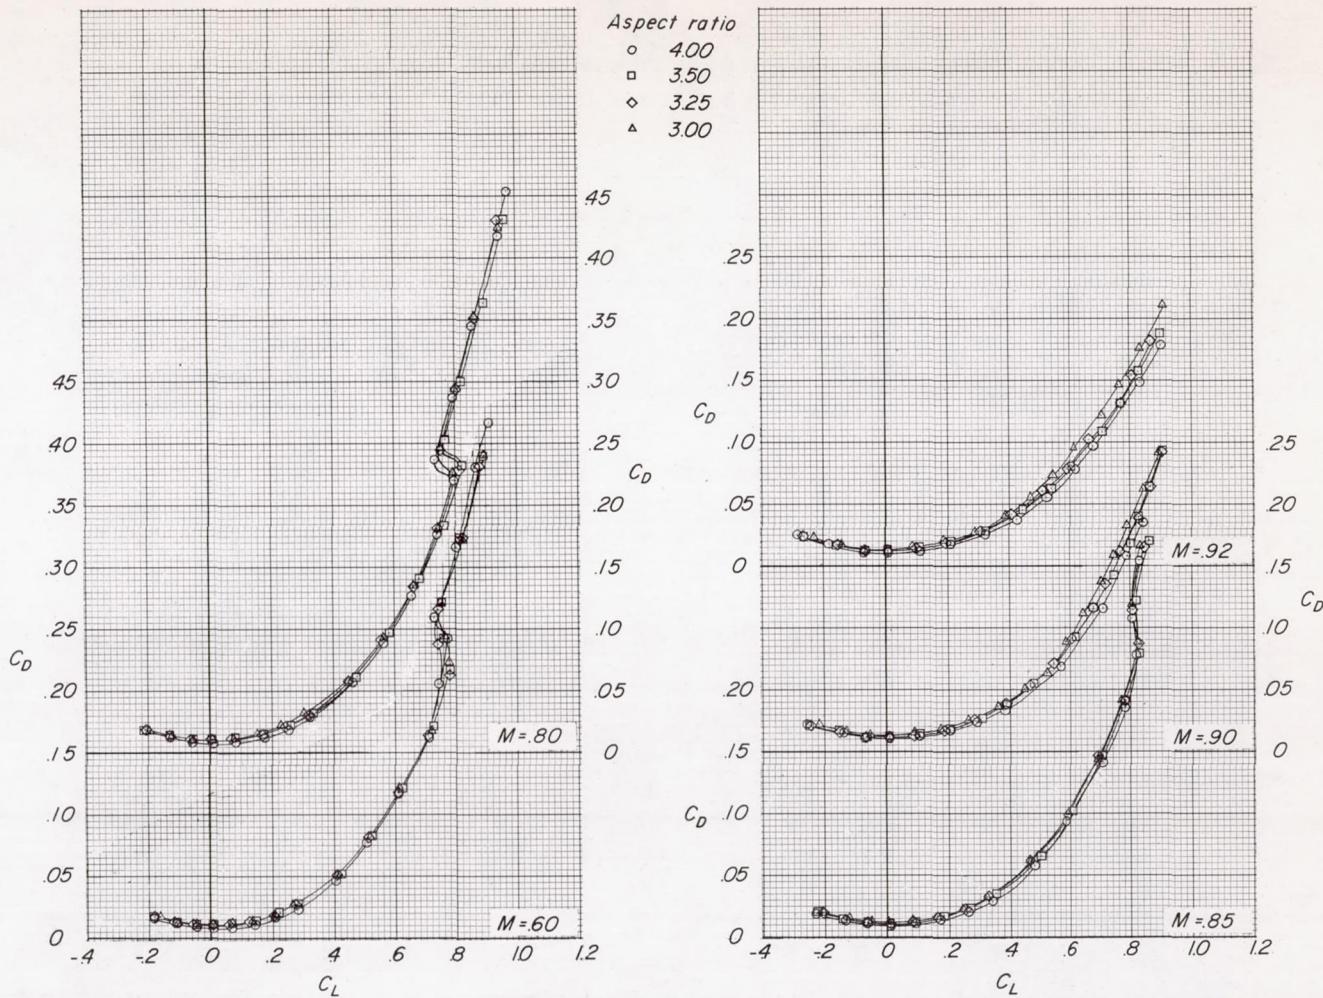
(d) C_D against C_L .

Figure 3.- Concluded.

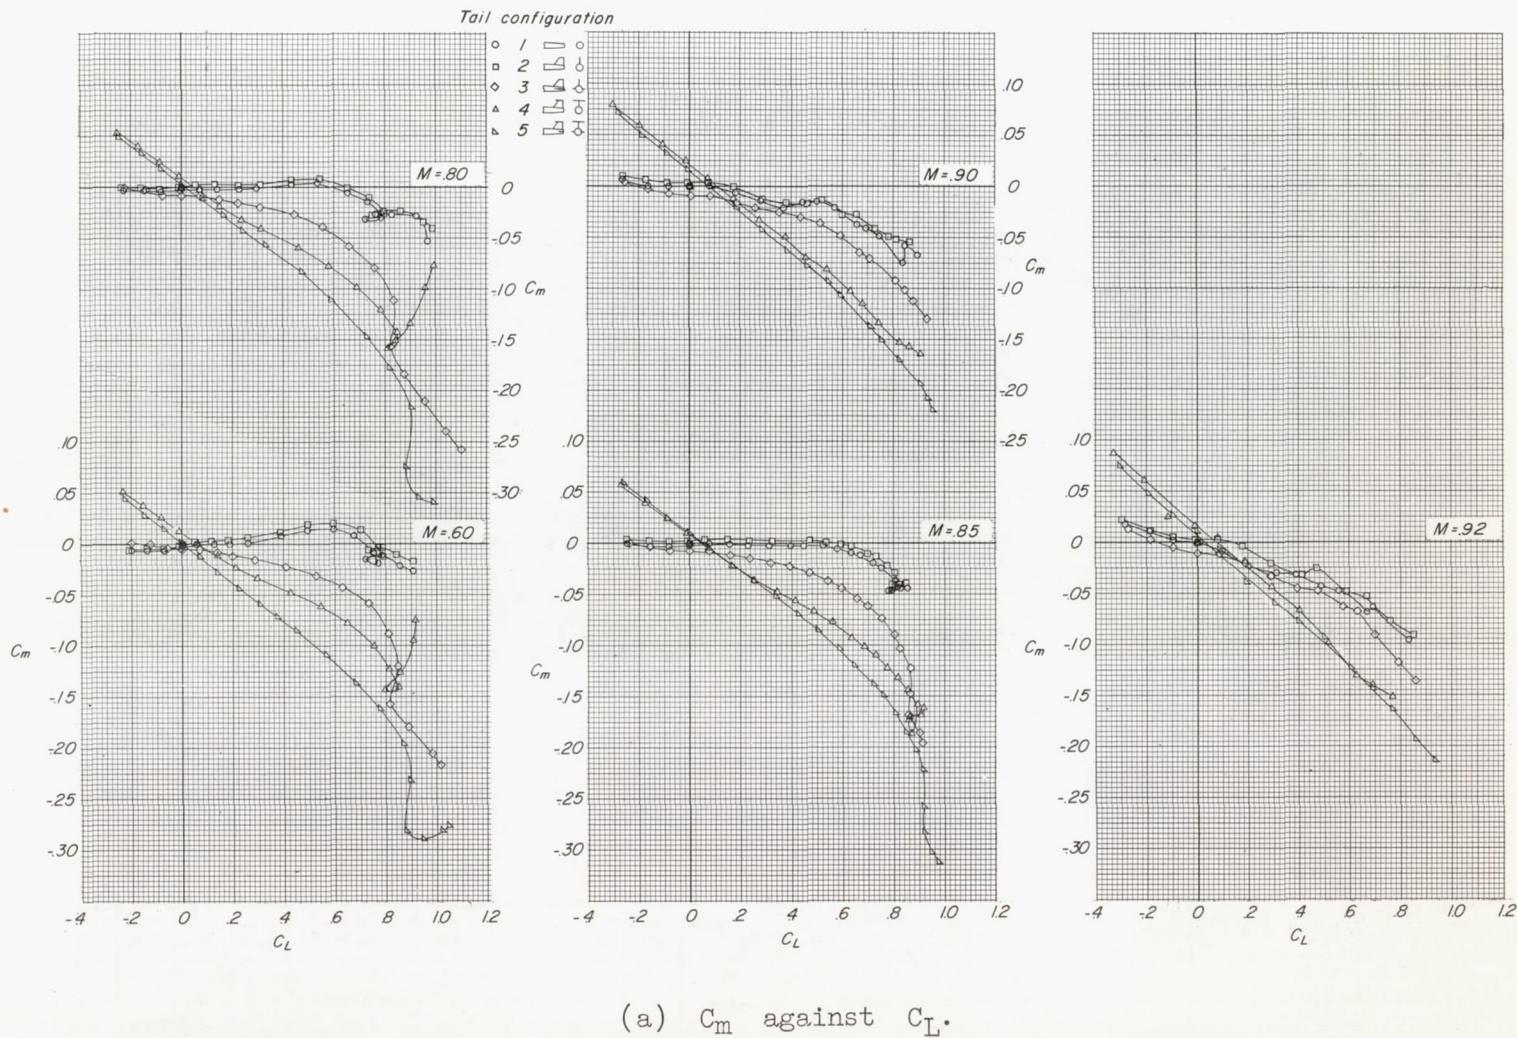


Figure 4.- Longitudinal aerodynamic characteristics of the model for several tail configurations. Wing aspect ratio, 3.50.

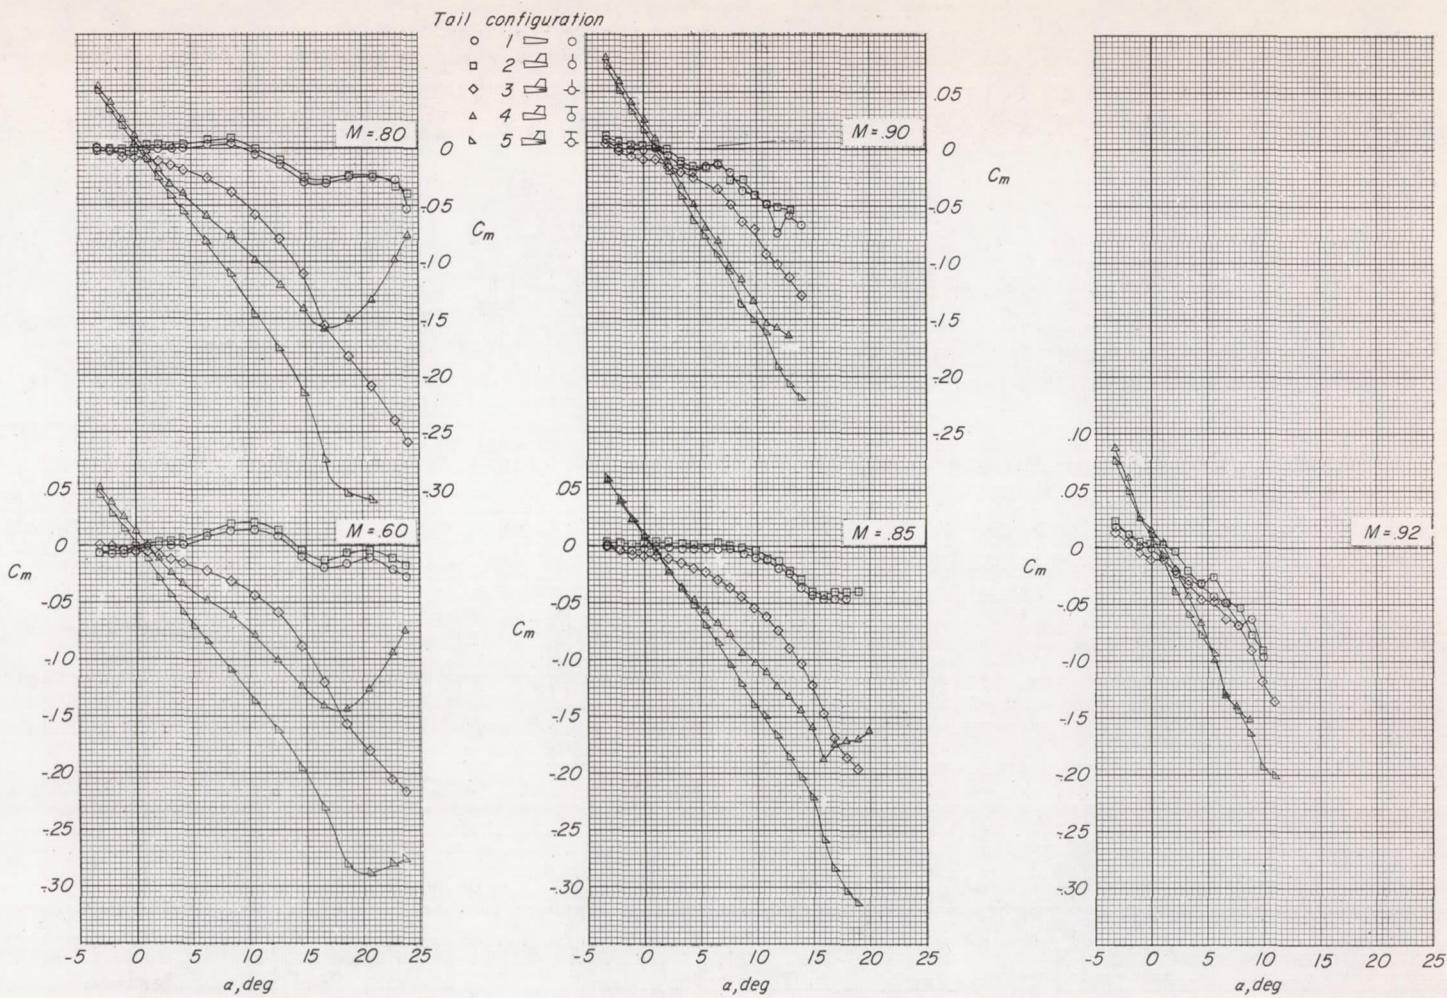
(b) C_m against α .

Figure 4.- Continued.

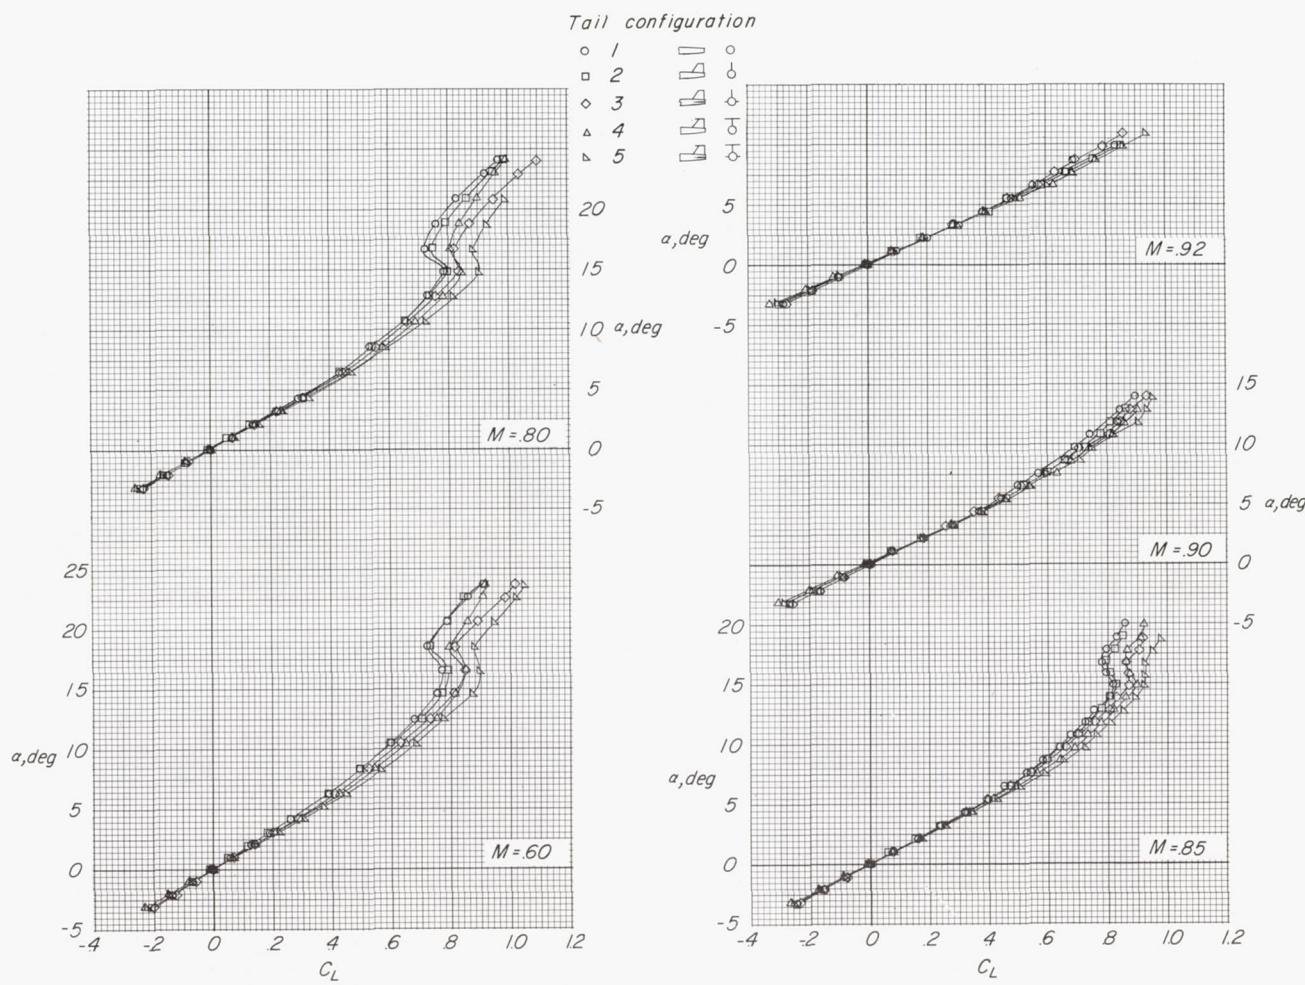
(c) α against C_L .

Figure 4.- Continued.

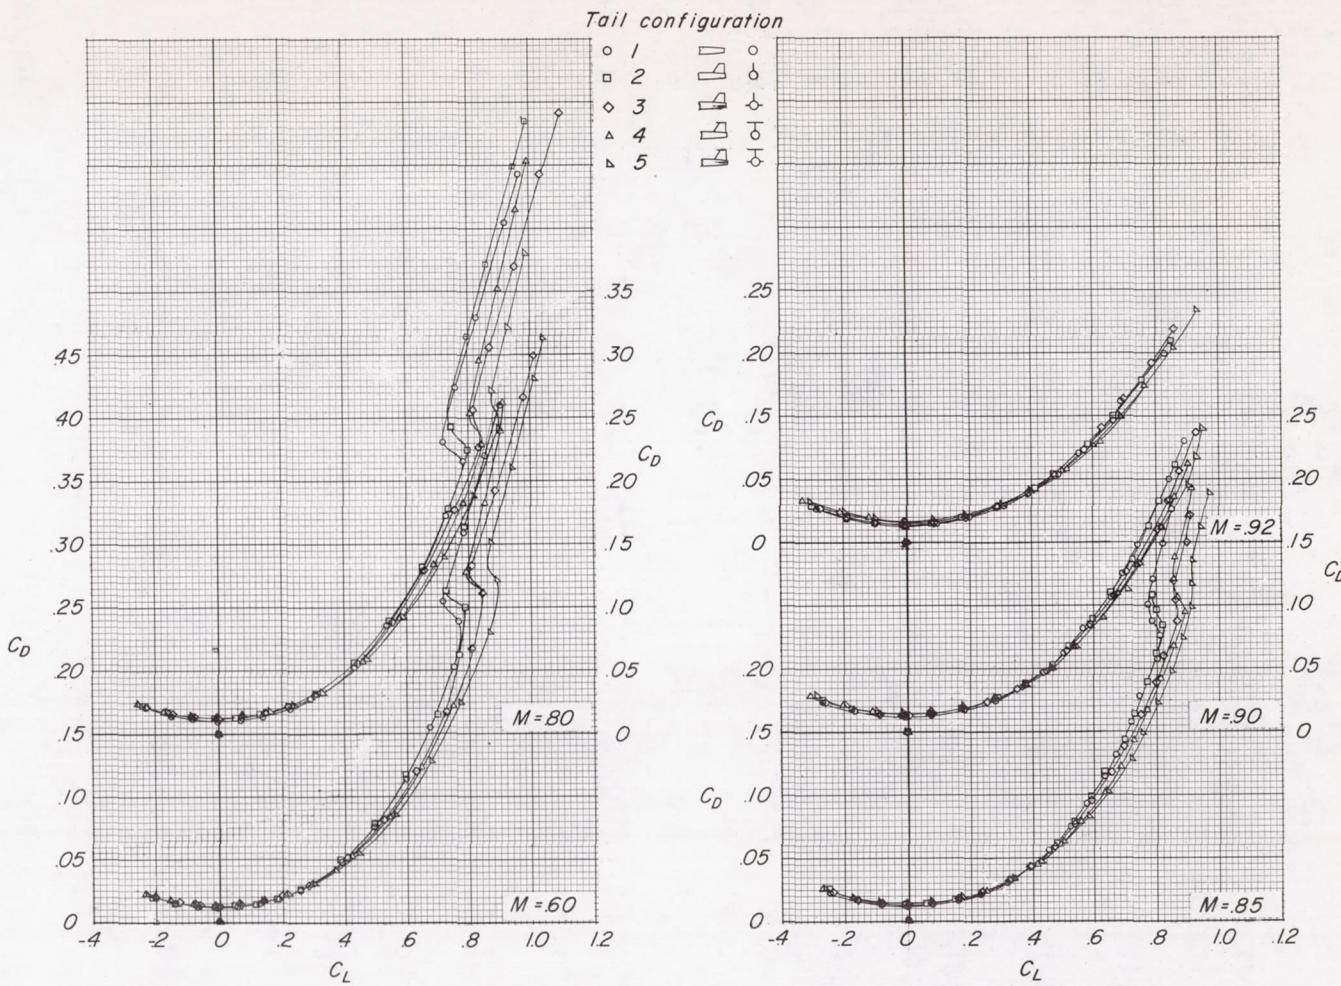
(d) C_D against C_L .

Figure 4.- Concluded.

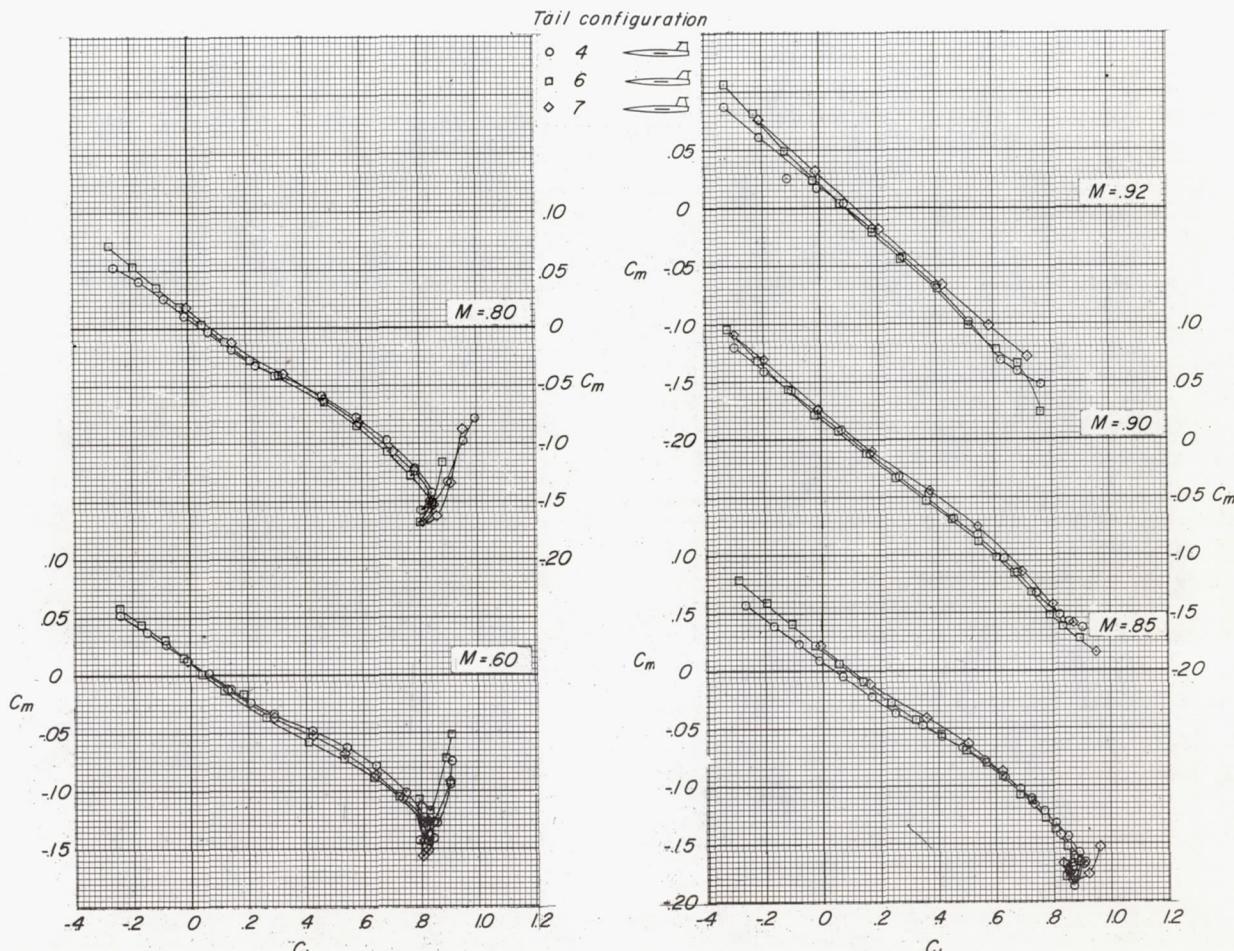
(a) C_m against C_L .

Figure 5.- Effect on the longitudinal aerodynamic characteristics of several variations of the T-tail arrangement. Wing aspect ratio, 3.50.

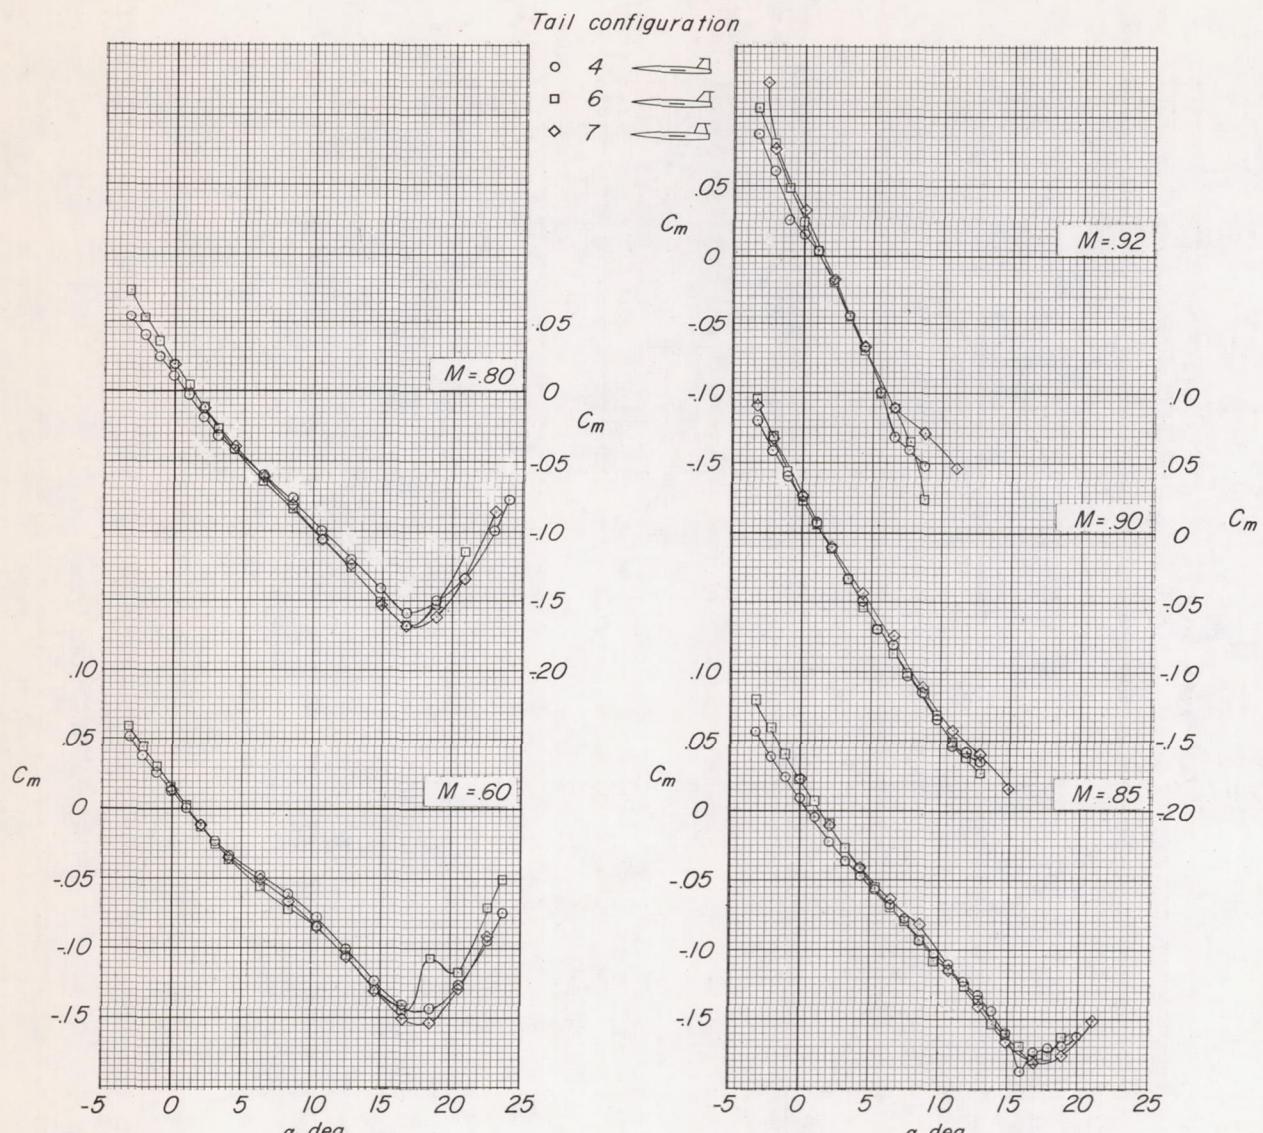
(b) C_m against α .

Figure 5.- Continued.

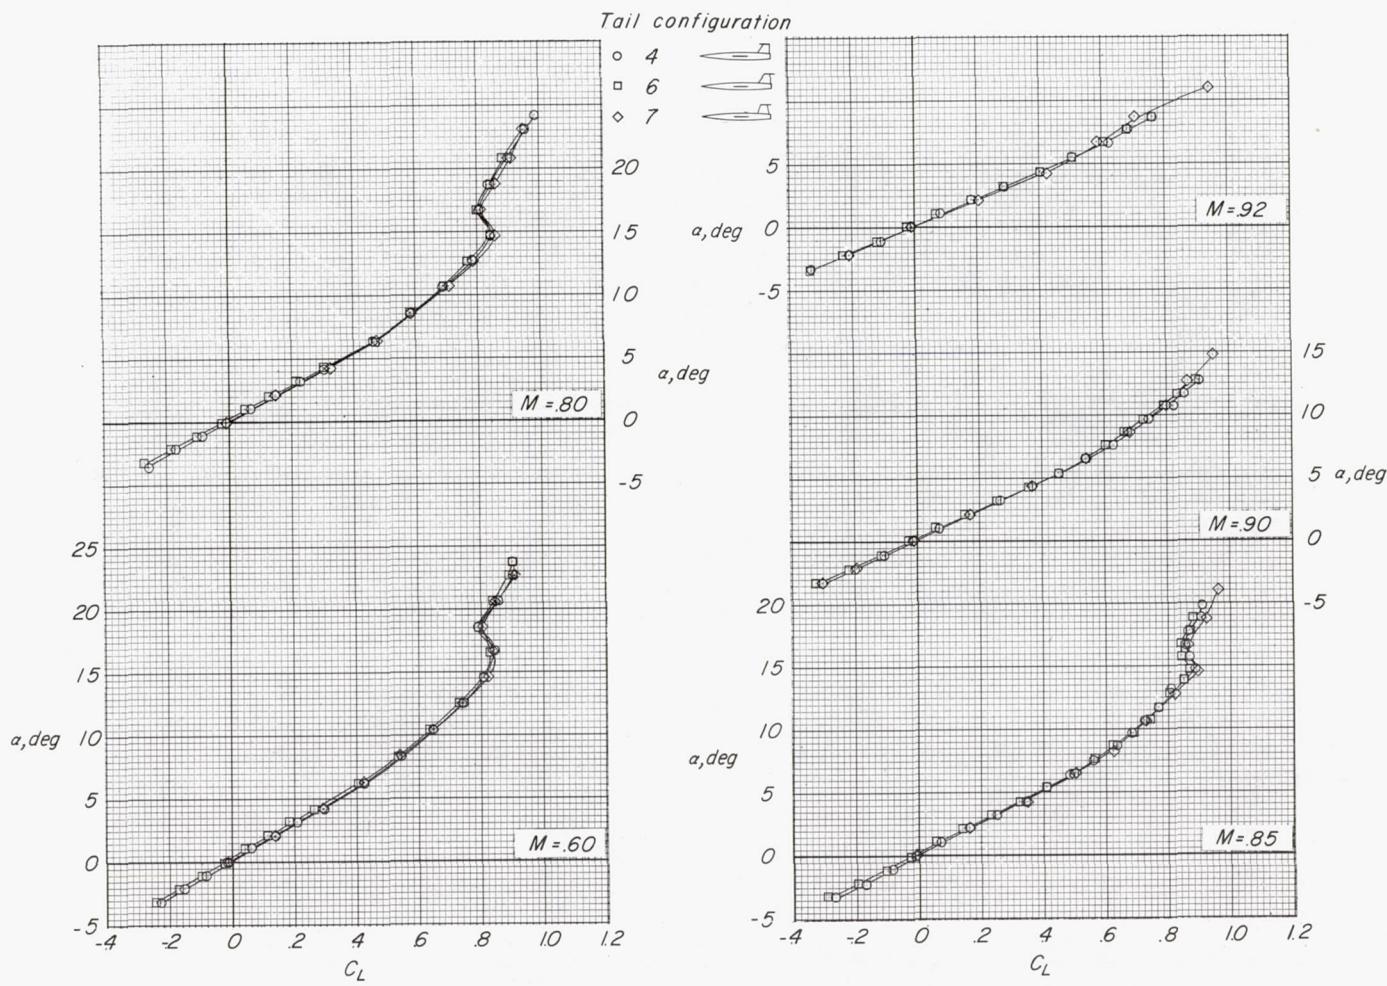
(c) α against C_L .

Figure 5.- Continued.

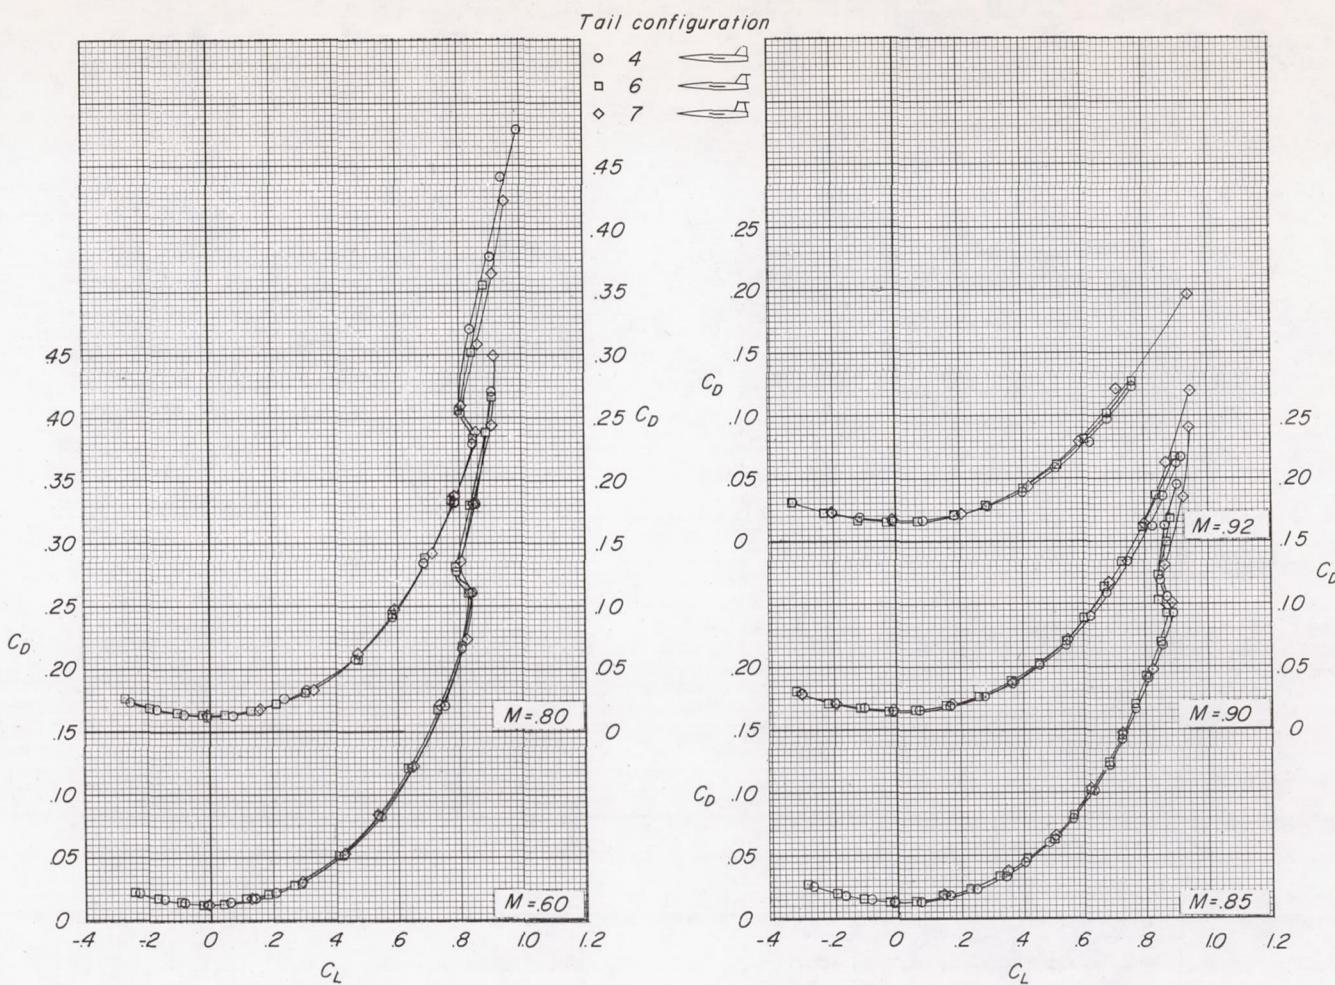
(d) C_D against C_L .

Figure 5.- Concluded.

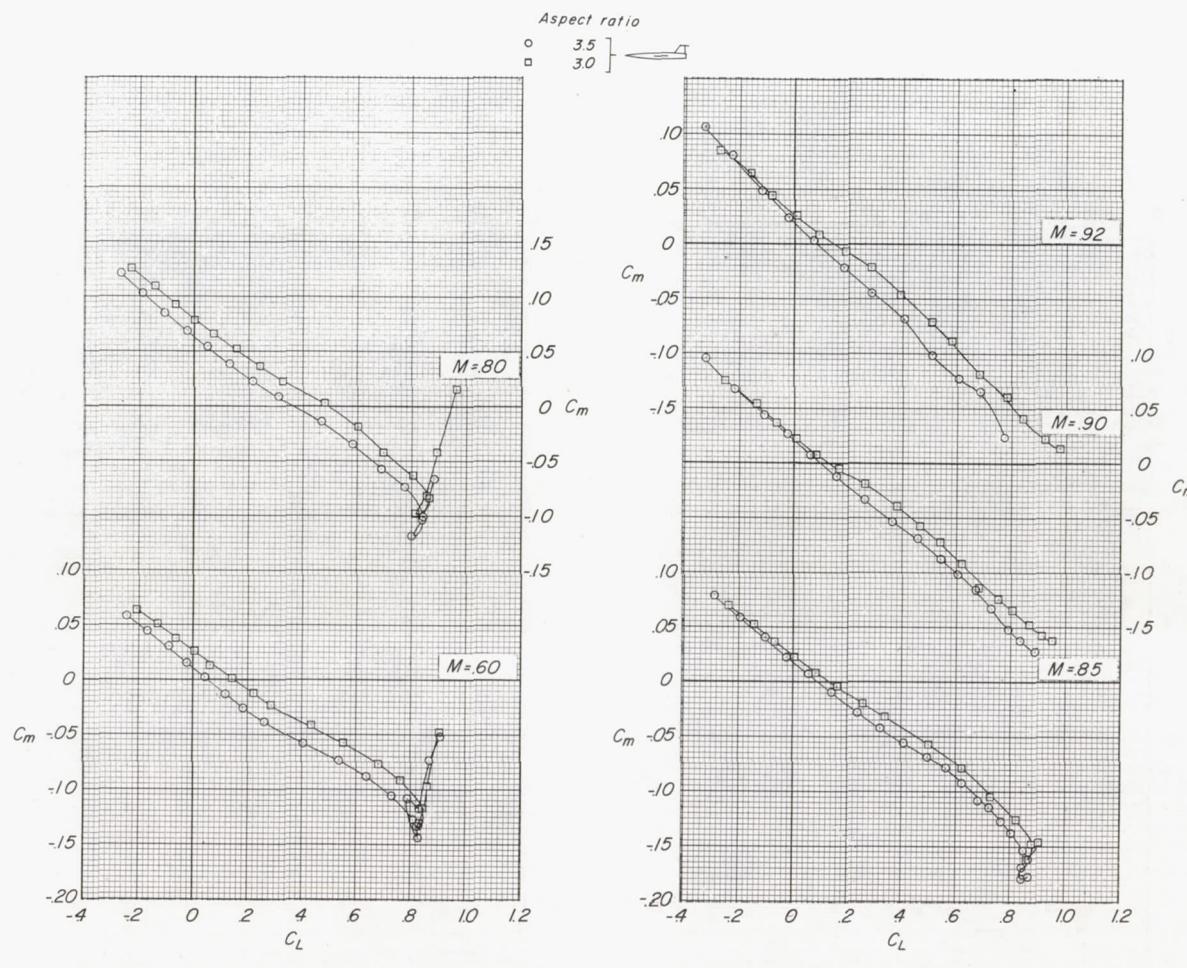
(a) C_m against C_L .

Figure 6.- Effect of wing aspect ratio on the longitudinal characteristics of the T-tail model. Tail configuration 6.

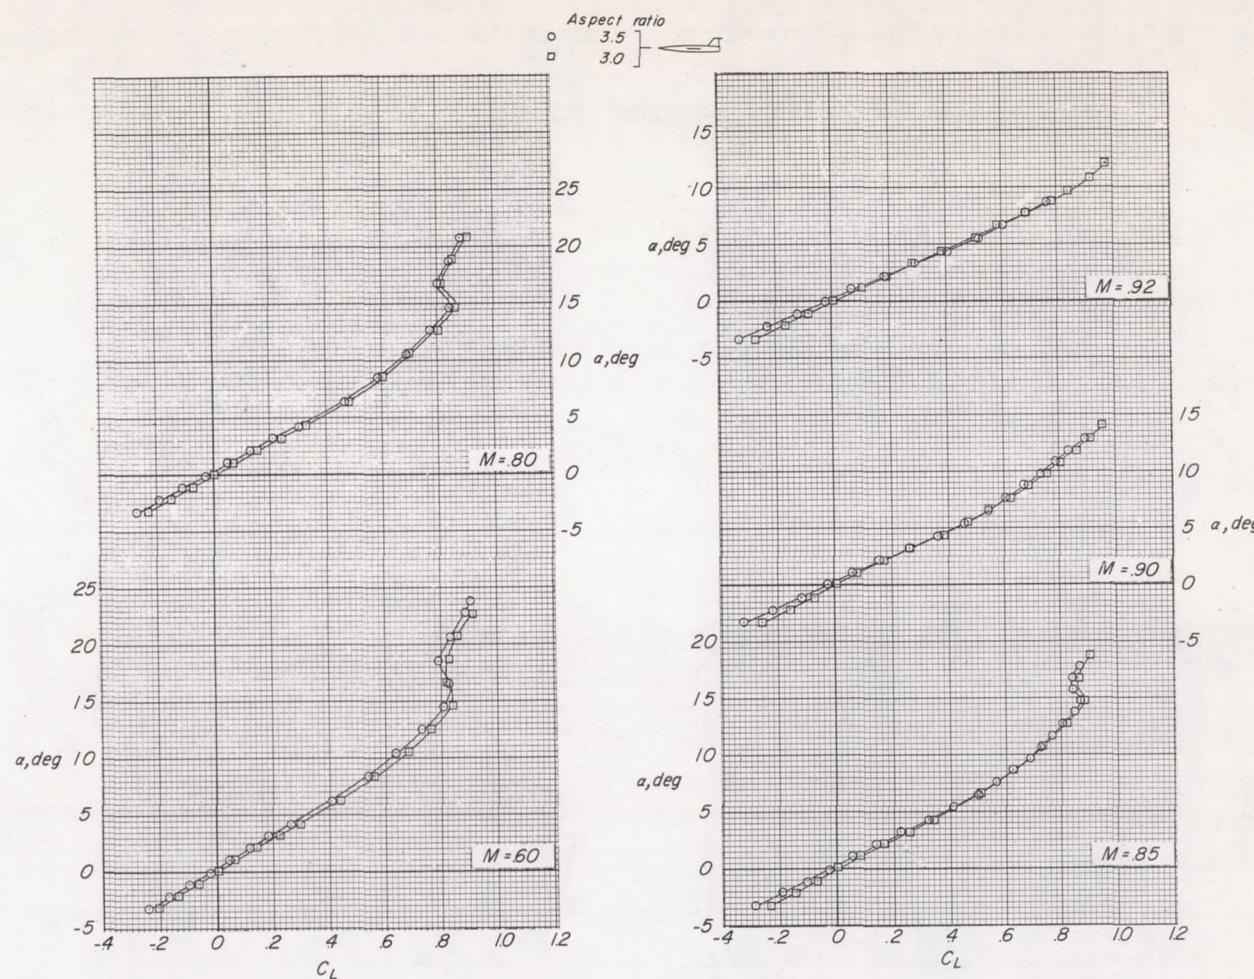
(b) α against C_L .

Figure 6.- Continued.

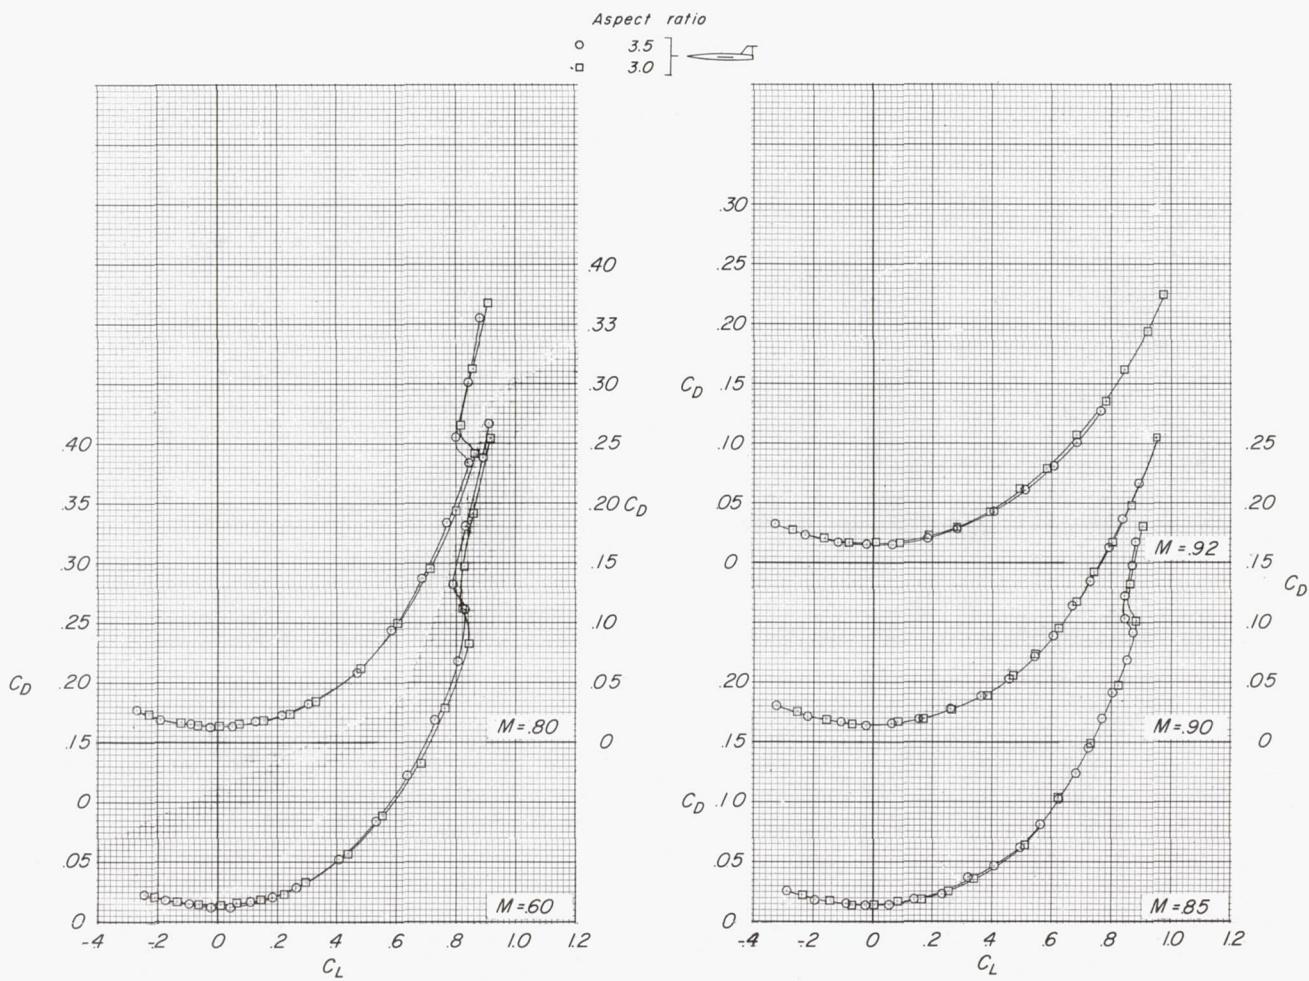
(c) C_D against C_L .

Figure 6.- Concluded.

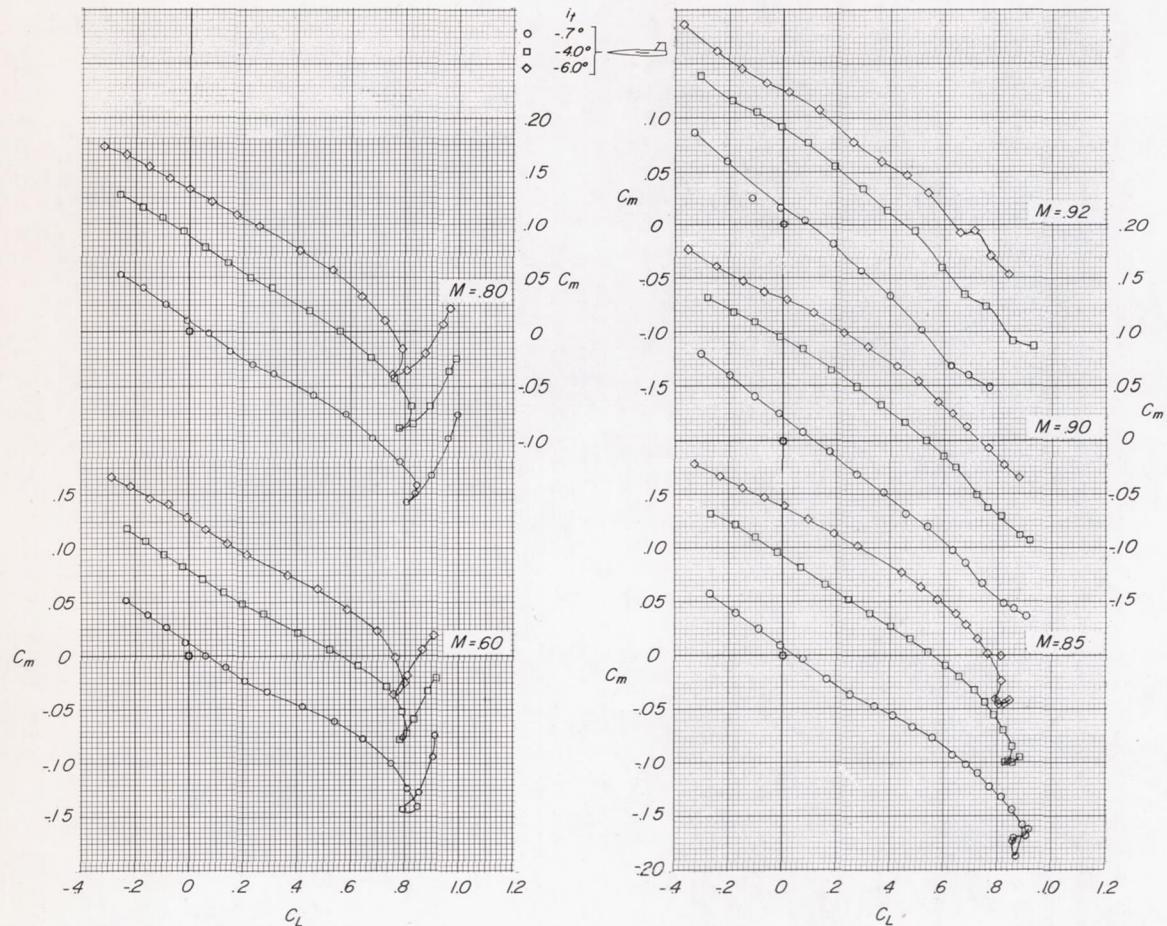
(a) C_m against C_L .

Figure 7.- Effect of stabilizer deflection on the aerodynamic characteristics of the T-tail with leading-edge overhang. Tail configuration 4; wing aspect ratio, 3.50.

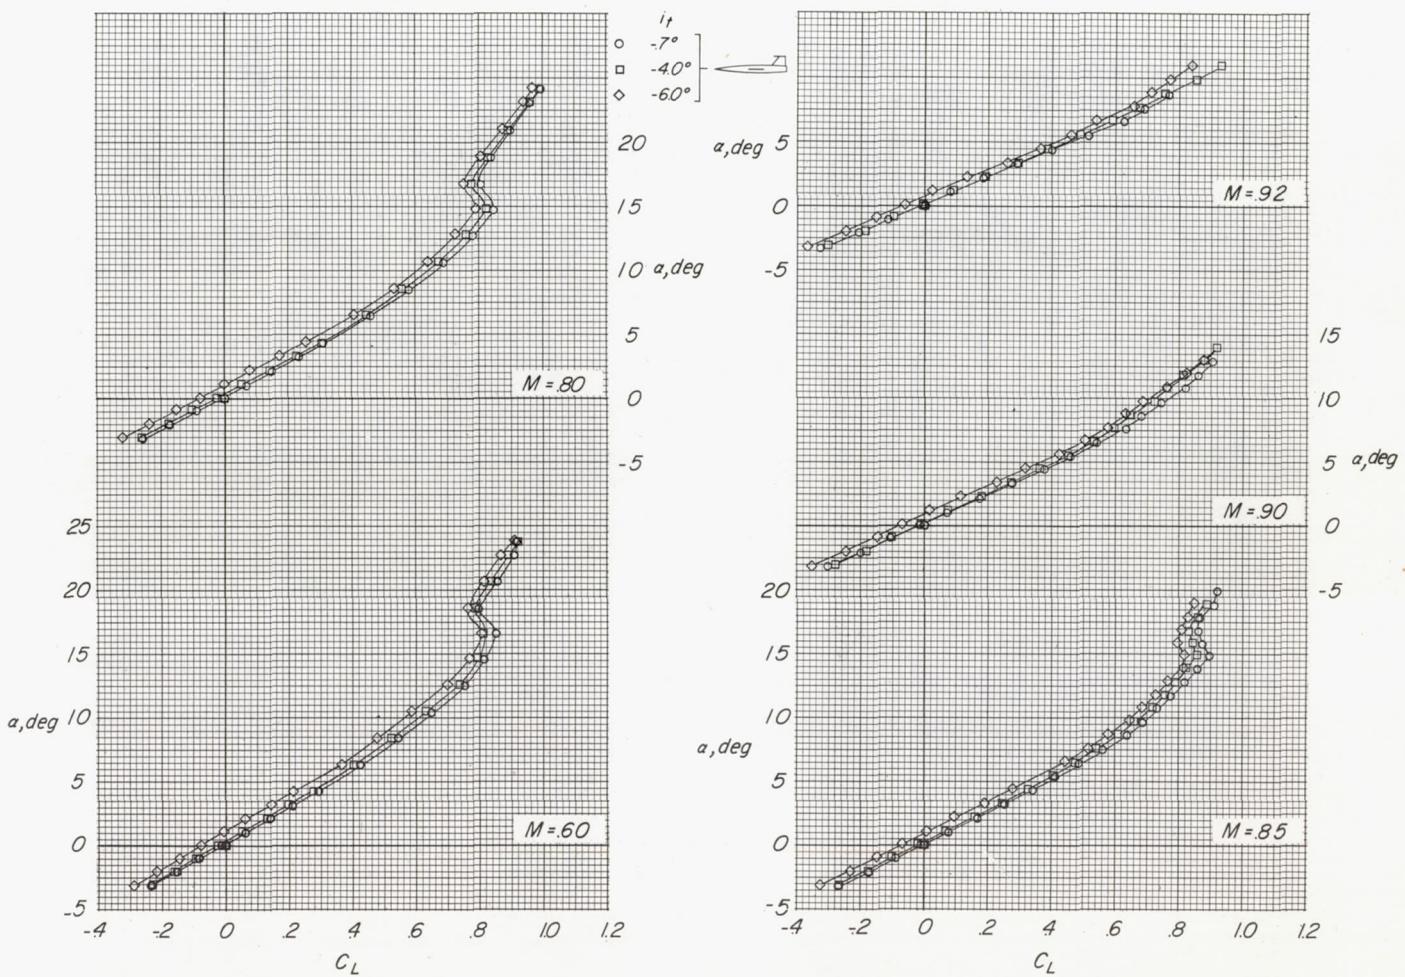
(b) α against C_L .

Figure 7.- Continued.

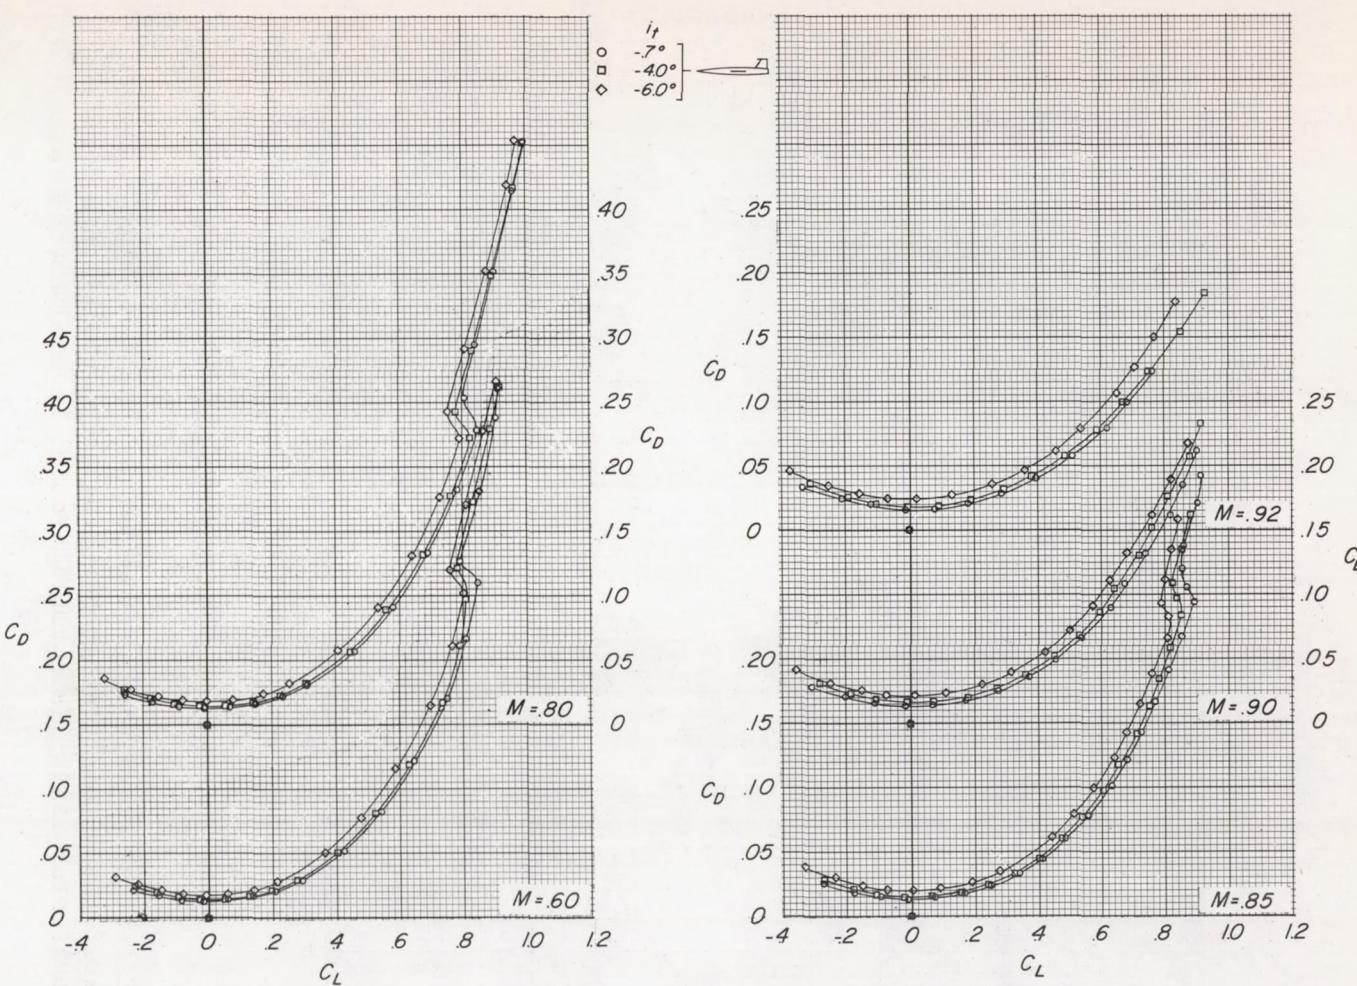
(c) C_D against C_L .

Figure 7.- Concluded.

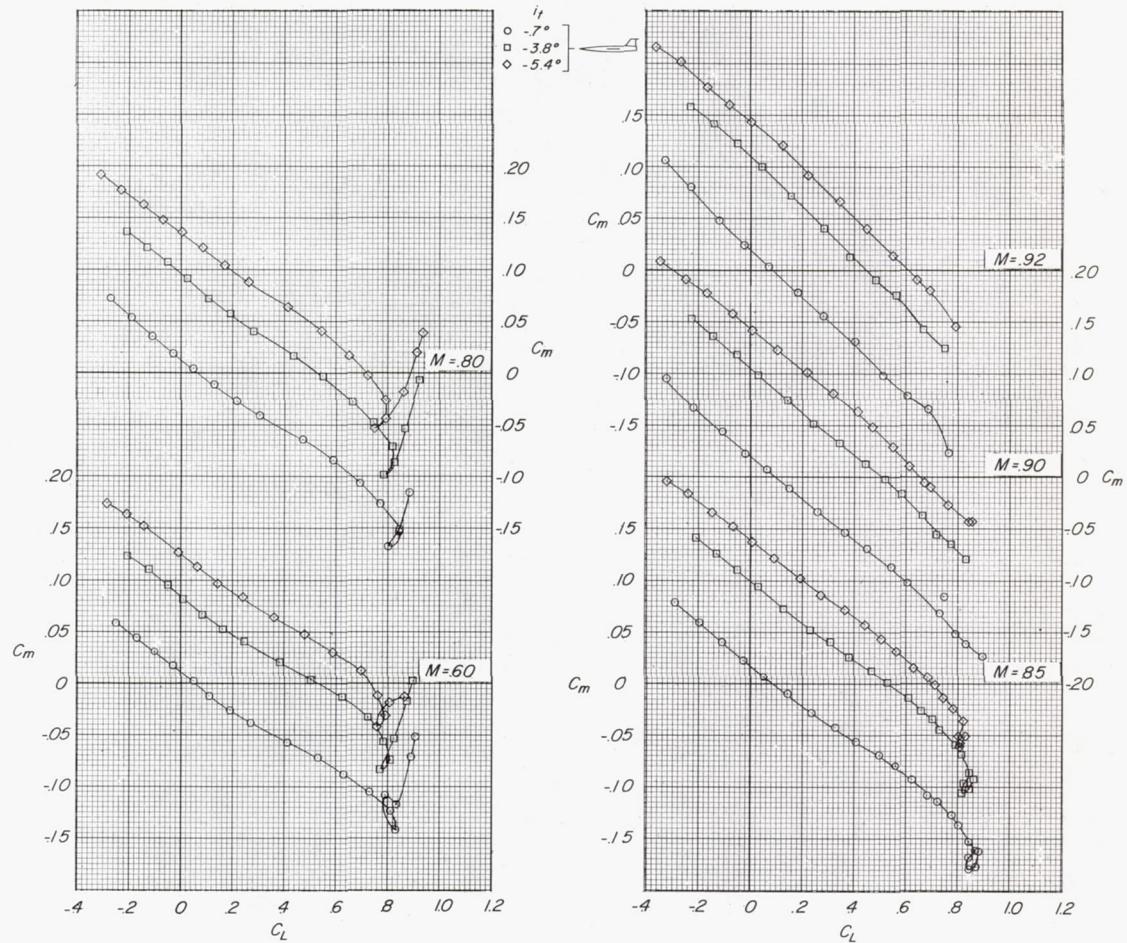
(a) C_m against C_L .

Figure 8.- Effect of stabilizer deflection on the aerodynamic characteristics of the T-tail configuration without leading-edge overhang of the horizontal tail. Tail configuration 6; wing aspect ratio, 3.50.

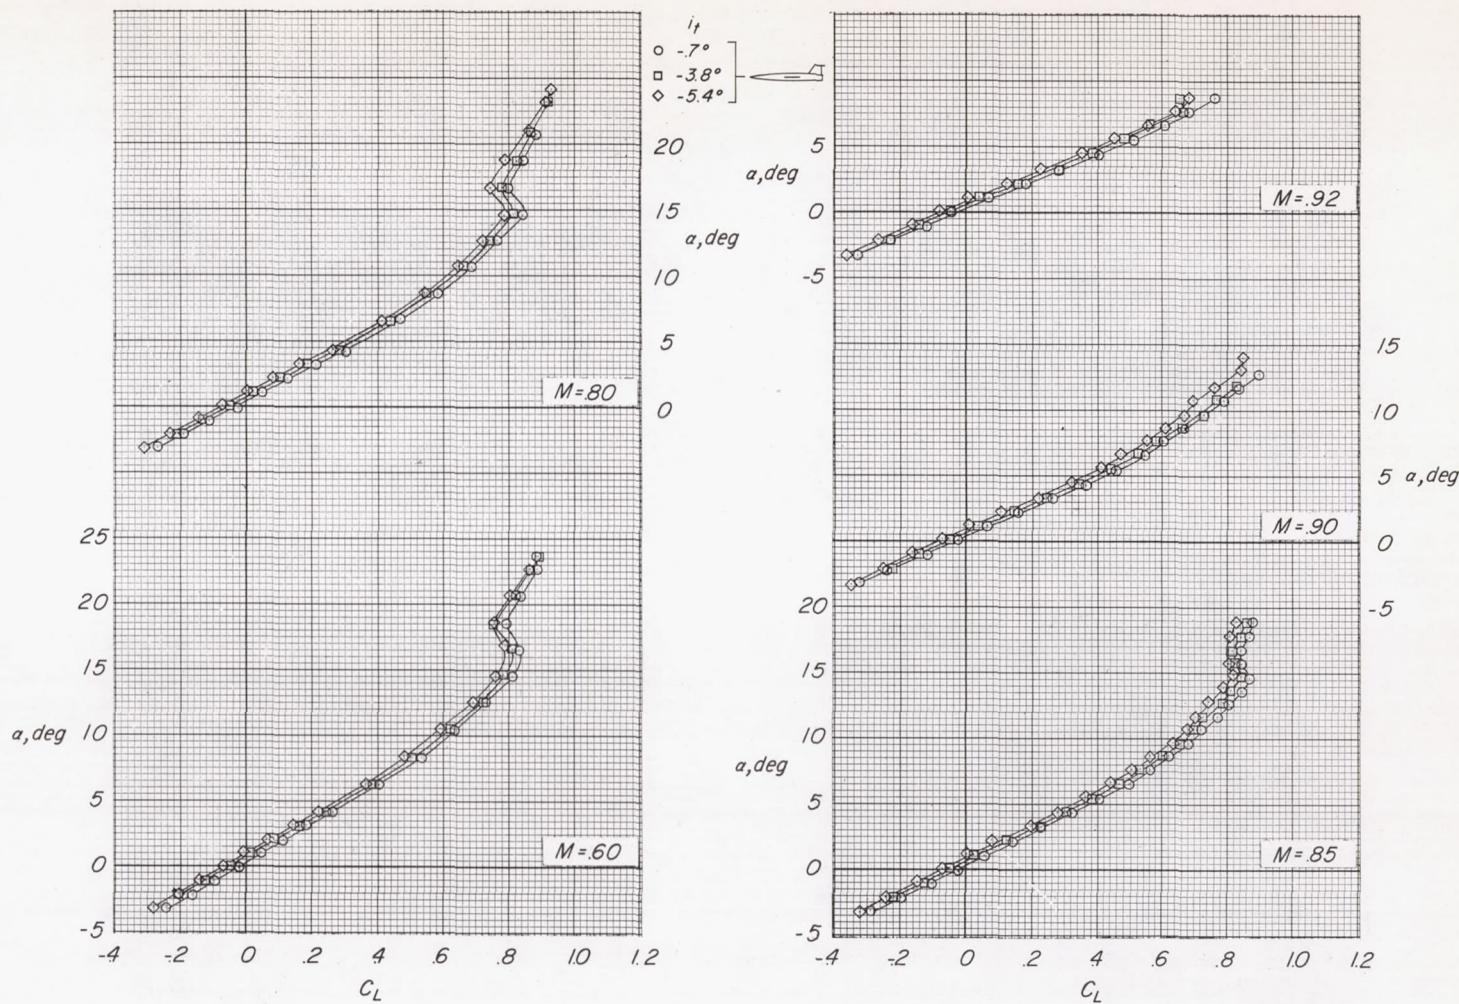
(b) α against C_L .

Figure 8.- Continued.

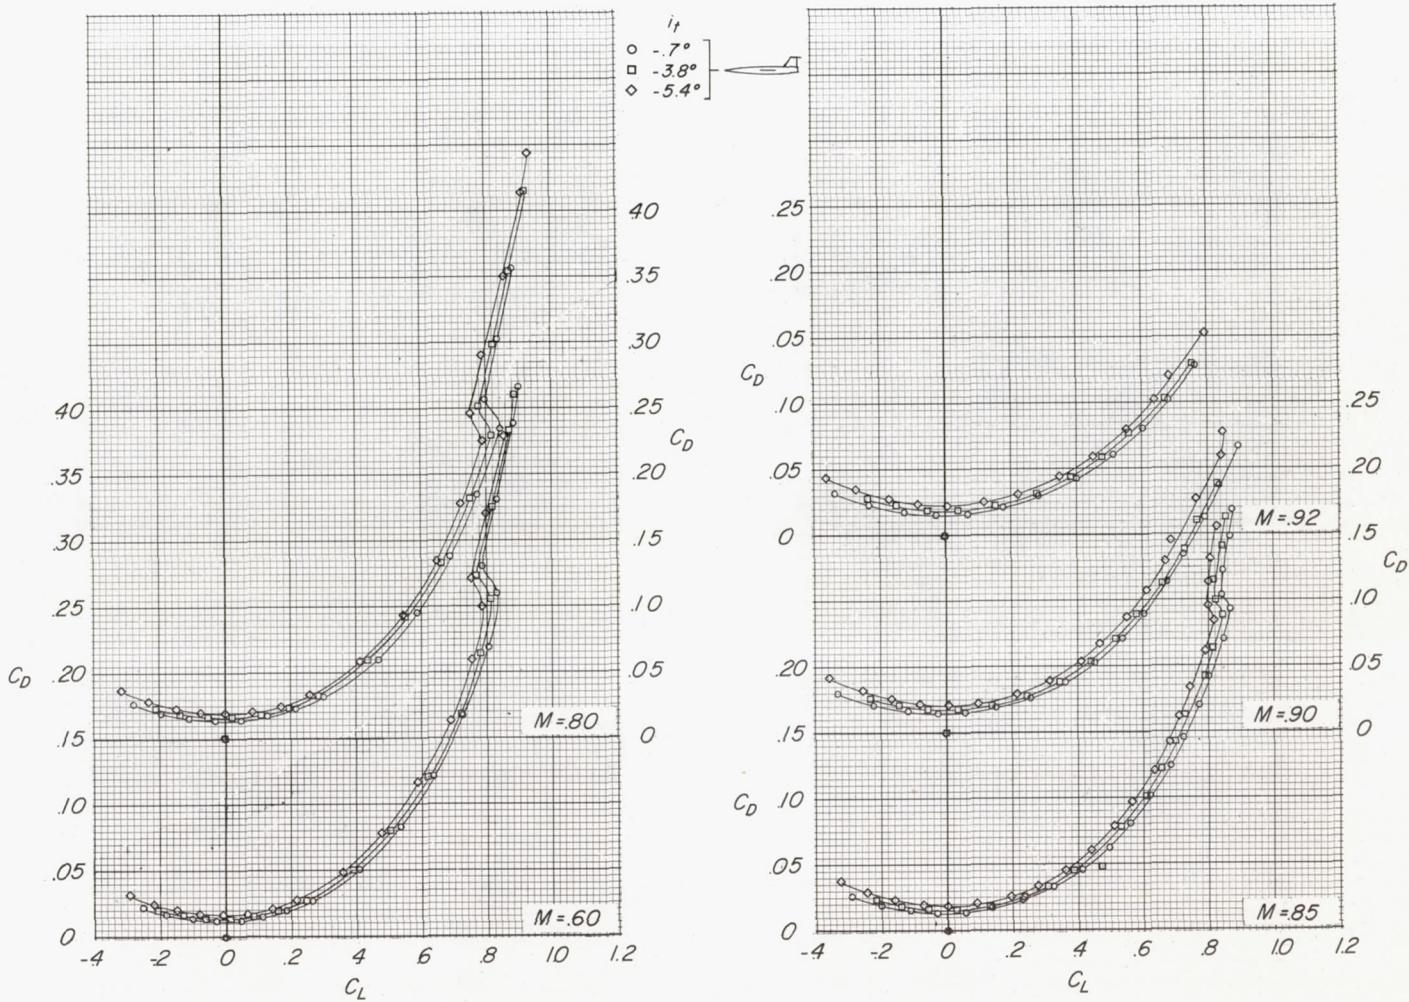
(c) C_D against C_L .

Figure 8.- Concluded.

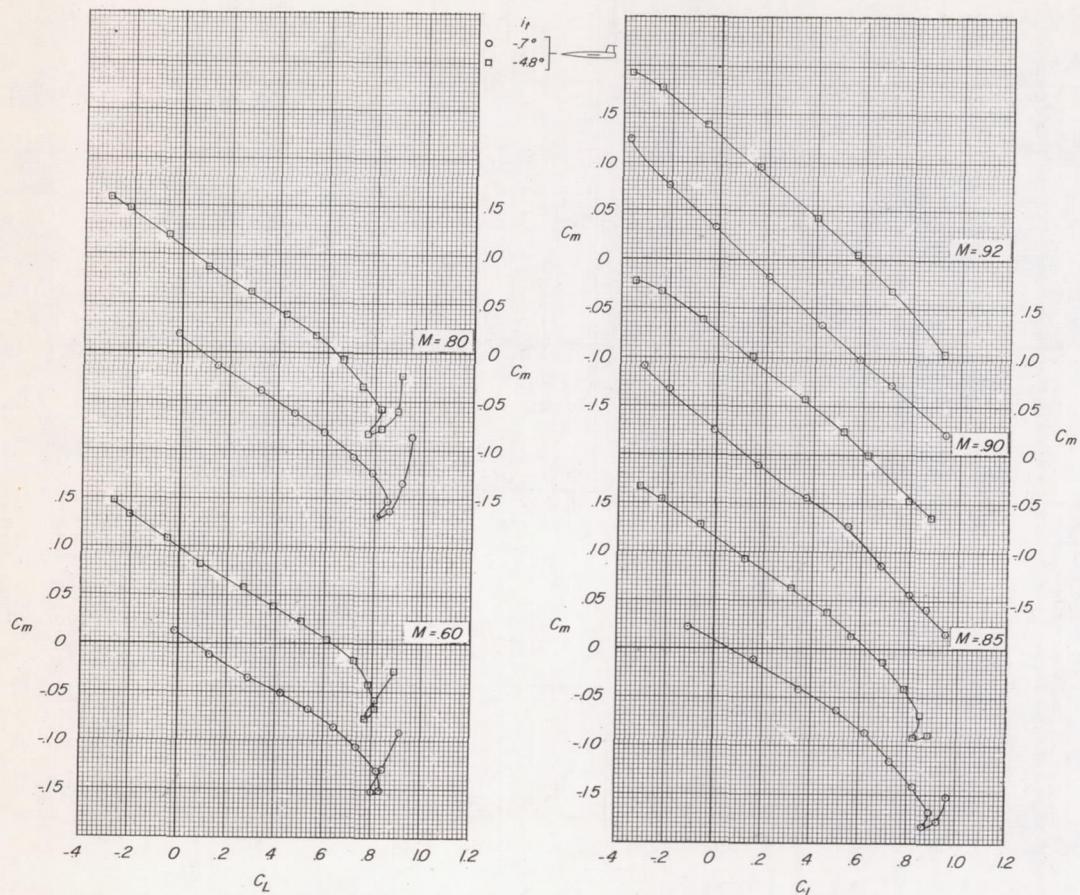
(a) C_m against C_L .

Figure 9.- Effect of stabilizer deflection on the aerodynamic characteristics of the T-tail without leading-edge overhang and mounted on a reduced sweep vertical tail. Tail configuration 7; wing aspect ratio, 3.50.

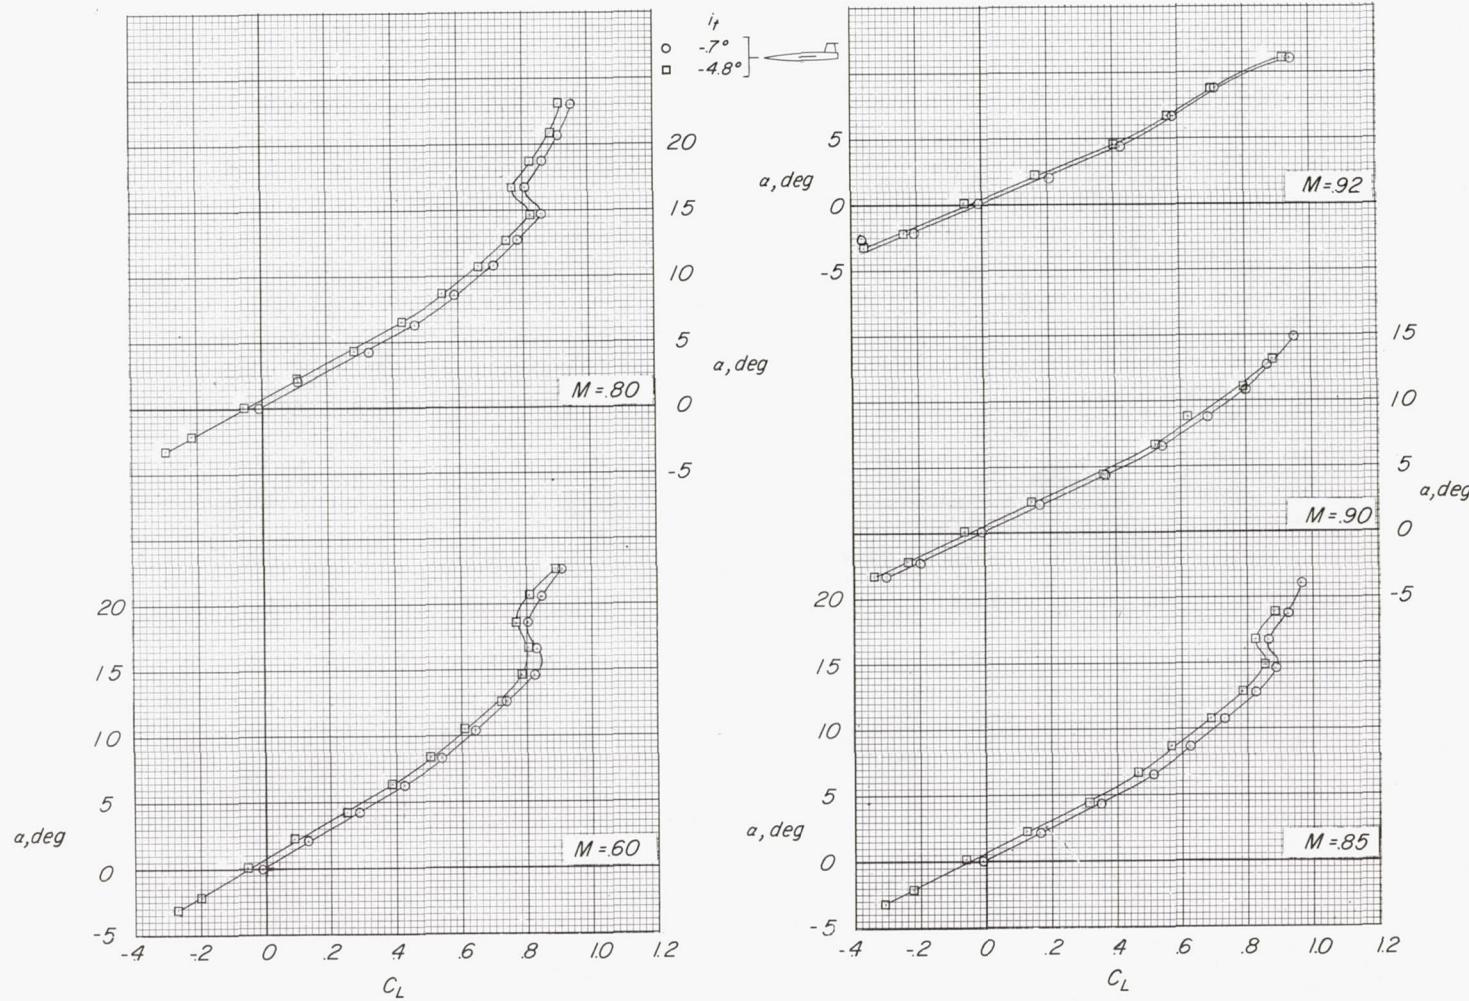
(b) α against C_L .

Figure 9.- Continued.

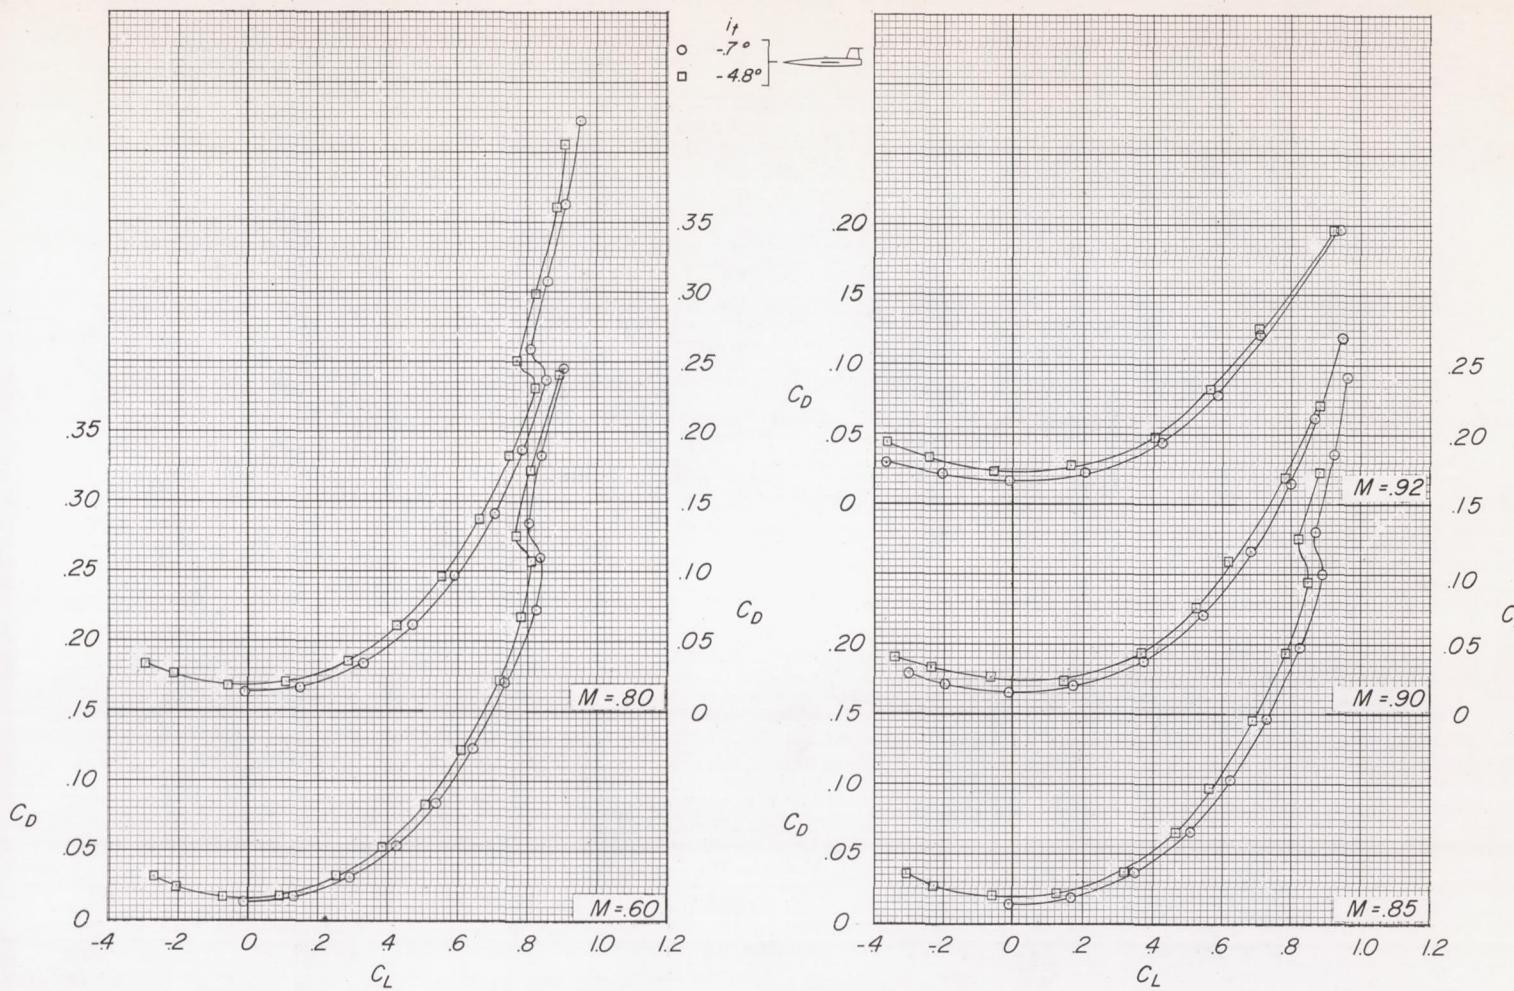
(c) C_D against C_L .

Figure 9.- Concluded.

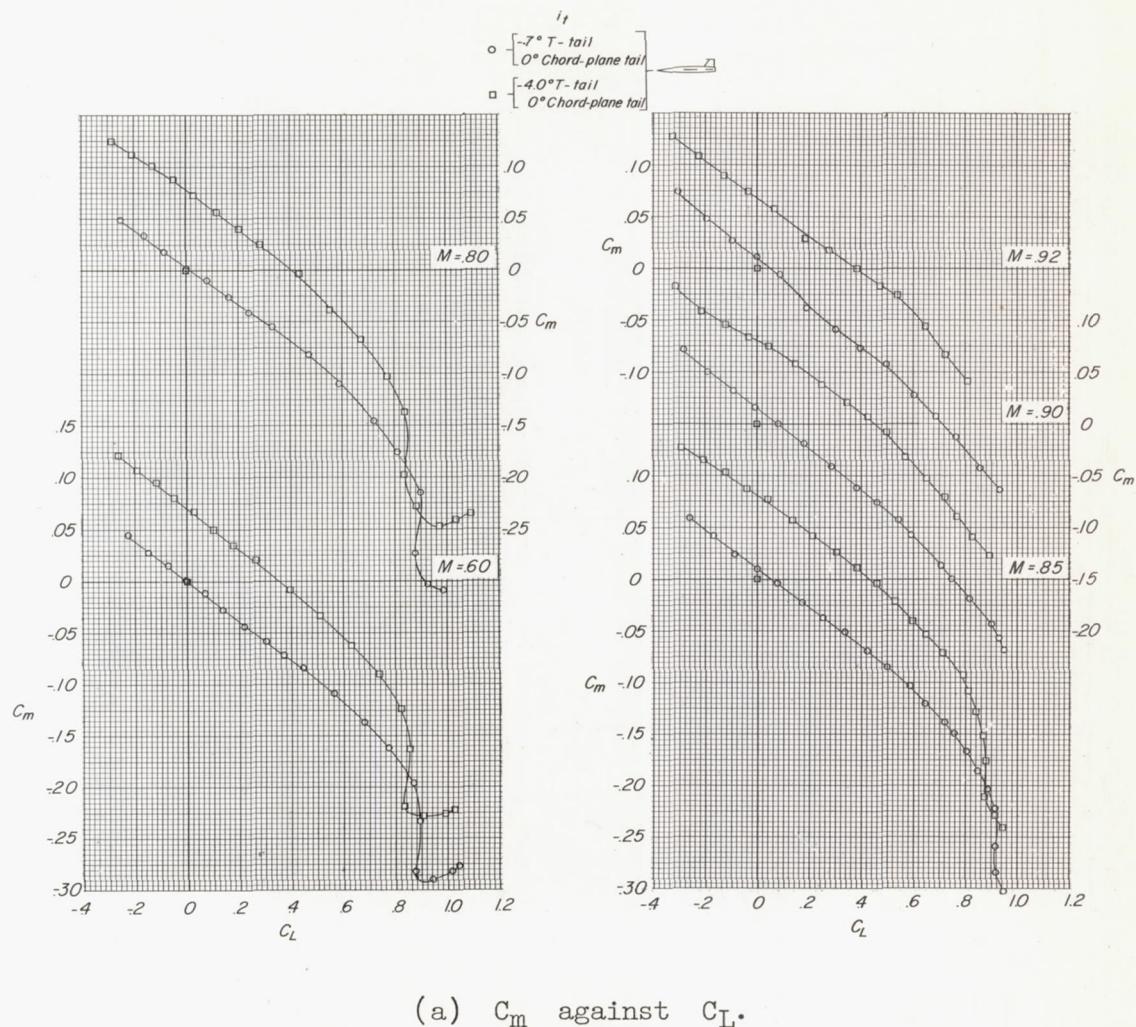
(a) C_m against C_L .

Figure 10.- Effect of stabilizer deflection on the aerodynamic characteristics of the biplane-tail configuration. Tail configuration 5; wing aspect ratio, 3.50.

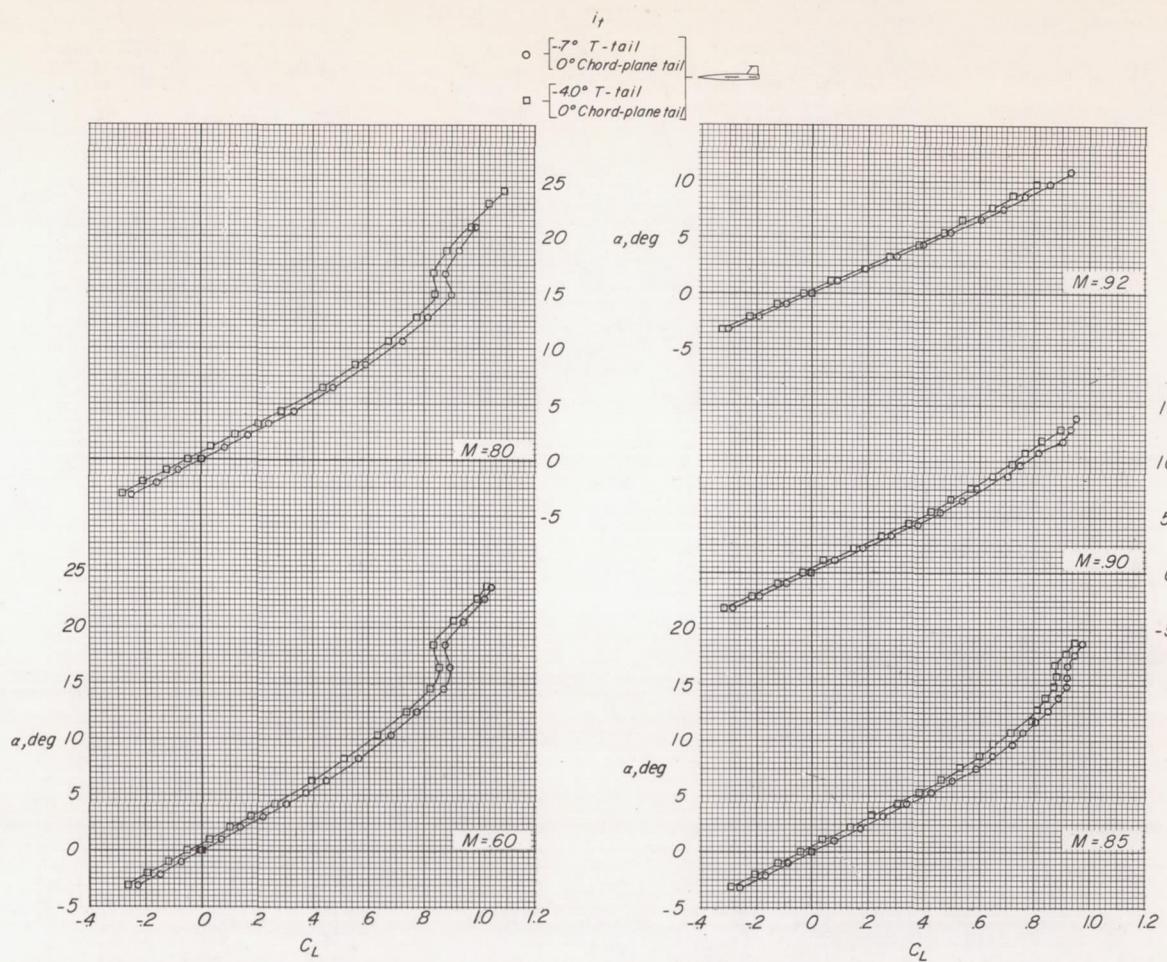
(b) α against C_L .

Figure 10.- Continued.

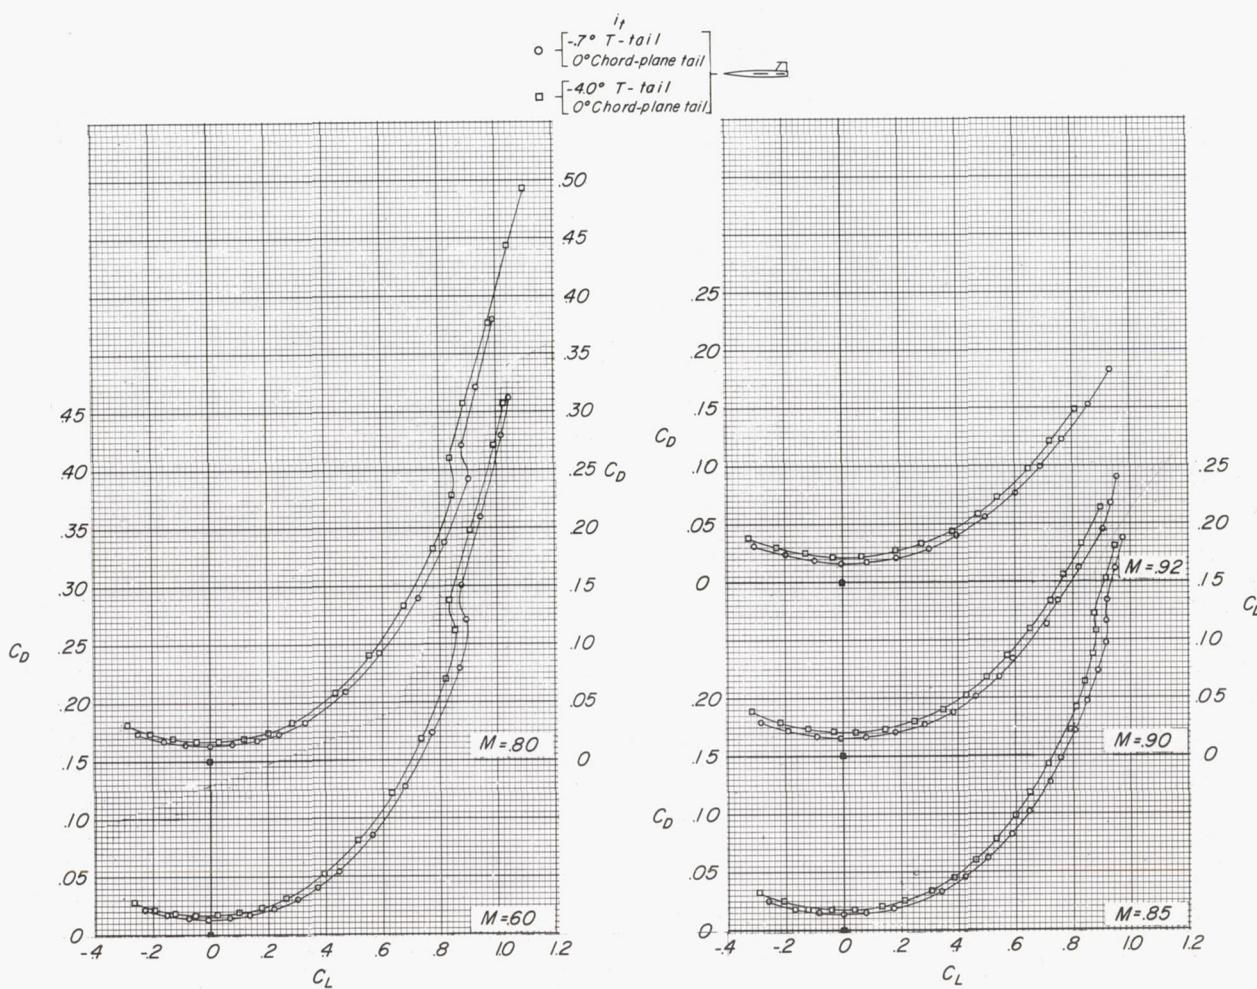
(c) C_D against C_L .

Figure 10.- Concluded.

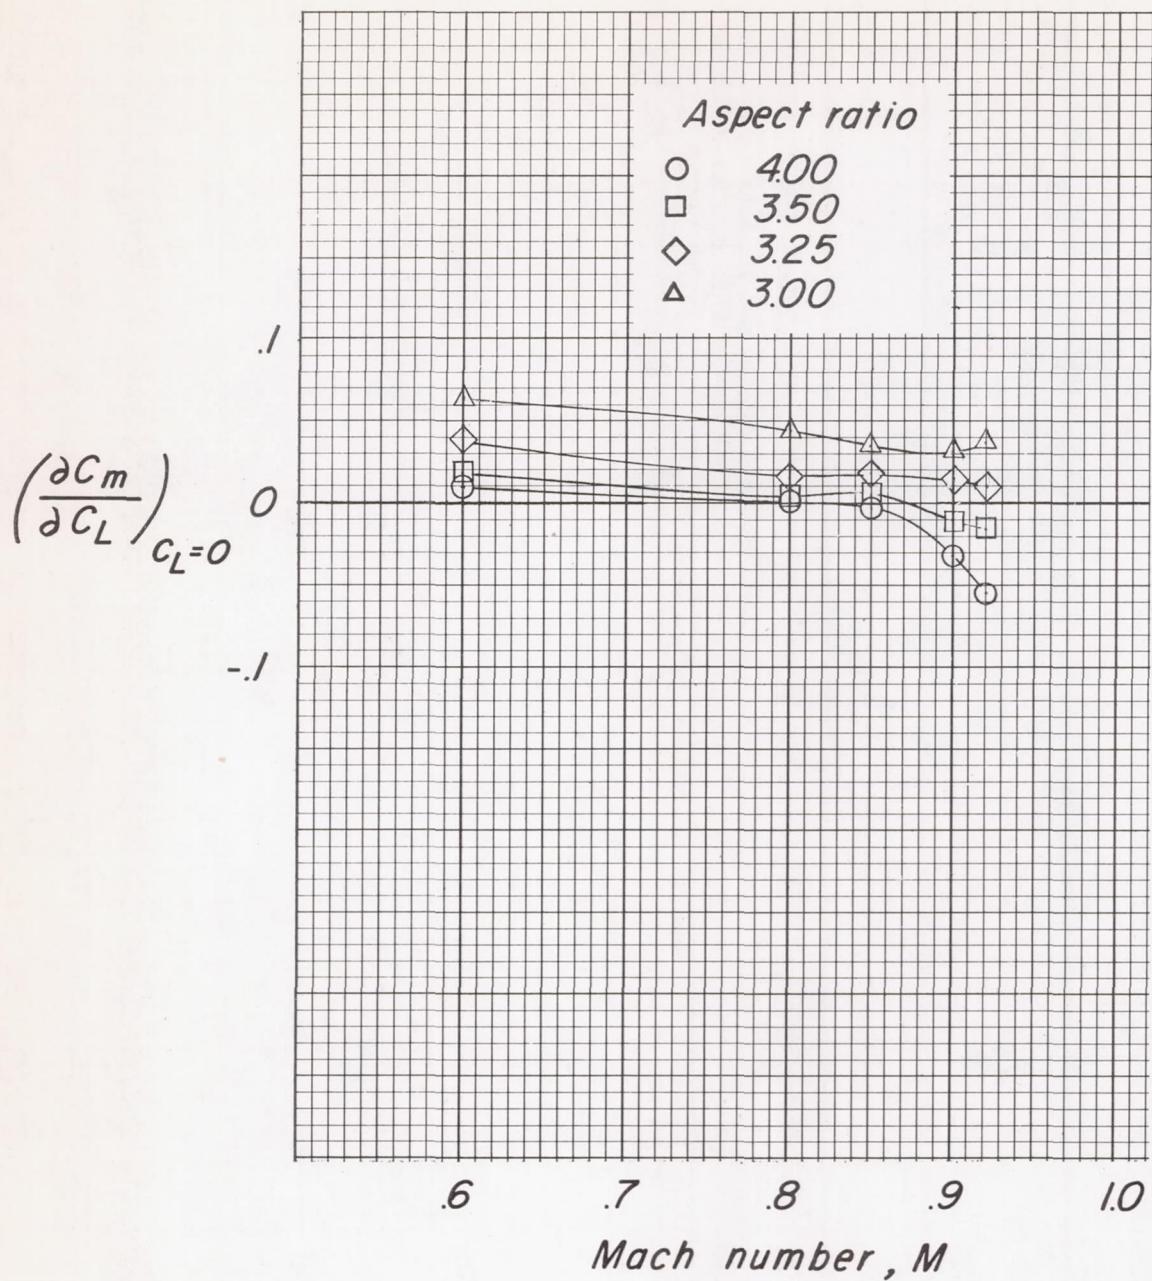


Figure 11.- Variation of $\left(\frac{\partial C_m}{\partial C_L}\right)_{C_L=0}$ with Mach number for the wing-fuselage model for various wing aspect ratios.

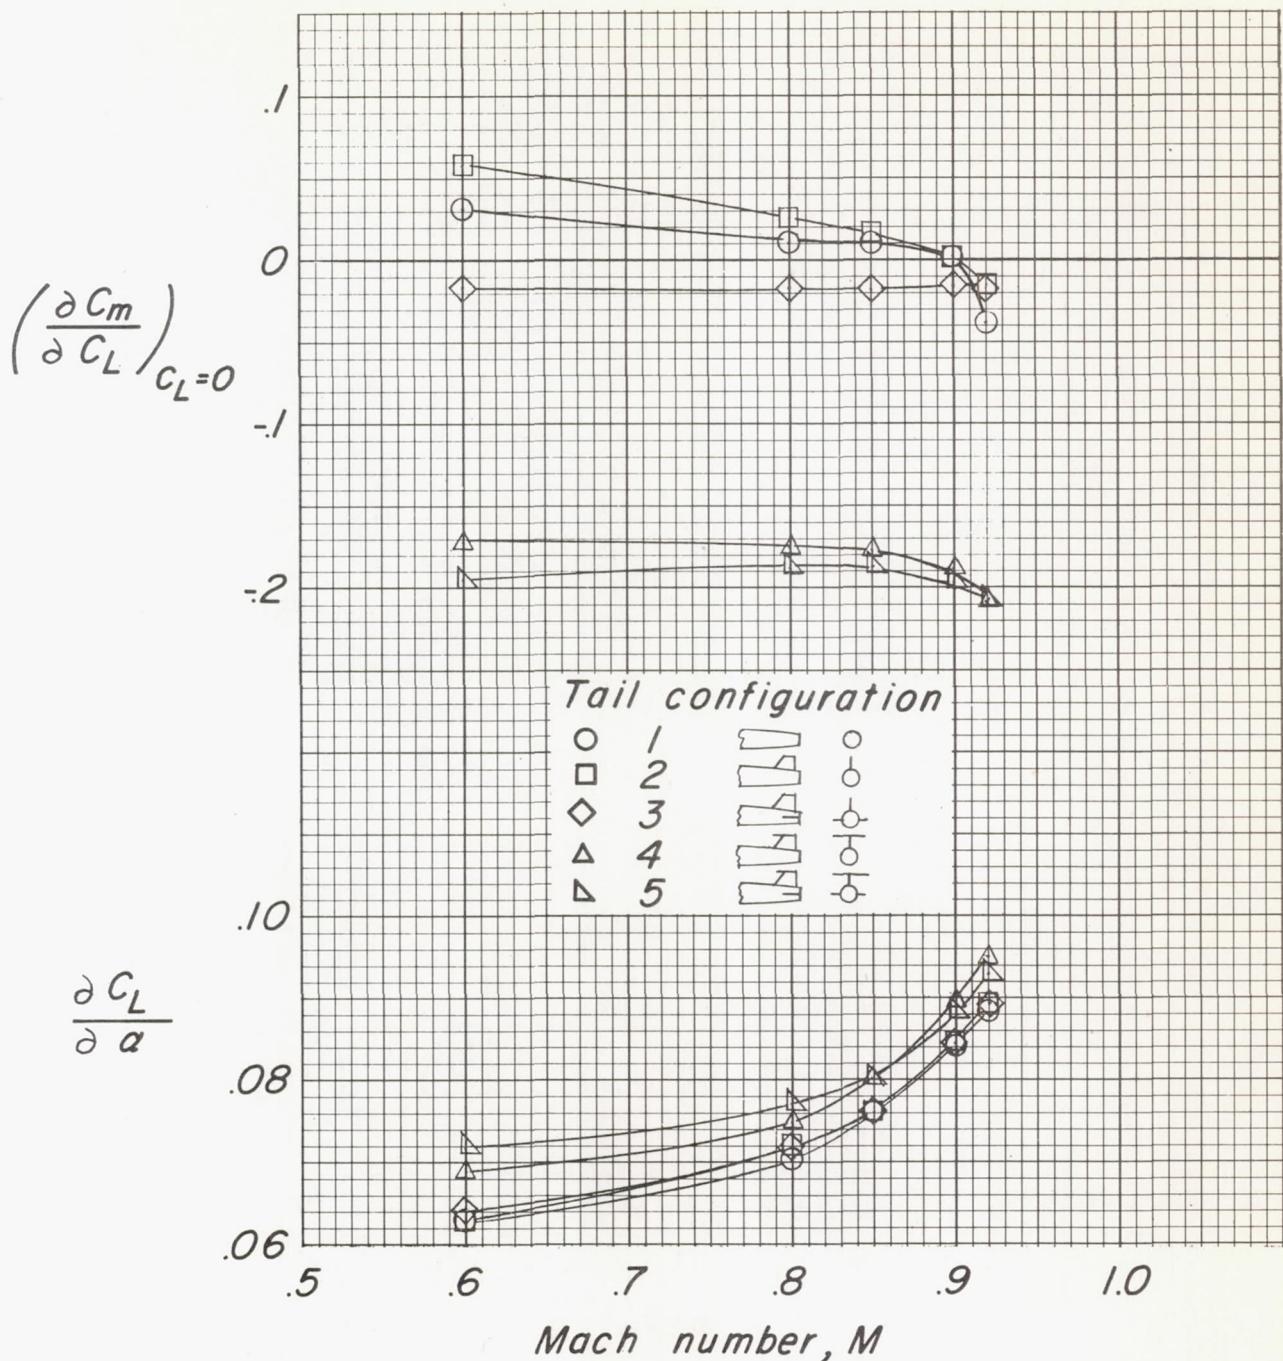


Figure 12.- Variation of $\left(\frac{\partial C_m}{\partial C_L}\right)_{C_L=0}$ and lift-curve slope with Mach number for the model with the aspect-ratio-3.50 wing and various tail configurations.

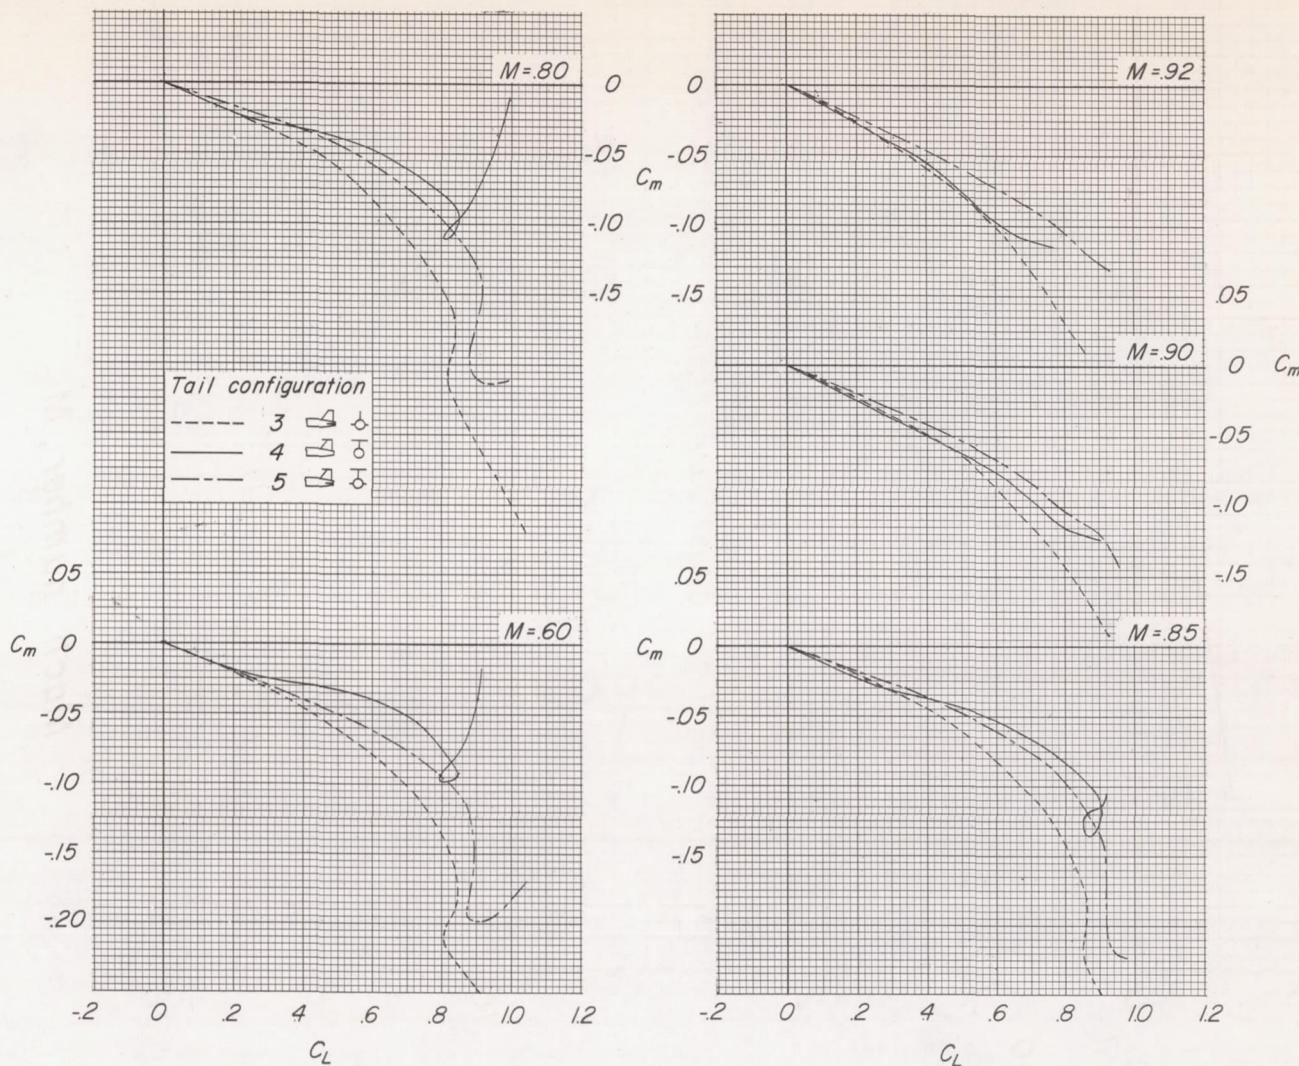


Figure 13.- Longitudinal stability characteristics of the aspect-ratio-3.50 model with several tail configurations adjusted to give a $-0.10\bar{c}$ static margin at $M = 0.60$.

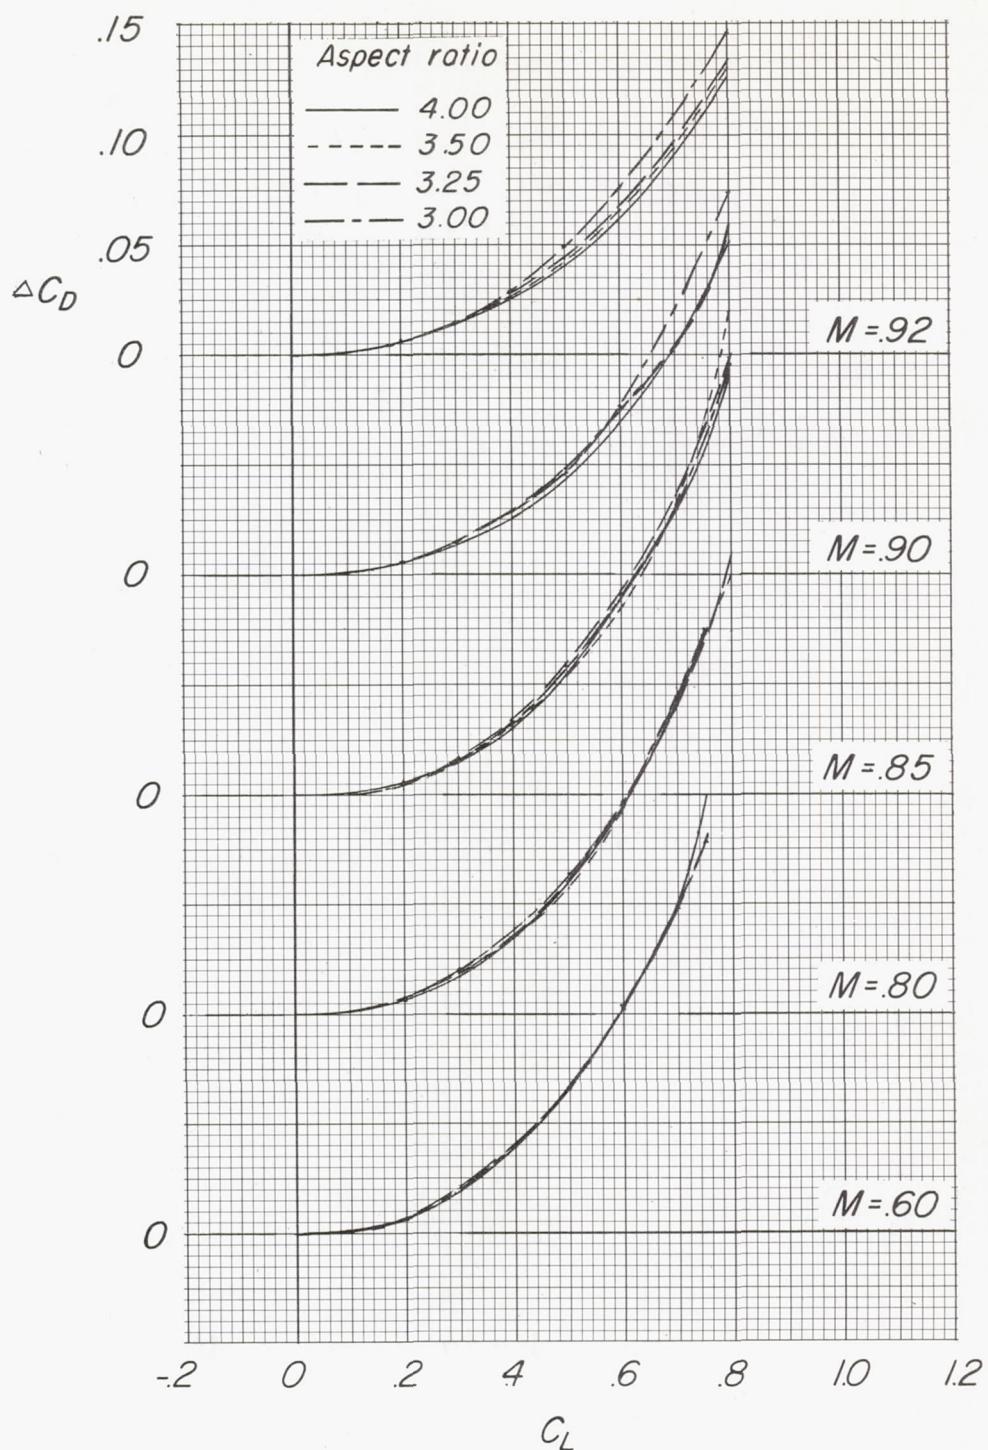


Figure 14.- Effect of aspect ratio on drag due to lift. Tail off.

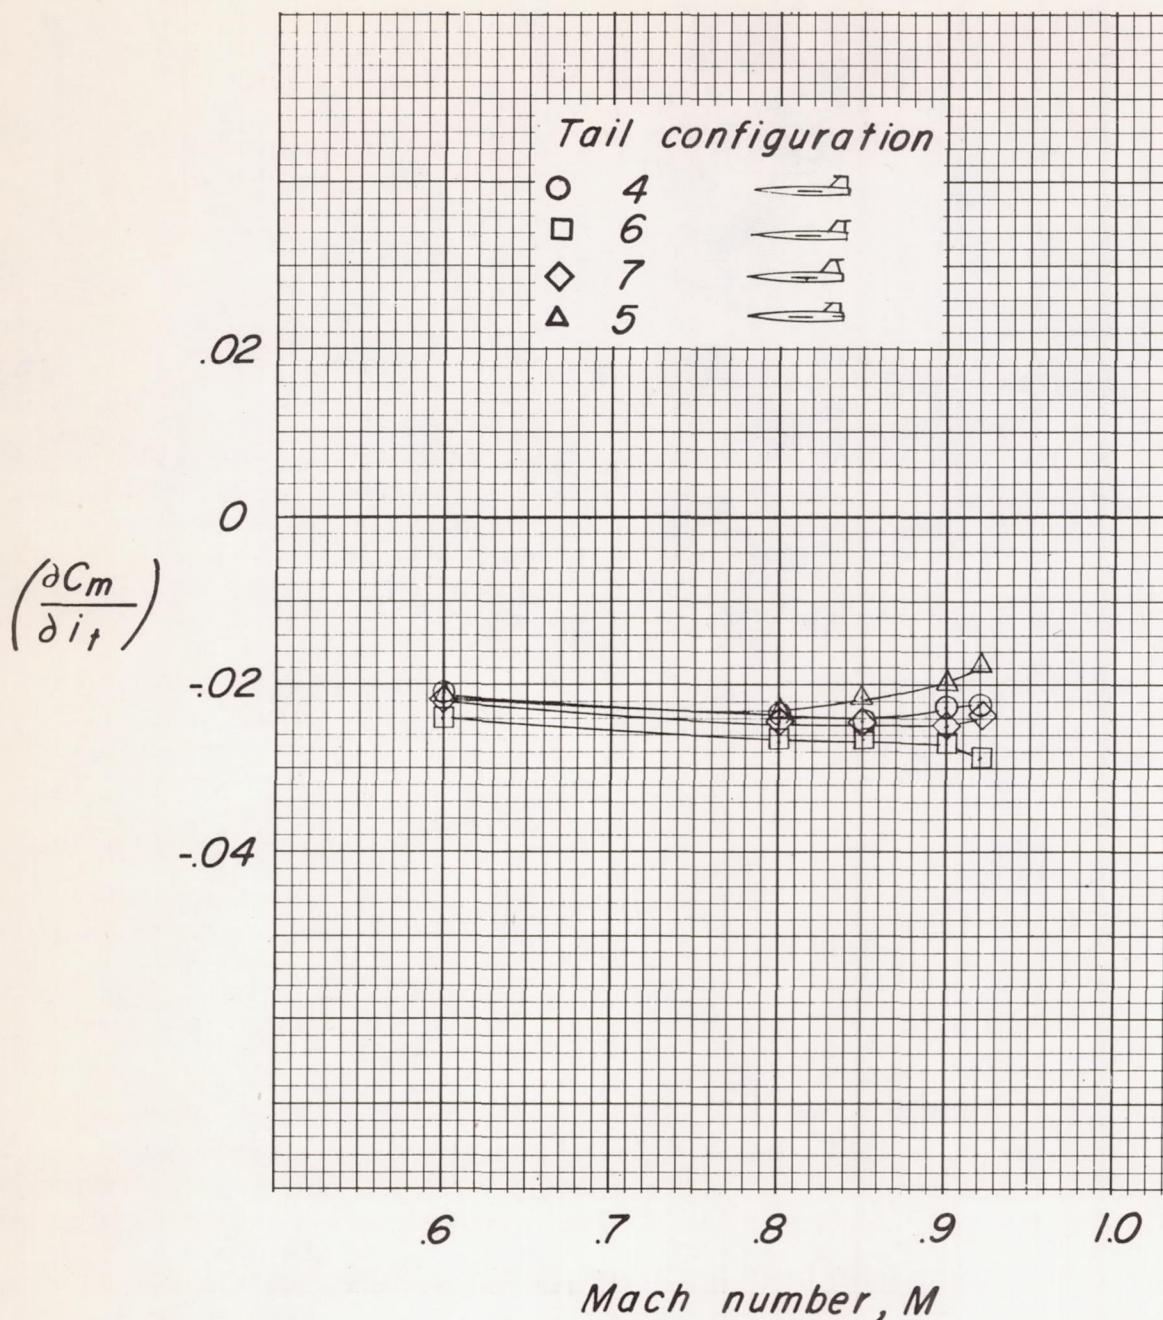


Figure 15.- Variation of stabilizer effectiveness with Mach number for the model with the aspect-ratio-3.50 wing and various tail configurations.

CONFIDENTIAL

CONFIDENTIAL